
Flask Documentation (2.1.x)

Release 2.1.0.dev0

Pallets

Oct 07, 2021

CONTENTS

1	User's Guide	3
1.1	Foreword	3
1.2	Foreword for Experienced Programmers	4
1.3	Installation	4
1.4	Quickstart	6
1.5	Tutorial	20
1.6	Templates	54
1.7	Testing Flask Applications	57
1.8	Handling Application Errors	64
1.9	Debugging Application Errors	72
1.10	Logging	74
1.11	Configuration Handling	77
1.12	Signals	87
1.13	Pluggable Views	89
1.14	The Application Context	93
1.15	The Request Context	95
1.16	Modular Applications with Blueprints	99
1.17	Extensions	103
1.18	Command Line Interface	104
1.19	Development Server	113
1.20	Working with the Shell	114
1.21	Patterns for Flask	116
1.22	Deployment Options	159
1.23	Becoming Big	170
1.24	Using <code>async</code> and <code>await</code>	172
2	API Reference	175
2.1	API	175
3	Additional Notes	263
3.1	Design Decisions in Flask	263
3.2	HTML/XHTML FAQ	266
3.3	Security Considerations	269
3.4	Flask Extension Development	272
3.5	How to contribute to Flask	277
3.6	License	280
3.7	Changes	281
	Python Module Index	301
	Index	303



Welcome to Flask's documentation. Get started with [Installation](#) and then get an overview with the [Quickstart](#). There is also a more detailed [Tutorial](#) that shows how to create a small but complete application with Flask. Common patterns are described in the [Patterns for Flask](#) section. The rest of the docs describe each component of Flask in detail, with a full reference in the [API](#) section.

Flask depends on the [Jinja](#) template engine and the [Werkzeug](#) WSGI toolkit. The documentation for these libraries can be found at:

- [Jinja documentation](#)
- [Werkzeug documentation](#)

USER'S GUIDE

This part of the documentation, which is mostly prose, begins with some background information about Flask, then focuses on step-by-step instructions for web development with Flask.

1.1 Foreword

Read this before you get started with Flask. This hopefully answers some questions about the purpose and goals of the project, and when you should or should not be using it.

1.1.1 What does “micro” mean?

“Micro” does not mean that your whole web application has to fit into a single Python file (although it certainly can), nor does it mean that Flask is lacking in functionality. The “micro” in microframework means Flask aims to keep the core simple but extensible. Flask won't make many decisions for you, such as what database to use. Those decisions that it does make, such as what templating engine to use, are easy to change. Everything else is up to you, so that Flask can be everything you need and nothing you don't.

By default, Flask does not include a database abstraction layer, form validation or anything else where different libraries already exist that can handle that. Instead, Flask supports extensions to add such functionality to your application as if it was implemented in Flask itself. Numerous extensions provide database integration, form validation, upload handling, various open authentication technologies, and more. Flask may be “micro”, but it's ready for production use on a variety of needs.

1.1.2 Configuration and Conventions

Flask has many configuration values, with sensible defaults, and a few conventions when getting started. By convention, templates and static files are stored in subdirectories within the application's Python source tree, with the names `templates` and `static` respectively. While this can be changed, you usually don't have to, especially when getting started.

1.1.3 Growing with Flask

Once you have Flask up and running, you'll find a variety of extensions available in the community to integrate your project for production.

As your codebase grows, you are free to make the design decisions appropriate for your project. Flask will continue to provide a very simple glue layer to the best that Python has to offer. You can implement advanced patterns in SQLAlchemy or another database tool, introduce non-relational data persistence as appropriate, and take advantage of framework-agnostic tools built for WSGI, the Python web interface.

Flask includes many hooks to customize its behavior. Should you need more customization, the Flask class is built for subclassing. If you are interested in that, check out the *Becoming Big* chapter. If you are curious about the Flask design principles, head over to the section about *Design Decisions in Flask*.

1.2 Foreword for Experienced Programmers

1.2.1 Thread-Locals in Flask

One of the design decisions in Flask was that simple tasks should be simple; they should not take a lot of code and yet they should not limit you. Because of that, Flask has a few design choices that some people might find surprising or unorthodox. For example, Flask uses thread-local objects internally so that you don't have to pass objects around from function to function within a request in order to stay threadsafe. This approach is convenient, but requires a valid request context for dependency injection or when attempting to reuse code which uses a value pegged to the request. The Flask project is honest about thread-locals, does not hide them, and calls out in the code and documentation where they are used.

1.2.2 Develop for the Web with Caution

Always keep security in mind when building web applications.

If you write a web application, you are probably allowing users to register and leave their data on your server. The users are entrusting you with data. And even if you are the only user that might leave data in your application, you still want that data to be stored securely.

Unfortunately, there are many ways the security of a web application can be compromised. Flask protects you against one of the most common security problems of modern web applications: cross-site scripting (XSS). Unless you deliberately mark insecure HTML as secure, Flask and the underlying Jinja2 template engine have you covered. But there are many more ways to cause security problems.

The documentation will warn you about aspects of web development that require attention to security. Some of these security concerns are far more complex than one might think, and we all sometimes underestimate the likelihood that a vulnerability will be exploited - until a clever attacker figures out a way to exploit our applications. And don't think that your application is not important enough to attract an attacker. Depending on the kind of attack, chances are that automated bots are probing for ways to fill your database with spam, links to malicious software, and the like.

Flask is no different from any other framework in that you the developer must build with caution, watching for exploits when building to your requirements.

1.3 Installation

1.3.1 Python Version

We recommend using the latest version of Python. Flask supports Python 3.6 and newer.

async support in Flask requires Python 3.7+ for `contextvars.ContextVar`.

1.3.2 Dependencies

These distributions will be installed automatically when installing Flask.

- [Werkzeug](#) implements WSGI, the standard Python interface between applications and servers.
- [Jinja](#) is a template language that renders the pages your application serves.
- [MarkupSafe](#) comes with Jinja. It escapes untrusted input when rendering templates to avoid injection attacks.
- [ItsDangerous](#) securely signs data to ensure its integrity. This is used to protect Flask's session cookie.
- [Click](#) is a framework for writing command line applications. It provides the `flask` command and allows adding custom management commands.

Optional dependencies

These distributions will not be installed automatically. Flask will detect and use them if you install them.

- `Blinker` provides support for *Signals*.
- `python-dotenv` enables support for *Environment Variables From dotenv* when running `flask` commands.
- `Watchdog` provides a faster, more efficient reloader for the development server.

1.3.3 Virtual environments

Use a virtual environment to manage the dependencies for your project, both in development and in production.

What problem does a virtual environment solve? The more Python projects you have, the more likely it is that you need to work with different versions of Python libraries, or even Python itself. Newer versions of libraries for one project can break compatibility in another project.

Virtual environments are independent groups of Python libraries, one for each project. Packages installed for one project will not affect other projects or the operating system's packages.

Python comes bundled with the `venv` module to create virtual environments.

Create an environment

Create a project folder and a `venv` folder within:

macOS/Linux

Windows

```
$ mkdir myproject
$ cd myproject
$ python3 -m venv venv
```

```
> mkdir myproject
> cd myproject
> py -3 -m venv venv
```

Activate the environment

Before you work on your project, activate the corresponding environment:

macOS/Linux

Windows

```
$ . venv/bin/activate
```

```
> venv\Scripts\activate
```

Your shell prompt will change to show the name of the activated environment.

1.3.4 Install Flask

Within the activated environment, use the following command to install Flask:

```
$ pip install Flask
```

Flask is now installed. Check out the [Quickstart](#) or go to the [Documentation Overview](#).

1.4 Quickstart

Eager to get started? This page gives a good introduction to Flask. Follow [Installation](#) to set up a project and install Flask first.

1.4.1 A Minimal Application

A minimal Flask application looks something like this:

```
from flask import Flask

app = Flask(__name__)

@app.route("/")
def hello_world():
    return "<p>Hello, World!</p>"
```

So what did that code do?

1. First we imported the `Flask` class. An instance of this class will be our WSGI application.
2. Next we create an instance of this class. The first argument is the name of the application's module or package. `__name__` is a convenient shortcut for this that is appropriate for most cases. This is needed so that Flask knows where to look for resources such as templates and static files.
3. We then use the `route()` decorator to tell Flask what URL should trigger our function.
4. The function returns the message we want to display in the user's browser. The default content type is HTML, so HTML in the string will be rendered by the browser.

Save it as `hello.py` or something similar. Make sure to not call your application `flask.py` because this would conflict with Flask itself.

To run the application, use the `flask` command or `python -m flask`. Before you can do that you need to tell your terminal the application to work with by exporting the `FLASK_APP` environment variable:

Bash

CMD

Powershell

```
$ export FLASK_APP=hello
$ flask run
* Running on http://127.0.0.1:5000/
```

```
> set FLASK_APP=hello
> flask run
* Running on http://127.0.0.1:5000/
```

```
> $env:FLASK_APP = "hello"
> flask run
* Running on http://127.0.0.1:5000/
```

Application Discovery Behavior

As a shortcut, if the file is named `app.py` or `wsgi.py`, you don't have to set the `FLASK_APP` environment variable. See [Command Line Interface](#) for more details.

This launches a very simple builtin server, which is good enough for testing but probably not what you want to use in production. For deployment options see [Deployment Options](#).

Now head over to <http://127.0.0.1:5000/>, and you should see your hello world greeting.

Externally Visible Server

If you run the server you will notice that the server is only accessible from your own computer, not from any other in the network. This is the default because in debugging mode a user of the application can execute arbitrary Python code on your computer.

If you have the debugger disabled or trust the users on your network, you can make the server publicly available simply by adding `--host=0.0.0.0` to the command line:

```
$ flask run --host=0.0.0.0
```

This tells your operating system to listen on all public IPs.

1.4.2 What to do if the Server does not Start

In case the `python -m flask` fails or `flask` does not exist, there are multiple reasons this might be the case. First of all you need to look at the error message.

Old Version of Flask

Versions of Flask older than 0.11 used to have different ways to start the application. In short, the `flask` command did not exist, and neither did `python -m flask`. In that case you have two options: either upgrade to newer Flask versions or have a look at [Development Server](#) to see the alternative method for running a server.


Invalid Import Name

The `FLASK_APP` environment variable is the name of the module to import at `flask run`. In case that module is incorrectly named you will get an import error upon start (or if debug is enabled when you navigate to the application). It will tell you what it tried to import and why it failed.

The most common reason is a typo or because you did not actually create an `app` object.

1.4.3 Debug Mode

The `flask run` command can do more than just start the development server. By enabling debug mode, the server will automatically reload if code changes, and will show an interactive debugger in the browser if an error occurs during a request.

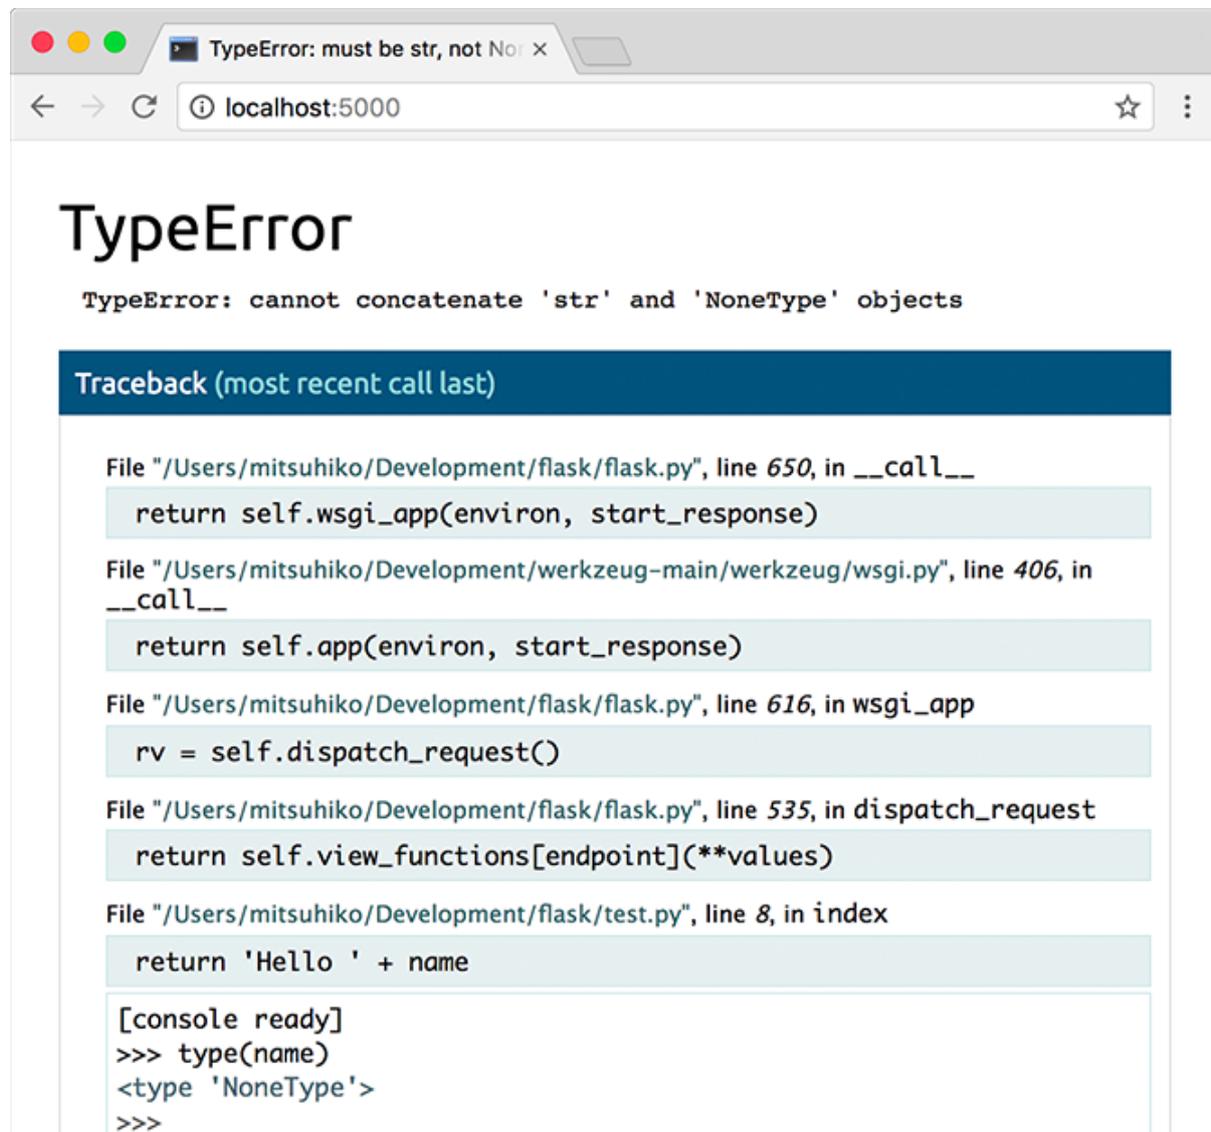

Warning: The debugger allows executing arbitrary Python code from the browser. It is protected by a pin, but still represents a major security risk. Do not run the development server or debugger in a production environment.

To enable all development features, set the `FLASK_ENV` environment variable to `development` before calling `flask run`.

Bash

CMD

Powershell

```
$ export FLASK_ENV=development
$ flask run
```

```
> set FLASK_ENV=development
> flask run
```

```
> $env:FLASK_ENV = "development"
> flask run
```

See also:

- *Development Server* and *Command Line Interface* for information about running in development mode.
- *Debugging Application Errors* for information about using the built-in debugger and other debuggers.
- *Logging* and *Handling Application Errors* to log errors and display nice error pages.

1.4.4 HTML Escaping

When returning HTML (the default response type in Flask), any user-provided values rendered in the output must be escaped to protect from injection attacks. HTML templates rendered with Jinja, introduced later, will do this automatically.

`escape()`, shown here, can be used manually. It is omitted in most examples for brevity, but you should always be aware of how you're using untrusted data.

```
from markupsafe import escape

@app.route("/<name>")
def hello(name):
    return f"Hello, {escape(name)}!"
```

If a user managed to submit the name `<script>alert("bad")</script>`, escaping causes it to be rendered as text, rather than running the script in the user's browser.

`<name>` in the route captures a value from the URL and passes it to the view function. These variable rules are explained below.

1.4.5 Routing

Modern web applications use meaningful URLs to help users. Users are more likely to like a page and come back if the page uses a meaningful URL they can remember and use to directly visit a page.

Use the `route()` decorator to bind a function to a URL.

```
@app.route('/')
def index():
    return 'Index Page'

@app.route('/hello')
def hello():
    return 'Hello, World'
```

You can do more! You can make parts of the URL dynamic and attach multiple rules to a function.

Variable Rules

You can add variable sections to a URL by marking sections with `<variable_name>`. Your function then receives the `<variable_name>` as a keyword argument. Optionally, you can use a converter to specify the type of the argument like `<converter:variable_name>`.

```
from markupsafe import escape

@app.route('/user/<username>')
def show_user_profile(username):
    # show the user profile for that user
    return f'User {escape(username)}'

@app.route('/post/<int:post_id>')
def show_post(post_id):
    # show the post with the given id, the id is an integer
    return f'Post {post_id}'

@app.route('/path/<path:subpath>')
def show_subpath(subpath):
    # show the subpath after /path/
    return f'Subpath {escape(subpath)}'
```

Converter types:

<code>string</code>	(default) accepts any text without a slash
<code>int</code>	accepts positive integers
<code>float</code>	accepts positive floating point values
<code>path</code>	like <code>string</code> but also accepts slashes
<code>uuid</code>	accepts UUID strings

Unique URLs / Redirection Behavior

The following two rules differ in their use of a trailing slash.

```
@app.route('/projects/')
def projects():
    return 'The project page'

@app.route('/about')
def about():
    return 'The about page'
```

The canonical URL for the `projects` endpoint has a trailing slash. It's similar to a folder in a file system. If you access the URL without a trailing slash (`/projects`), Flask redirects you to the canonical URL with the trailing slash (`/projects/`).

The canonical URL for the `about` endpoint does not have a trailing slash. It's similar to the pathname of a file. Accessing the URL with a trailing slash (`/about/`) produces a 404 "Not Found" error. This helps keep URLs unique for these resources, which helps search engines avoid indexing the same page twice.

URL Building

To build a URL to a specific function, use the `url_for()` function. It accepts the name of the function as its first argument and any number of keyword arguments, each corresponding to a variable part of the URL rule. Unknown variable parts are appended to the URL as query parameters.

Why would you want to build URLs using the URL reversing function `url_for()` instead of hard-coding them into your templates?

1. Reversing is often more descriptive than hard-coding the URLs.
2. You can change your URLs in one go instead of needing to remember to manually change hard-coded URLs.
3. URL building handles escaping of special characters transparently.
4. The generated paths are always absolute, avoiding unexpected behavior of relative paths in browsers.
5. If your application is placed outside the URL root, for example, in `/myapplication` instead of `/`, `url_for()` properly handles that for you.

For example, here we use the `test_request_context()` method to try out `url_for()`. `test_request_context()` tells Flask to behave as though it's handling a request even while we use a Python shell. See *Context Locals*.

```
from flask import url_for

@app.route('/')
def index():
    return 'index'

@app.route('/login')
def login():
    return 'login'

@app.route('/user/<username>')
def profile(username):
    return f'{username}'s profile'

with app.test_request_context():
    print(url_for('index'))
    print(url_for('login'))
    print(url_for('login', next='/'))
    print(url_for('profile', username='John Doe'))
```

```
/
/login
/login?next=/
/user/John%20Doe
```

HTTP Methods

Web applications use different HTTP methods when accessing URLs. You should familiarize yourself with the HTTP methods as you work with Flask. By default, a route only answers to GET requests. You can use the `methods` argument of the `route()` decorator to handle different HTTP methods.

```
from flask import request

@app.route('/login', methods=['GET', 'POST'])
def login():
    if request.method == 'POST':
```

(continues on next page)

(continued from previous page)

```
    return do_the_login()
else:
    return show_the_login_form()
```

If GET is present, Flask automatically adds support for the HEAD method and handles HEAD requests according to the [HTTP RFC](#). Likewise, OPTIONS is automatically implemented for you.

1.4.6 Static Files

Dynamic web applications also need static files. That's usually where the CSS and JavaScript files are coming from. Ideally your web server is configured to serve them for you, but during development Flask can do that as well. Just create a folder called `static` in your package or next to your module and it will be available at `/static` on the application.

To generate URLs for static files, use the special `'static'` endpoint name:

```
url_for('static', filename='style.css')
```

The file has to be stored on the filesystem as `static/style.css`.

1.4.7 Rendering Templates

Generating HTML from within Python is not fun, and actually pretty cumbersome because you have to do the HTML escaping on your own to keep the application secure. Because of that Flask configures the [Jinja2](#) template engine for you automatically.

To render a template you can use the `render_template()` method. All you have to do is provide the name of the template and the variables you want to pass to the template engine as keyword arguments. Here's a simple example of how to render a template:

```
from flask import render_template

@app.route('/hello/')
@app.route('/hello/<name>')
def hello(name=None):
    return render_template('hello.html', name=name)
```

Flask will look for templates in the `templates` folder. So if your application is a module, this folder is next to that module, if it's a package it's actually inside your package:

Case 1: a module:

```
/application.py
/templates
  /hello.html
```

Case 2: a package:

```
/application
  /__init__.py
  /templates
    /hello.html
```

For templates you can use the full power of Jinja2 templates. Head over to the official [Jinja2 Template Documentation](#) for more information.

Here is an example template:

```
<!doctype html>
<title>Hello from Flask</title>
{% if name %}
  <h1>Hello {{ name }}!</h1>
{% else %}
  <h1>Hello, World!</h1>
{% endif %}
```

Inside templates you also have access to the `config`, `request`, `session` and `g`¹ objects as well as the `url_for()` and `get_flashed_messages()` functions.

Templates are especially useful if inheritance is used. If you want to know how that works, see *Template Inheritance*. Basically template inheritance makes it possible to keep certain elements on each page (like header, navigation and footer).

Automatic escaping is enabled, so if `name` contains HTML it will be escaped automatically. If you can trust a variable and you know that it will be safe HTML (for example because it came from a module that converts wiki markup to HTML) you can mark it as safe by using the *Markup* class or by using the `|safe` filter in the template. Head over to the Jinja 2 documentation for more examples.

Here is a basic introduction to how the *Markup* class works:

```
>>> from markupsafe import Markup
>>> Markup('<strong>Hello %s!</strong>') % '<blink>hacker</blink>'
Markup('<strong>Hello &lt;blink&gt;hacker&lt;/blink&gt;!</strong>')
>>> Markup.escape('<blink>hacker</blink>')
Markup('&lt;blink&gt;hacker&lt;/blink&gt;')
>>> Markup('<em>Marked up</em> &raquo; HTML').striptags()
'Marked up \xbbb HTML'
```

Changed in version 0.5: Autoescaping is no longer enabled for all templates. The following extensions for templates trigger autoescaping: `.html`, `.htm`, `.xml`, `.xhtml`. Templates loaded from a string will have autoescaping disabled.

1.4.8 Accessing Request Data

For web applications it's crucial to react to the data a client sends to the server. In Flask this information is provided by the global `request` object. If you have some experience with Python you might be wondering how that object can be global and how Flask manages to still be threadsafe. The answer is context locals:

Context Locals

Insider Information

If you want to understand how that works and how you can implement tests with context locals, read this section, otherwise just skip it.

Certain objects in Flask are global objects, but not of the usual kind. These objects are actually proxies to objects that are local to a specific context. What a mouthful. But that is actually quite easy to understand.

Imagine the context being the handling thread. A request comes in and the web server decides to spawn a new thread (or something else, the underlying object is capable of dealing with concurrency systems other than threads). When Flask starts its internal request handling it figures out that the current thread is the active context and binds the current application and the WSGI environments to that context (thread). It does that in an intelligent way so that one application can invoke another application without breaking.

¹ Unsure what that `g` object is? It's something in which you can store information for your own needs. See the documentation for `flask.g` and *Using SQLite 3 with Flask*.

So what does this mean to you? Basically you can completely ignore that this is the case unless you are doing something like unit testing. You will notice that code which depends on a request object will suddenly break because there is no request object. The solution is creating a request object yourself and binding it to the context. The easiest solution for unit testing is to use the `test_request_context()` context manager. In combination with the `with` statement it will bind a test request so that you can interact with it. Here is an example:

```
from flask import request

with app.test_request_context('/hello', method='POST'):
    # now you can do something with the request until the
    # end of the with block, such as basic assertions:
    assert request.path == '/hello'
    assert request.method == 'POST'
```

The other possibility is passing a whole WSGI environment to the `request_context()` method:

```
with app.request_context(environ):
    assert request.method == 'POST'
```

The Request Object

The request object is documented in the API section and we will not cover it here in detail (see [Request](#)). Here is a broad overview of some of the most common operations. First of all you have to import it from the `flask` module:

```
from flask import request
```

The current request method is available by using the `method` attribute. To access form data (data transmitted in a POST or PUT request) you can use the `form` attribute. Here is a full example of the two attributes mentioned above:

```
@app.route('/login', methods=['POST', 'GET'])
def login():
    error = None
    if request.method == 'POST':
        if valid_login(request.form['username'],
                       request.form['password']):
            return log_the_user_in(request.form['username'])
        else:
            error = 'Invalid username/password'
    # the code below is executed if the request method
    # was GET or the credentials were invalid
    return render_template('login.html', error=error)
```

What happens if the key does not exist in the `form` attribute? In that case a special `KeyError` is raised. You can catch it like a standard `KeyError` but if you don't do that, a HTTP 400 Bad Request error page is shown instead. So for many situations you don't have to deal with that problem.

To access parameters submitted in the URL (`?key=value`) you can use the `args` attribute:

```
searchword = request.args.get('key', '')
```

We recommend accessing URL parameters with `get` or by catching the `KeyError` because users might change the URL and presenting them a 400 bad request page in that case is not user friendly.

For a full list of methods and attributes of the request object, head over to the [Request](#) documentation.

File Uploads

You can handle uploaded files with Flask easily. Just make sure not to forget to set the `enctype="multipart/form-data"` attribute on your HTML form, otherwise the browser will not transmit your files at all.

Uploaded files are stored in memory or at a temporary location on the filesystem. You can access those files by looking at the `files` attribute on the request object. Each uploaded file is stored in that dictionary. It behaves just like a standard Python `file` object, but it also has a `save()` method that allows you to store that file on the filesystem of the server. Here is a simple example showing how that works:

```
from flask import request

@app.route('/upload', methods=['GET', 'POST'])
def upload_file():
    if request.method == 'POST':
        f = request.files['the_file']
        f.save('/var/www/uploads/uploaded_file.txt')
    ...
```

If you want to know how the file was named on the client before it was uploaded to your application, you can access the `filename` attribute. However please keep in mind that this value can be forged so never ever trust that value. If you want to use the filename of the client to store the file on the server, pass it through the `secure_filename()` function that Werkzeug provides for you:

```
from werkzeug.utils import secure_filename

@app.route('/upload', methods=['GET', 'POST'])
def upload_file():
    if request.method == 'POST':
        file = request.files['the_file']
        file.save(f"/var/www/uploads/{secure_filename(file.filename)}")
    ...
```

For some better examples, see *Uploading Files*.

Cookies

To access cookies you can use the `cookies` attribute. To set cookies you can use the `set_cookie` method of response objects. The `cookies` attribute of request objects is a dictionary with all the cookies the client transmits. If you want to use sessions, do not use the cookies directly but instead use the `Sessions` in Flask that add some security on top of cookies for you.

Reading cookies:

```
from flask import request

@app.route('/')
def index():
    username = request.cookies.get('username')
    # use cookies.get(key) instead of cookies[key] to not get a
    # KeyError if the cookie is missing.
```

Storing cookies:

```
from flask import make_response

@app.route('/')
def index():
```

(continues on next page)

```
resp = make_response(render_template(...))
resp.set_cookie('username', 'the username')
return resp
```

Note that cookies are set on response objects. Since you normally just return strings from the view functions Flask will convert them into response objects for you. If you explicitly want to do that you can use the `make_response()` function and then modify it.

Sometimes you might want to set a cookie at a point where the response object does not exist yet. This is possible by utilizing the *Deferred Request Callbacks* pattern.

For this also see *About Responses*.

1.4.9 Redirects and Errors

To redirect a user to another endpoint, use the `redirect()` function; to abort a request early with an error code, use the `abort()` function:

```
from flask import abort, redirect, url_for

@app.route('/')
def index():
    return redirect(url_for('login'))

@app.route('/login')
def login():
    abort(401)
    this_is_never_executed()
```

This is a rather pointless example because a user will be redirected from the index to a page they cannot access (401 means access denied) but it shows how that works.

By default a black and white error page is shown for each error code. If you want to customize the error page, you can use the `errorhandler()` decorator:

```
from flask import render_template

@app.errorhandler(404)
def page_not_found(error):
    return render_template('page_not_found.html'), 404
```

Note the `404` after the `render_template()` call. This tells Flask that the status code of that page should be 404 which means not found. By default 200 is assumed which translates to: all went well.

See *Handling Application Errors* for more details.

1.4.10 About Responses

The return value from a view function is automatically converted into a response object for you. If the return value is a string it's converted into a response object with the string as response body, a `200` OK status code and a `text/html` mimetype. If the return value is a dict, `jsonify()` is called to produce a response. The logic that Flask applies to converting return values into response objects is as follows:

1. If a response object of the correct type is returned it's directly returned from the view.
2. If it's a string, a response object is created with that data and the default parameters.
3. If it's a dict, a response object is created using `jsonify`.

- If a tuple is returned the items in the tuple can provide extra information. Such tuples have to be in the form (response, status), (response, headers), or (response, status, headers). The status value will override the status code and headers can be a list or dictionary of additional header values.
- If none of that works, Flask will assume the return value is a valid WSGI application and convert that into a response object.

If you want to get hold of the resulting response object inside the view you can use the `make_response()` function.

Imagine you have a view like this:

```
from flask import render_template

@app.errorhandler(404)
def not_found(error):
    return render_template('error.html'), 404
```

You just need to wrap the return expression with `make_response()` and get the response object to modify it, then return it:

```
from flask import make_response

@app.errorhandler(404)
def not_found(error):
    resp = make_response(render_template('error.html'), 404)
    resp.headers['X-Something'] = 'A value'
    return resp
```

APIs with JSON

A common response format when writing an API is JSON. It's easy to get started writing such an API with Flask. If you return a dict from a view, it will be converted to a JSON response.

```
@app.route("/me")
def me_api():
    user = get_current_user()
    return {
        "username": user.username,
        "theme": user.theme,
        "image": url_for("user_image", filename=user.image),
    }
```

Depending on your API design, you may want to create JSON responses for types other than dict. In that case, use the `jsonify()` function, which will serialize any supported JSON data type. Or look into Flask community extensions that support more complex applications.

```
from flask import jsonify

@app.route("/users")
def users_api():
    users = get_all_users()
    return jsonify([user.to_json() for user in users])
```

1.4.11 Sessions

In addition to the request object there is also a second object called `session` which allows you to store information specific to a user from one request to the next. This is implemented on top of cookies for you and signs the cookies cryptographically. What this means is that the user could look at the contents of your cookie but not modify it, unless they know the secret key used for signing.

In order to use sessions you have to set a secret key. Here is how sessions work:

```
from flask import session

# Set the secret key to some random bytes. Keep this really secret!
app.secret_key = b'_5#y2L"F4Q8z\n\xec]/'

@app.route('/')
def index():
    if 'username' in session:
        return f'Logged in as {session["username"]}'
    return 'You are not logged in'

@app.route('/login', methods=['GET', 'POST'])
def login():
    if request.method == 'POST':
        session['username'] = request.form['username']
        return redirect(url_for('index'))
    return '''
    <form method="post">
        <p><input type="text" name="username">
        <p><input type="submit" value="Login">
    </form>
    '''

@app.route('/logout')
def logout():
    # remove the username from the session if it's there
    session.pop('username', None)
    return redirect(url_for('index'))
```

How to generate good secret keys

A secret key should be as random as possible. Your operating system has ways to generate pretty random data based on a cryptographic random generator. Use the following command to quickly generate a value for Flask. `secret_key` (or `SECRET_KEY`):

```
$ python -c 'import os; print(os.urandom(16))'
b'_5#y2L"F4Q8z\n\xec]/'
```

A note on cookie-based sessions: Flask will take the values you put into the session object and serialize them into a cookie. If you are finding some values do not persist across requests, cookies are indeed enabled, and you are not getting a clear error message, check the size of the cookie in your page responses compared to the size supported by web browsers.

Besides the default client-side based sessions, if you want to handle sessions on the server-side instead, there are several Flask extensions that support this.

1.4.12 Message Flashing

Good applications and user interfaces are all about feedback. If the user does not get enough feedback they will probably end up hating the application. Flask provides a really simple way to give feedback to a user with the flashing system. The flashing system basically makes it possible to record a message at the end of a request and access it on the next (and only the next) request. This is usually combined with a layout template to expose the message.

To flash a message use the `flash()` method, to get hold of the messages you can use `get_flashed_messages()` which is also available in the templates. See [Message Flashing](#) for a full example.

1.4.13 Logging

New in version 0.3.

Sometimes you might be in a situation where you deal with data that should be correct, but actually is not. For example you may have some client-side code that sends an HTTP request to the server but it's obviously malformed. This might be caused by a user tampering with the data, or the client code failing. Most of the time it's okay to reply with `400 Bad Request` in that situation, but sometimes that won't do and the code has to continue working.

You may still want to log that something fishy happened. This is where loggers come in handy. As of Flask 0.3 a logger is preconfigured for you to use.

Here are some example log calls:

```
app.logger.debug('A value for debugging')
app.logger.warning('A warning occurred (%d apples)', 42)
app.logger.error('An error occurred')
```

The attached `logger` is a standard logging `Logger`, so head over to the official [logging](#) docs for more information. See [Handling Application Errors](#).

1.4.14 Hooking in WSGI Middleware

To add WSGI middleware to your Flask application, wrap the application's `wsgi_app` attribute. For example, to apply Werkzeug's `ProxyFix` middleware for running behind Nginx:

```
from werkzeug.middleware.proxy_fix import ProxyFix
app.wsgi_app = ProxyFix(app.wsgi_app)
```

Wrapping `app.wsgi_app` instead of `app` means that `app` still points at your Flask application, not at the middleware, so you can continue to use and configure `app` directly.

1.4.15 Using Flask Extensions

Extensions are packages that help you accomplish common tasks. For example, Flask-SQLAlchemy provides SQLAlchemy support that makes it simple and easy to use with Flask.

For more on Flask extensions, see [Extensions](#).

1.4.16 Deploying to a Web Server

Ready to deploy your new Flask app? See *Deployment Options*.

1.5 Tutorial

1.5.1 Project Layout

Create a project directory and enter it:

```
$ mkdir flask-tutorial
$ cd flask-tutorial
```

Then follow the *installation instructions* to set up a Python virtual environment and install Flask for your project. The tutorial will assume you're working from the `flask-tutorial` directory from now on. The file names at the top of each code block are relative to this directory.

A Flask application can be as simple as a single file.

Listing 1: `hello.py`

```
from flask import Flask

app = Flask(__name__)

@app.route('/')
def hello():
    return 'Hello, World!'
```

However, as a project gets bigger, it becomes overwhelming to keep all the code in one file. Python projects use *packages* to organize code into multiple modules that can be imported where needed, and the tutorial will do this as well.

The project directory will contain:


- `flaskr/`, a Python package containing your application code and files.
- `tests/`, a directory containing test modules.
- `venv/`, a Python virtual environment where Flask and other dependencies are installed.
- Installation files telling Python how to install your project.
- Version control config, such as `git`. You should make a habit of using some type of version control for all your projects, no matter the size.
- Any other project files you might add in the future.

By the end, your project layout will look like this:

```
/home/user/Projects/flask-tutorial
├── flaskr/
│   ├── __init__.py
│   ├── db.py
│   ├── schema.sql
│   ├── auth.py
│   └── blog.py
```

(continues on next page)

(continued from previous page)

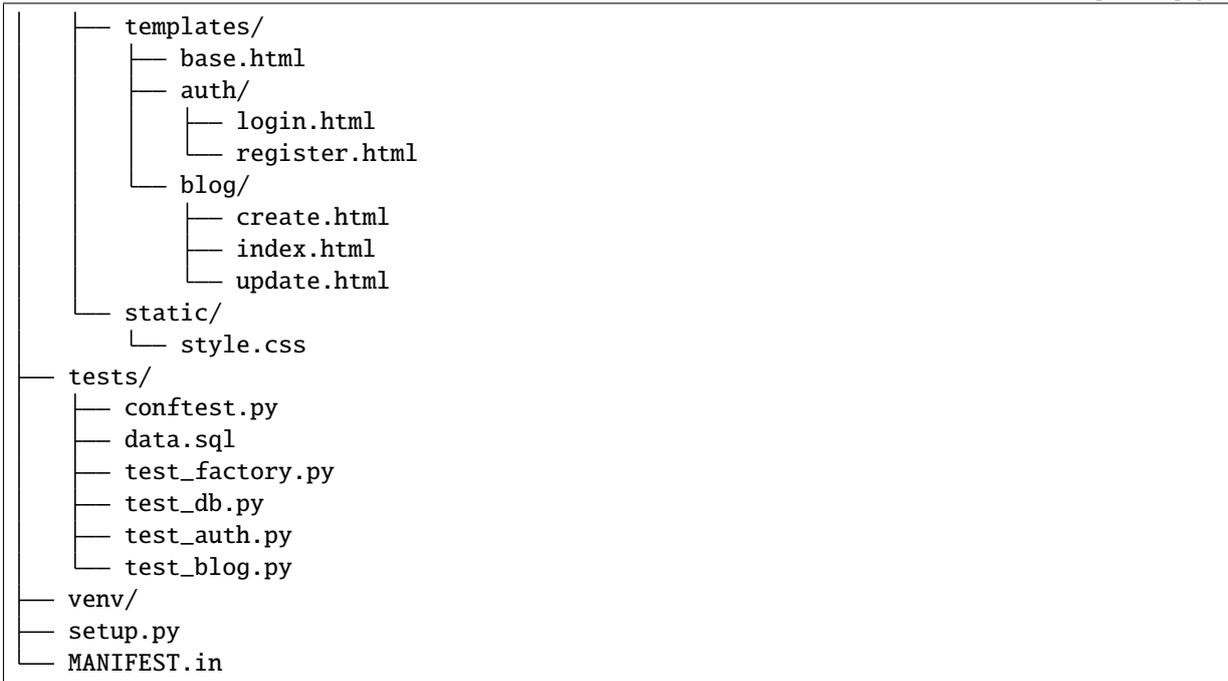

If you're using version control, the following files that are generated while running your project should be ignored. There may be other files based on the editor you use. In general, ignore files that you didn't write. For example, with git:

Listing 2: .gitignore

```
venv/

*.pyc
__pycache__/

instance/

.pytest_cache/
.coverage
htmlcov/

dist/
build/
*.egg-info/
```

Continue to [Application Setup](#).

1.5.2 Application Setup

A Flask application is an instance of the *Flask* class. Everything about the application, such as configuration and URLs, will be registered with this class.

The most straightforward way to create a Flask application is to create a global *Flask* instance directly at the top of your code, like how the “Hello, World!” example did on the previous page. While this is simple and useful in some cases, it can cause some tricky issues as the project grows.

Instead of creating a *Flask* instance globally, you will create it inside a function. This function is known as the *application factory*. Any configuration, registration, and other setup the application needs will happen inside the function, then the application will be returned.

The Application Factory

It's time to start coding! Create the `flaskr` directory and add the `__init__.py` file. The `__init__.py` serves double duty: it will contain the application factory, and it tells Python that the `flaskr` directory should be treated as a package.

```
$ mkdir flaskr
```

Listing 3: `flaskr/__init__.py`

```
import os

from flask import Flask

def create_app(test_config=None):
    # create and configure the app
    app = Flask(__name__, instance_relative_config=True)
    app.config.from_mapping(
        SECRET_KEY='dev',
        DATABASE=os.path.join(app.instance_path, 'flaskr.sqlite'),
    )

    if test_config is None:
        # load the instance config, if it exists, when not testing
        app.config.from_pyfile('config.py', silent=True)
    else:
        # load the test config if passed in
        app.config.from_mapping(test_config)

    # ensure the instance folder exists
    try:
        os.makedirs(app.instance_path)
    except OSError:
        pass

    # a simple page that says hello
    @app.route('/hello')
    def hello():
        return 'Hello, World!'

    return app
```

`create_app` is the application factory function. You'll add to it later in the tutorial, but it already does a lot.

1. `app = Flask(__name__, instance_relative_config=True)` creates the *Flask* instance.
 - `__name__` is the name of the current Python module. The app needs to know where it's located to set up some paths, and `__name__` is a convenient way to tell it that.
 - `instance_relative_config=True` tells the app that configuration files are relative to the *instance folder*. The instance folder is located outside the `flaskr` package and can hold local data that shouldn't be committed to version control, such as configuration secrets and the database file.
2. `app.config.from_mapping()` sets some default configuration that the app will use:
 - `SECRET_KEY` is used by Flask and extensions to keep data safe. It's set to `'dev'` to provide a convenient value during development, but it should be overridden with a random value when deploying.
 - `DATABASE` is the path where the SQLite database file will be saved. It's under `app.instance_path`, which is the path that Flask has chosen for the instance folder. You'll learn more about the database in

the next section.

3. `app.config.from_pyfile()` overrides the default configuration with values taken from the `config.py` file in the instance folder if it exists. For example, when deploying, this can be used to set a real `SECRET_KEY`.
 - `test_config` can also be passed to the factory, and will be used instead of the instance configuration. This is so the tests you'll write later in the tutorial can be configured independently of any development values you have configured.
4. `os.makedirs()` ensures that `app.instance_path` exists. Flask doesn't create the instance folder automatically, but it needs to be created because your project will create the SQLite database file there.
5. `@app.route()` creates a simple route so you can see the application working before getting into the rest of the tutorial. It creates a connection between the URL `/hello` and a function that returns a response, the string `'Hello, World!'` in this case.

Run The Application

Now you can run your application using the `flask` command. From the terminal, tell Flask where to find your application, then run it in development mode. Remember, you should still be in the top-level `flask-tutorial` directory, not the `flaskr` package.

Development mode shows an interactive debugger whenever a page raises an exception, and restarts the server whenever you make changes to the code. You can leave it running and just reload the browser page as you follow the tutorial.

Bash

CMD

Powershell

```
$ export FLASK_APP=flaskr
$ export FLASK_ENV=development
$ flask run
```

```
> set FLASK_APP=flaskr
> set FLASK_ENV=development
> flask run
```

```
> $env:FLASK_APP = "flaskr"
> $env:FLASK_ENV = "development"
> flask run
```

You'll see output similar to this:

```
* Serving Flask app "flaskr"
* Environment: development
* Debug mode: on
* Running on http://127.0.0.1:5000/ (Press CTRL+C to quit)
* Restarting with stat
* Debugger is active!
* Debugger PIN: 855-212-761
```

Visit <http://127.0.0.1:5000/hello> in a browser and you should see the “Hello, World!” message. Congratulations, you're now running your Flask web application!

Continue to *Define and Access the Database*.

1.5.3 Define and Access the Database

The application will use a [SQLite](#) database to store users and posts. Python comes with built-in support for SQLite in the `sqlite3` module.

SQLite is convenient because it doesn't require setting up a separate database server and is built-in to Python. However, if concurrent requests try to write to the database at the same time, they will slow down as each write happens sequentially. Small applications won't notice this. Once you become big, you may want to switch to a different database.

The tutorial doesn't go into detail about SQL. If you are not familiar with it, the SQLite docs describe the [language](#).

Connect to the Database

The first thing to do when working with a SQLite database (and most other Python database libraries) is to create a connection to it. Any queries and operations are performed using the connection, which is closed after the work is finished.

In web applications this connection is typically tied to the request. It is created at some point when handling a request, and closed before the response is sent.

Listing 4: flaskr/db.py

```
import sqlite3

import click
from flask import current_app, g
from flask.cli import with_appcontext

def get_db():
    if 'db' not in g:
        g.db = sqlite3.connect(
            current_app.config['DATABASE'],
            detect_types=sqlite3.PARSE_DECLTYPES
        )
        g.db.row_factory = sqlite3.Row

    return g.db

def close_db(e=None):
    db = g.pop('db', None)

    if db is not None:
        db.close()
```

`g` is a special object that is unique for each request. It is used to store data that might be accessed by multiple functions during the request. The connection is stored and reused instead of creating a new connection if `get_db` is called a second time in the same request.

`current_app` is another special object that points to the Flask application handling the request. Since you used an application factory, there is no application object when writing the rest of your code. `get_db` will be called when the application has been created and is handling a request, so `current_app` can be used.

`sqlite3.connect()` establishes a connection to the file pointed at by the `DATABASE` configuration key. This file doesn't have to exist yet, and won't until you initialize the database later.

`sqlite3.Row` tells the connection to return rows that behave like dicts. This allows accessing the columns by name.

`close_db` checks if a connection was created by checking if `g.db` was set. If the connection exists, it is closed. Further down you will tell your application about the `close_db` function in the application factory so that it is called after each request.

Create the Tables

In SQLite, data is stored in *tables* and *columns*. These need to be created before you can store and retrieve data. Flaskr will store users in the `user` table, and posts in the `post` table. Create a file with the SQL commands needed to create empty tables:

Listing 5: `flaskr/schema.sql`

```
DROP TABLE IF EXISTS user;
DROP TABLE IF EXISTS post;

CREATE TABLE user (
  id INTEGER PRIMARY KEY AUTOINCREMENT,
  username TEXT UNIQUE NOT NULL,
  password TEXT NOT NULL
);

CREATE TABLE post (
  id INTEGER PRIMARY KEY AUTOINCREMENT,
  author_id INTEGER NOT NULL,
  created TIMESTAMP NOT NULL DEFAULT CURRENT_TIMESTAMP,
  title TEXT NOT NULL,
  body TEXT NOT NULL,
  FOREIGN KEY (author_id) REFERENCES user (id)
);
```

Add the Python functions that will run these SQL commands to the `db.py` file:

Listing 6: `flaskr/db.py`

```
def init_db():
    db = get_db()

    with current_app.open_resource('schema.sql') as f:
        db.executescript(f.read().decode('utf8'))

@click.command('init-db')
@with_appcontext
def init_db_command():
    """Clear the existing data and create new tables."""
    init_db()
    click.echo('Initialized the database.')
```

`open_resource()` opens a file relative to the `flaskr` package, which is useful since you won't necessarily know where that location is when deploying the application later. `get_db` returns a database connection, which is used to execute the commands read from the file.

`click.command()` defines a command line command called `init-db` that calls the `init_db` function and shows a success message to the user. You can read *Command Line Interface* to learn more about writing commands.

Register with the Application

The `close_db` and `init_db_command` functions need to be registered with the application instance; otherwise, they won't be used by the application. However, since you're using a factory function, that instance isn't available when writing the functions. Instead, write a function that takes an application and does the registration.

Listing 7: flaskr/db.py

```
def init_app(app):
    app.teardown_appcontext(close_db)
    app.cli.add_command(init_db_command)
```

`app.teardown_appcontext()` tells Flask to call that function when cleaning up after returning the response.

`app.cli.add_command()` adds a new command that can be called with the `flask` command.

Import and call this function from the factory. Place the new code at the end of the factory function before returning the app.

Listing 8: flaskr/__init__.py

```
def create_app():
    app = ...
    # existing code omitted

    from . import db
    db.init_app(app)

    return app
```

Initialize the Database File

Now that `init-db` has been registered with the app, it can be called using the `flask` command, similar to the `run` command from the previous page.

Note: If you're still running the server from the previous page, you can either stop the server, or run this command in a new terminal. If you use a new terminal, remember to change to your project directory and activate the env as described in *Installation*. You'll also need to set `FLASK_APP` and `FLASK_ENV` as shown on the previous page.

Run the `init-db` command:

```
$ flask init-db
Initialized the database.
```

There will now be a `flaskr.sqlite` file in the instance folder in your project.

Continue to *Blueprints and Views*.

1.5.4 Blueprints and Views

A view function is the code you write to respond to requests to your application. Flask uses patterns to match the incoming request URL to the view that should handle it. The view returns data that Flask turns into an outgoing response. Flask can also go the other direction and generate a URL to a view based on its name and arguments.

Create a Blueprint

A *Blueprint* is a way to organize a group of related views and other code. Rather than registering views and other code directly with an application, they are registered with a blueprint. Then the blueprint is registered with the application when it is available in the factory function.

Flaskr will have two blueprints, one for authentication functions and one for the blog posts functions. The code for each blueprint will go in a separate module. Since the blog needs to know about authentication, you'll write the authentication one first.

Listing 9: flaskr/auth.py

```
import functools

from flask import (
    Blueprint, flash, g, redirect, render_template, request, session, url_for
)
from werkzeug.security import check_password_hash, generate_password_hash

from flaskr.db import get_db

bp = Blueprint('auth', __name__, url_prefix='/auth')
```

This creates a *Blueprint* named 'auth'. Like the application object, the blueprint needs to know where it's defined, so `__name__` is passed as the second argument. The `url_prefix` will be prepended to all the URLs associated with the blueprint.

Import and register the blueprint from the factory using `app.register_blueprint()`. Place the new code at the end of the factory function before returning the app.

Listing 10: flaskr/___init___py

```
def create_app():
    app = ...
    # existing code omitted

    from . import auth
    app.register_blueprint(auth.bp)

    return app
```

The authentication blueprint will have views to register new users and to log in and log out.

The First View: Register

When the user visits the `/auth/register` URL, the `register` view will return `HTML` with a form for them to fill out. When they submit the form, it will validate their input and either show the form again with an error message or create the new user and go to the login page.

For now you will just write the view code. On the next page, you'll write templates to generate the HTML form.

Listing 11: flaskr/auth.py

```
@bp.route('/register', methods=('GET', 'POST'))
def register():
    if request.method == 'POST':
        username = request.form['username']
        password = request.form['password']
        db = get_db()
        error = None

        if not username:
            error = 'Username is required.'
        elif not password:
            error = 'Password is required.'

        if error is None:
            try:
                db.execute(
                    "INSERT INTO user (username, password) VALUES (?, ?)",
                    (username, generate_password_hash(password)),
                )
                db.commit()
            except db.IntegrityError:
                error = f"User {username} is already registered."
            else:
                return redirect(url_for("auth.login"))

        flash(error)

    return render_template('auth/register.html')
```

Here's what the `register` view function is doing:

1. `@bp.route` associates the URL `/register` with the `register` view function. When Flask receives a request to `/auth/register`, it will call the `register` view and use the return value as the response.
2. If the user submitted the form, `request.method` will be `'POST'`. In this case, start validating the input.

3. `request.form` is a special type of `dict` mapping submitted form keys and values. The user will input their username and password.
4. Validate that username and password are not empty.
5. If validation succeeds, insert the new user data into the database.
 - `db.execute` takes a SQL query with `?` placeholders for any user input, and a tuple of values to replace the placeholders with. The database library will take care of escaping the values so you are not vulnerable to a *SQL injection attack*.
 - For security, passwords should never be stored in the database directly. Instead, `generate_password_hash()` is used to securely hash the password, and that hash is stored. Since this query modifies data, `db.commit()` needs to be called afterwards to save the changes.
 - An `sqlite3.IntegrityError` will occur if the username already exists, which should be shown to the user as another validation error.
6. After storing the user, they are redirected to the login page. `url_for()` generates the URL for the login view based on its name. This is preferable to writing the URL directly as it allows you to change the URL later without changing all code that links to it. `redirect()` generates a redirect response to the generated URL.
7. If validation fails, the error is shown to the user. `flash()` stores messages that can be retrieved when rendering the template.
8. When the user initially navigates to `auth/register`, or there was a validation error, an HTML page with the registration form should be shown. `render_template()` will render a template containing the HTML, which you'll write in the next step of the tutorial.

Login

This view follows the same pattern as the `register` view above.

Listing 12: `flaskr/auth.py`

```
@bp.route('/login', methods=('GET', 'POST'))
def login():
    if request.method == 'POST':
        username = request.form['username']
        password = request.form['password']
        db = get_db()
        error = None
        user = db.execute(
            'SELECT * FROM user WHERE username = ?', (username,)
        ).fetchone()

        if user is None:
            error = 'Incorrect username.'
        elif not check_password_hash(user['password'], password):
            error = 'Incorrect password.'

        if error is None:
            session.clear()
            session['user_id'] = user['id']
            return redirect(url_for('index'))

    flash(error)

    return render_template('auth/login.html')
```

There are a few differences from the `register` view:

1. The user is queried first and stored in a variable for later use.
`fetchone()` returns one row from the query. If the query returned no results, it returns `None`. Later, `fetchall()` will be used, which returns a list of all results.
2. `check_password_hash()` hashes the submitted password in the same way as the stored hash and securely compares them. If they match, the password is valid.
3. `session` is a `dict` that stores data across requests. When validation succeeds, the user's `id` is stored in a new session. The data is stored in a `cookie` that is sent to the browser, and the browser then sends it back with subsequent requests. Flask securely *signs* the data so that it can't be tampered with.

Now that the user's `id` is stored in the `session`, it will be available on subsequent requests. At the beginning of each request, if a user is logged in their information should be loaded and made available to other views.

Listing 13: flaskr/auth.py

```
@bp.before_app_request
def load_logged_in_user():
    user_id = session.get('user_id')

    if user_id is None:
        g.user = None
    else:
        g.user = get_db().execute(
            'SELECT * FROM user WHERE id = ?', (user_id,)
        ).fetchone()
```

`bp.before_app_request()` registers a function that runs before the view function, no matter what URL is requested. `load_logged_in_user` checks if a user `id` is stored in the `session` and gets that user's data from the database, storing it on `g.user`, which lasts for the length of the request. If there is no user `id`, or if the `id` doesn't exist, `g.user` will be `None`.

Logout

To log out, you need to remove the user `id` from the `session`. Then `load_logged_in_user` won't load a user on subsequent requests.

Listing 14: flaskr/auth.py

```
@bp.route('/logout')
def logout():
    session.clear()
    return redirect(url_for('index'))
```

Require Authentication in Other Views

Creating, editing, and deleting blog posts will require a user to be logged in. A *decorator* can be used to check this for each view it's applied to.

Listing 15: flaskr/auth.py

```
def login_required(view):
    @functools.wraps(view)
    def wrapped_view(**kwargs):
        if g.user is None:
            return redirect(url_for('auth.login'))

        return view(**kwargs)
```

(continues on next page)

(continued from previous page)

```
return wrapped_view
```

This decorator returns a new view function that wraps the original view it's applied to. The new function checks if a user is loaded and redirects to the login page otherwise. If a user is loaded the original view is called and continues normally. You'll use this decorator when writing the blog views.

Endpoints and URLs

The `url_for()` function generates the URL to a view based on a name and arguments. The name associated with a view is also called the *endpoint*, and by default it's the same as the name of the view function.

For example, the `hello()` view that was added to the app factory earlier in the tutorial has the name 'hello' and can be linked to with `url_for('hello')`. If it took an argument, which you'll see later, it would be linked to using `url_for('hello', who='World')`.

When using a blueprint, the name of the blueprint is prepended to the name of the function, so the endpoint for the login function you wrote above is 'auth.login' because you added it to the 'auth' blueprint.

Continue to [Templates](#).

1.5.5 Templates

You've written the authentication views for your application, but if you're running the server and try to go to any of the URLs, you'll see a `TemplateNotFound` error. That's because the views are calling `render_template()`, but you haven't written the templates yet. The template files will be stored in the `templates` directory inside the `flaskr` package.

Templates are files that contain static data as well as placeholders for dynamic data. A template is rendered with specific data to produce a final document. Flask uses the [Jinja](#) template library to render templates.

In your application, you will use templates to render [HTML](#) which will display in the user's browser. In Flask, Jinja is configured to *autoescape* any data that is rendered in HTML templates. This means that it's safe to render user input; any characters they've entered that could mess with the HTML, such as `<` and `>` will be *escaped* with *safe* values that look the same in the browser but don't cause unwanted effects.

Jinja looks and behaves mostly like Python. Special delimiters are used to distinguish Jinja syntax from the static data in the template. Anything between `{{` and `}}` is an expression that will be output to the final document. `{%` and `%}` denotes a control flow statement like `if` and `for`. Unlike Python, blocks are denoted by start and end tags rather than indentation since static text within a block could change indentation.

The Base Layout

Each page in the application will have the same basic layout around a different body. Instead of writing the entire HTML structure in each template, each template will *extend* a base template and override specific sections.

Listing 16: `flaskr/templates/base.html`

```
<!doctype html>
<title>{% block title %}{% endblock %} - Flaskr</title>
<link rel="stylesheet" href="{{ url_for('static', filename='style.css') }}">
<nav>
  <h1>Flaskr</h1>
  <ul>
    {% if g.user %}
      <li><span>{{ g.user['username'] }}</span>
      <li><a href="{{ url_for('auth.logout') }}">Log Out</a>
```

(continues on next page)

```

    {% else %}
    <li><a href="{{ url_for('auth.register') }}">Register</a>
    <li><a href="{{ url_for('auth.login') }}">Log In</a>
    {% endif %}
</ul>
</nav>
<section class="content">
  <header>
    {% block header %}{% endblock %}
  </header>
  {% for message in get_flashed_messages() %}
    <div class="flash">{{ message }}</div>
  {% endfor %}
  {% block content %}{% endblock %}
</section>

```

`g` is automatically available in templates. Based on if `g.user` is set (from `load_logged_in_user`), either the username and a log out link are displayed, or links to register and log in are displayed. `url_for()` is also automatically available, and is used to generate URLs to views instead of writing them out manually.

After the page title, and before the content, the template loops over each message returned by `get_flashed_messages()`. You used `flash()` in the views to show error messages, and this is the code that will display them.

There are three blocks defined here that will be overridden in the other templates:

1. `{% block title %}` will change the title displayed in the browser's tab and window title.
2. `{% block header %}` is similar to `title` but will change the title displayed on the page.
3. `{% block content %}` is where the content of each page goes, such as the login form or a blog post.

The base template is directly in the `templates` directory. To keep the others organized, the templates for a blueprint will be placed in a directory with the same name as the blueprint.

Register

Listing 17: `flaskr/templates/auth/register.html`

```

{% extends 'base.html' %}

{% block header %}
  <h1>{% block title %}Register{% endblock %}</h1>
{% endblock %}

{% block content %}
  <form method="post">
    <label for="username">Username</label>
    <input name="username" id="username" required>
    <label for="password">Password</label>
    <input type="password" name="password" id="password" required>
    <input type="submit" value="Register">
  </form>
{% endblock %}

```

`{% extends 'base.html' %}` tells Jinja that this template should replace the blocks from the base template. All the rendered content must appear inside `{% block %}` tags that override blocks from the base template.

A useful pattern used here is to place `{% block title %}` inside `{% block header %}`. This will set the title block and then output the value of it into the header block, so that both the window and page share the same title

without writing it twice.

The `input` tags are using the `required` attribute here. This tells the browser not to submit the form until those fields are filled in. If the user is using an older browser that doesn't support that attribute, or if they are using something besides a browser to make requests, you still want to validate the data in the Flask view. It's important to always fully validate the data on the server, even if the client does some validation as well.

Log In

This is identical to the register template except for the title and submit button.

Listing 18: flaskr/templates/auth/login.html

```
{% extends 'base.html' %}

{% block header %}
  <h1>{% block title %}Log In{% endblock %}</h1>
{% endblock %}

{% block content %}
  <form method="post">
    <label for="username">Username</label>
    <input name="username" id="username" required>
    <label for="password">Password</label>
    <input type="password" name="password" id="password" required>
    <input type="submit" value="Log In">
  </form>
{% endblock %}
```

Register A User

Now that the authentication templates are written, you can register a user. Make sure the server is still running (`flask run` if it's not), then go to <http://127.0.0.1:5000/auth/register>.

Try clicking the “Register” button without filling out the form and see that the browser shows an error message. Try removing the `required` attributes from the `register.html` template and click “Register” again. Instead of the browser showing an error, the page will reload and the error from `flash()` in the view will be shown.

Fill out a username and password and you'll be redirected to the login page. Try entering an incorrect username, or the correct username and incorrect password. If you log in you'll get an error because there's no `index` view to redirect to yet.

Continue to *Static Files*.

1.5.6 Static Files

The authentication views and templates work, but they look very plain right now. Some `CSS` can be added to add style to the HTML layout you constructed. The style won't change, so it's a *static* file rather than a template.

Flask automatically adds a `static` view that takes a path relative to the `flaskr/static` directory and serves it. The `base.html` template already has a link to the `style.css` file:

```
{{ url_for('static', filename='style.css') }}
```

Besides `CSS`, other types of static files might be files with JavaScript functions, or a logo image. They are all placed under the `flaskr/static` directory and referenced with `url_for('static', filename='...')`.

This tutorial isn't focused on how to write `CSS`, so you can just copy the following into the `flaskr/static/style.css` file:

Listing 19: flaskr/static/style.css

```

html { font-family: sans-serif; background: #eee; padding: 1rem; }
body { max-width: 960px; margin: 0 auto; background: white; }
h1 { font-family: serif; color: #377ba8; margin: 1rem 0; }
a { color: #377ba8; }
hr { border: none; border-top: 1px solid lightgray; }
nav { background: lightgray; display: flex; align-items: center; padding: 0 0.5rem; }
nav h1 { flex: auto; margin: 0; }
nav h1 a { text-decoration: none; padding: 0.25rem 0.5rem; }
nav ul { display: flex; list-style: none; margin: 0; padding: 0; }
nav ul li a, nav ul li span, header .action { display: block; padding: 0.5rem; }
.content { padding: 0 1rem 1rem; }
.content > header { border-bottom: 1px solid lightgray; display: flex; align-items: flex-end; }
.content > header h1 { flex: auto; margin: 1rem 0 0.25rem 0; }
.flash { margin: 1em 0; padding: 1em; background: #cae6f6; border: 1px solid #377ba8; }
.post > header { display: flex; align-items: flex-end; font-size: 0.85em; }
.post > header > div:first-of-type { flex: auto; }
.post > header h1 { font-size: 1.5em; margin-bottom: 0; }
.post .about { color: slategray; font-style: italic; }
.post .body { white-space: pre-line; }
.content:last-child { margin-bottom: 0; }
.content form { margin: 1em 0; display: flex; flex-direction: column; }
.content label { font-weight: bold; margin-bottom: 0.5em; }
.content input, .content textarea { margin-bottom: 1em; }
.content textarea { min-height: 12em; resize: vertical; }
input.danger { color: #cc2f2e; }
input[type=submit] { align-self: start; min-width: 10em; }

```

You can find a less compact version of `style.css` in the [example code](#).

Go to <http://127.0.0.1:5000/auth/login> and the page should look like the screenshot below.

You can read more about CSS from [Mozilla's documentation](#). If you change a static file, refresh the browser page.

If the change doesn't show up, try clearing your browser's cache.

Continue to *Blog Blueprint*.

1.5.7 Blog Blueprint

You'll use the same techniques you learned about when writing the authentication blueprint to write the blog blueprint. The blog should list all posts, allow logged in users to create posts, and allow the author of a post to edit or delete it.

As you implement each view, keep the development server running. As you save your changes, try going to the URL in your browser and testing them out.

The Blueprint

Define the blueprint and register it in the application factory.

Listing 20: flaskr/blog.py

```
from flask import (
    Blueprint, flash, g, redirect, render_template, request, url_for
)
from werkzeug.exceptions import abort

from flaskr.auth import login_required
from flaskr.db import get_db

bp = Blueprint('blog', __name__)
```

Import and register the blueprint from the factory using `app.register_blueprint()`. Place the new code at the end of the factory function before returning the app.

Listing 21: flaskr/__init__.py

```
def create_app():
    app = ...
    # existing code omitted

    from . import blog
    app.register_blueprint(blog.bp)
    app.add_url_rule('/', endpoint='index')

    return app
```

Unlike the auth blueprint, the blog blueprint does not have a `url_prefix`. So the `index` view will be at `/`, the `create` view at `/create`, and so on. The blog is the main feature of Flaskr, so it makes sense that the blog index will be the main index.

However, the endpoint for the `index` view defined below will be `blog.index`. Some of the authentication views referred to a plain `index` endpoint. `app.add_url_rule()` associates the endpoint name `'index'` with the `/` url so that `url_for('index')` or `url_for('blog.index')` will both work, generating the same `/` URL either way.

In another application you might give the blog blueprint a `url_prefix` and define a separate `index` view in the application factory, similar to the `hello` view. Then the `index` and `blog.index` endpoints and URLs would be different.

Index

The index will show all of the posts, most recent first. A JOIN is used so that the author information from the user table is available in the result.

Listing 22: flaskr/blog.py

```
@bp.route('/')
def index():
    db = get_db()
    posts = db.execute(
        'SELECT p.id, title, body, created, author_id, username'
        ' FROM post p JOIN user u ON p.author_id = u.id'
        ' ORDER BY created DESC'
    ).fetchall()
    return render_template('blog/index.html', posts=posts)
```

Listing 23: flaskr/templates/blog/index.html

```
{% extends 'base.html' %}

{% block header %}
<h1>{% block title %}Posts{% endblock %}</h1>
{% if g.user %}
  <a class="action" href="{{ url_for('blog.create') }}">New</a>
{% endif %}
{% endblock %}

{% block content %}
{% for post in posts %}
  <article class="post">
    <header>
      <div>
        <h1>{{ post['title'] }}</h1>
        <div class="about">by {{ post['username'] }} on {{ post['created'].strftime(
→ '%Y-%m-%d') }}</div>
      </div>
      {% if g.user['id'] == post['author_id'] %}
        <a class="action" href="{{ url_for('blog.update', id=post['id']) }}">Edit</
→ a>
      {% endif %}
    </header>
    <p class="body">{{ post['body'] }}</p>
  </article>
  {% if not loop.last %}
    <hr>
  {% endif %}
{% endfor %}
{% endblock %}
```

When a user is logged in, the header block adds a link to the create view. When the user is the author of a post, they'll see an "Edit" link to the update view for that post. `loop.last` is a special variable available inside Jinja for loops. It's used to display a line after each post except the last one, to visually separate them.

Create

The `create` view works the same as the `auth register` view. Either the form is displayed, or the posted data is validated and the post is added to the database or an error is shown.

The `login_required` decorator you wrote earlier is used on the blog views. A user must be logged in to visit these views, otherwise they will be redirected to the login page.

Listing 24: flaskr/blog.py

```
@bp.route('/create', methods=('GET', 'POST'))
@login_required
def create():
    if request.method == 'POST':
        title = request.form['title']
        body = request.form['body']
        error = None

        if not title:
            error = 'Title is required.'

        if error is not None:
            flash(error)
        else:
            db = get_db()
            db.execute(
                'INSERT INTO post (title, body, author_id)'
                ' VALUES (?, ?, ?)',
                (title, body, g.user['id'])
            )
            db.commit()
            return redirect(url_for('blog.index'))

    return render_template('blog/create.html')
```

Listing 25: flaskr/templates/blog/create.html

```
{% extends 'base.html' %}

{% block header %}
<h1>{% block title %}New Post{% endblock %}</h1>
{% endblock %}

{% block content %}
<form method="post">
  <label for="title">Title</label>
  <input name="title" id="title" value="{{ request.form['title'] }}" required>
  <label for="body">Body</label>
  <textarea name="body" id="body">{{ request.form['body'] }}</textarea>
  <input type="submit" value="Save">
</form>
{% endblock %}
```

Update

Both the update and delete views will need to fetch a post by id and check if the author matches the logged in user. To avoid duplicating code, you can write a function to get the post and call it from each view.

Listing 26: flaskr/blog.py

```
def get_post(id, check_author=True):
    post = get_db().execute(
        'SELECT p.id, title, body, created, author_id, username'
        ' FROM post p JOIN user u ON p.author_id = u.id'
        ' WHERE p.id = ?',
        (id,)
    ).fetchone()

    if post is None:
        abort(404, f"Post id {id} doesn't exist.")

    if check_author and post['author_id'] != g.user['id']:
        abort(403)

    return post
```

`abort()` will raise a special exception that returns an HTTP status code. It takes an optional message to show with the error, otherwise a default message is used. 404 means “Not Found”, and 403 means “Forbidden”. (401 means “Unauthorized”, but you redirect to the login page instead of returning that status.)

The `check_author` argument is defined so that the function can be used to get a post without checking the author. This would be useful if you wrote a view to show an individual post on a page, where the user doesn’t matter because they’re not modifying the post.

Listing 27: flaskr/blog.py

```
@bp.route('/<int:id>/update', methods=('GET', 'POST'))
@login_required
def update(id):
    post = get_post(id)

    if request.method == 'POST':
        title = request.form['title']
        body = request.form['body']
        error = None

        if not title:
            error = 'Title is required.'

        if error is not None:
            flash(error)
        else:
            db = get_db()
            db.execute(
                'UPDATE post SET title = ?, body = ?'
                ' WHERE id = ?',
                (title, body, id)
            )
            db.commit()
            return redirect(url_for('blog.index'))

    return render_template('blog/update.html', post=post)
```

Unlike the views you've written so far, the `update` function takes an argument, `id`. That corresponds to the `<int:id>` in the route. A real URL will look like `/1/update`. Flask will capture the `1`, ensure it's an `int`, and pass it as the `id` argument. If you don't specify `int:` and instead do `<id>`, it will be a string. To generate a URL to the update page, `url_for()` needs to be passed the `id` so it knows what to fill in: `url_for('blog.update', id=post['id'])`. This is also in the `index.html` file above.

The `create` and `update` views look very similar. The main difference is that the `update` view uses a `post` object and an `UPDATE` query instead of an `INSERT`. With some clever refactoring, you could use one view and template for both actions, but for the tutorial it's clearer to keep them separate.

Listing 28: flaskr/templates/blog/update.html

```
{% extends 'base.html' %}

{% block header %}
  <h1>{% block title %}Edit "{{ post['title'] }}"{% endblock %}</h1>
{% endblock %}

{% block content %}
  <form method="post">
    <label for="title">Title</label>
    <input name="title" id="title"
      value="{{ request.form['title'] or post['title'] }}" required>
    <label for="body">Body</label>
    <textarea name="body" id="body">{{ request.form['body'] or post['body'] }}</
→textarea>
    <input type="submit" value="Save">
  </form>
  <hr>
  <form action="{{ url_for('blog.delete', id=post['id']) }}" method="post">
    <input class="danger" type="submit" value="Delete" onclick="return confirm('Are
→you sure?');">
  </form>
{% endblock %}
```

This template has two forms. The first posts the edited data to the current page (`/<id>/update`). The other form contains only a button and specifies an `action` attribute that posts to the delete view instead. The button uses some JavaScript to show a confirmation dialog before submitting.

The pattern `{{ request.form['title'] or post['title'] }}` is used to choose what data appears in the form. When the form hasn't been submitted, the original `post` data appears, but if invalid form data was posted you want to display that so the user can fix the error, so `request.form` is used instead. `request` is another variable that's automatically available in templates.

Delete

The delete view doesn't have its own template, the delete button is part of `update.html` and posts to the `/<id>/delete` URL. Since there is no template, it will only handle the `POST` method and then redirect to the `index` view.

Listing 29: flaskr/blog.py

```
@bp.route('/<int:id>/delete', methods=('POST',))
@login_required
def delete(id):
    get_post(id)
    db = get_db()
    db.execute('DELETE FROM post WHERE id = ?', (id,))
```

(continues on next page)

```
db.commit()
return redirect(url_for('blog.index'))
```

Congratulations, you've now finished writing your application! Take some time to try out everything in the browser. However, there's still more to do before the project is complete.

Continue to *Make the Project Installable*.

1.5.8 Make the Project Installable

Making your project installable means that you can build a *distribution* file and install that in another environment, just like you installed Flask in your project's environment. This makes deploying your project the same as installing any other library, so you're using all the standard Python tools to manage everything.

Installing also comes with other benefits that might not be obvious from the tutorial or as a new Python user, including:

- Currently, Python and Flask understand how to use the `flaskr` package only because you're running from your project's directory. Installing means you can import it no matter where you run from.
- You can manage your project's dependencies just like other packages do, so `pip install yourproject.whl` installs them.
- Test tools can isolate your test environment from your development environment.

Note: This is being introduced late in the tutorial, but in your future projects you should always start with this.

Describe the Project

The `setup.py` file describes your project and the files that belong to it.

Listing 30: `setup.py`

```
from setuptools import find_packages, setup

setup(
    name='flaskr',
    version='1.0.0',
    packages=find_packages(),
    include_package_data=True,
    zip_safe=False,
    install_requires=[
        'flask',
    ],
)
```

`packages` tells Python what package directories (and the Python files they contain) to include. `find_packages()` finds these directories automatically so you don't have to type them out. To include other files, such as the static and templates directories, `include_package_data` is set. Python needs another file named `MANIFEST.in` to tell what this other data is.

Listing 31: `MANIFEST.in`

```
include flaskr/schema.sql
graft flaskr/static
graft flaskr/templates
global-exclude *.pyc
```

This tells Python to copy everything in the `static` and `templates` directories, and the `schema.sql` file, but to exclude all bytecode files.

See the [official packaging guide](#) for another explanation of the files and options used.

Install the Project

Use `pip` to install your project in the virtual environment.

```
$ pip install -e .
```

This tells `pip` to find `setup.py` in the current directory and install it in *editable* or *development* mode. Editable mode means that as you make changes to your local code, you'll only need to re-install if you change the metadata about the project, such as its dependencies.

You can observe that the project is now installed with `pip list`.

```
$ pip list
Package      Version  Location
-----
click        6.7
Flask        1.0
flaskr       1.0.0    /home/user/Projects/flask-tutorial
itsdangerous 0.24
Jinja2       2.10
MarkupSafe   1.0
pip          9.0.3
setuptools   39.0.1
Werkzeug     0.14.1
wheel        0.30.0
```

Nothing changes from how you've been running your project so far. `FLASK_APP` is still set to `flaskr` and `flask run` still runs the application, but you can call it from anywhere, not just the `flask-tutorial` directory.

Continue to [Test Coverage](#).

1.5.9 Test Coverage

Writing unit tests for your application lets you check that the code you wrote works the way you expect. Flask provides a test client that simulates requests to the application and returns the response data.

You should test as much of your code as possible. Code in functions only runs when the function is called, and code in branches, such as `if` blocks, only runs when the condition is met. You want to make sure that each function is tested with data that covers each branch.

The closer you get to 100% coverage, the more comfortable you can be that making a change won't unexpectedly change other behavior. However, 100% coverage doesn't guarantee that your application doesn't have bugs. In particular, it doesn't test how the user interacts with the application in the browser. Despite this, test coverage is an important tool to use during development.

Note: This is being introduced late in the tutorial, but in your future projects you should test as you develop.

You'll use `pytest` and `coverage` to test and measure your code. Install them both:

```
$ pip install pytest coverage
```

Setup and Fixtures

The test code is located in the `tests` directory. This directory is *next to* the `flaskr` package, not inside it. The `tests/conftest.py` file contains setup functions called *fixtures* that each test will use. Tests are in Python modules that start with `test_`, and each test function in those modules also starts with `test_`.

Each test will create a new temporary database file and populate some data that will be used in the tests. Write a SQL file to insert that data.

Listing 32: `tests/data.sql`

```
INSERT INTO user (username, password)
VALUES
  ('test', 'pbkdf2:sha256:50000$TCI4GzcX
↪$0de171a4f4dac32e3364c7ddc7c14f3e2fa61f2d17574483f7ffbb431b4acb2f'),
  ('other', 'pbkdf2:sha256:50000$kJPKsz6N
↪$d2d4784f1b030a9761f5cceaeca413f27f2ecb76d6168407af962ddce849f79');

INSERT INTO post (title, body, author_id, created)
VALUES
  ('test title', 'test' || x'0a' || 'body', 1, '2018-01-01 00:00:00');
```

The app fixture will call the factory and pass `test_config` to configure the application and database for testing instead of using your local development configuration.

Listing 33: `tests/conftest.py`

```
import os
import tempfile

import pytest
from flask import create_app
from flaskr.db import get_db, init_db

with open(os.path.join(os.path.dirname(__file__), 'data.sql'), 'rb') as f:
    _data_sql = f.read().decode('utf8')

@pytest.fixture
def app():
    db_fd, db_path = tempfile.mkstemp()

    app = create_app({
        'TESTING': True,
        'DATABASE': db_path,
    })

    with app.app_context():
        init_db()
        get_db().executescript(_data_sql)

    yield app

    os.close(db_fd)
    os.unlink(db_path)

@pytest.fixture
def client(app):
```

(continues on next page)

(continued from previous page)

```
    return app.test_client()

@pytest.fixture
def runner(app):
    return app.test_cli_runner()
```

`tempfile.mkstemp()` creates and opens a temporary file, returning the file descriptor and the path to it. The `DATABASE` path is overridden so it points to this temporary path instead of the instance folder. After setting the path, the database tables are created and the test data is inserted. After the test is over, the temporary file is closed and removed.

`TESTING` tells Flask that the app is in test mode. Flask changes some internal behavior so it's easier to test, and other extensions can also use the flag to make testing them easier.

The `client` fixture calls `app.test_client()` with the application object created by the app fixture. Tests will use the client to make requests to the application without running the server.

The `runner` fixture is similar to `client`. `app.test_cli_runner()` creates a runner that can call the Click commands registered with the application.

Pytest uses fixtures by matching their function names with the names of arguments in the test functions. For example, the `test_hello` function you'll write next takes a `client` argument. Pytest matches that with the `client` fixture function, calls it, and passes the returned value to the test function.

Factory

There's not much to test about the factory itself. Most of the code will be executed for each test already, so if something fails the other tests will notice.

The only behavior that can change is passing test config. If config is not passed, there should be some default configuration, otherwise the configuration should be overridden.

Listing 34: tests/test_factory.py

```
from flaskr import create_app

def test_config():
    assert not create_app().testing
    assert create_app({'TESTING': True}).testing

def test_hello(client):
    response = client.get('/hello')
    assert response.data == b'Hello, World!'
```

You added the hello route as an example when writing the factory at the beginning of the tutorial. It returns “Hello, World!”, so the test checks that the response data matches.

Database

Within an application context, `get_db` should return the same connection each time it’s called. After the context, the connection should be closed.

Listing 35: tests/test_db.py

```
import sqlite3

import pytest
from flaskr.db import get_db

def test_get_close_db(app):
    with app.app_context():
        db = get_db()
        assert db is get_db()

        with pytest.raises(sqlite3.ProgrammingError) as e:
            db.execute('SELECT 1')

        assert 'closed' in str(e.value)
```

The `init-db` command should call the `init_db` function and output a message.

Listing 36: tests/test_db.py

```
def test_init_db_command(runner, monkeypatch):
    class Recorder(object):
        called = False

    def fake_init_db():
        Recorder.called = True

    monkeypatch.setattr('flaskr.db.init_db', fake_init_db)
    result = runner.invoke(args=['init-db'])
    assert 'Initialized' in result.output
    assert Recorder.called
```

This test uses Pytest’s `monkeypatch` fixture to replace the `init_db` function with one that records that it’s been called. The `runner` fixture you wrote above is used to call the `init-db` command by name.

Authentication

For most of the views, a user needs to be logged in. The easiest way to do this in tests is to make a POST request to the login view with the client. Rather than writing that out every time, you can write a class with methods to do that, and use a fixture to pass it the client for each test.

Listing 37: tests/conftest.py

```
class AuthActions(object):
    def __init__(self, client):
        self._client = client

    def login(self, username='test', password='test'):
        return self._client.post(
            '/auth/login',
            data={'username': username, 'password': password}
        )

    def logout(self):
        return self._client.get('/auth/logout')

@pytest.fixture
def auth(client):
    return AuthActions(client)
```

With the auth fixture, you can call `auth.login()` in a test to log in as the test user, which was inserted as part of the test data in the app fixture.

The register view should render successfully on GET. On POST with valid form data, it should redirect to the login URL and the user's data should be in the database. Invalid data should display error messages.

Listing 38: tests/test_auth.py

```
import pytest
from flask import g, session
from flaskr.db import get_db

def test_register(client, app):
    assert client.get('/auth/register').status_code == 200
    response = client.post(
        '/auth/register', data={'username': 'a', 'password': 'a'}
    )
    assert 'http://localhost/auth/login' == response.headers['Location']

    with app.app_context():
        assert get_db().execute(
            "SELECT * FROM user WHERE username = 'a'",
        ).fetchone() is not None

@pytest.mark.parametrize(('username', 'password', 'message'), (
    ('', '', b'Username is required.'),
    ('a', '', b'Password is required.'),
    ('test', 'test', b'already registered'),
))
def test_register_validate_input(client, username, password, message):
    response = client.post(
```

(continues on next page)

(continued from previous page)

```

    '/auth/register',
    data={'username': username, 'password': password}
)
assert message in response.data

```

`client.get()` makes a GET request and returns the *Response* object returned by Flask. Similarly, `client.post()` makes a POST request, converting the data dict into form data.

To test that the page renders successfully, a simple request is made and checked for a 200 OK *status_code*. If rendering failed, Flask would return a 500 Internal Server Error code.

headers will have a Location header with the login URL when the register view redirects to the login view.

data contains the body of the response as bytes. If you expect a certain value to render on the page, check that it's in *data*. Bytes must be compared to bytes. If you want to compare text, use `get_data(as_text=True)` instead.

`pytest.mark.parametrize` tells Pytest to run the same test function with different arguments. You use it here to test different invalid input and error messages without writing the same code three times.

The tests for the login view are very similar to those for register. Rather than testing the data in the database, *session* should have `user_id` set after logging in.

Listing 39: tests/test_auth.py

```

def test_login(client, auth):
    assert client.get('/auth/login').status_code == 200
    response = auth.login()
    assert response.headers['Location'] == 'http://localhost/'

    with client:
        client.get('/')
        assert session['user_id'] == 1
        assert g.user['username'] == 'test'

@pytest.mark.parametrize(('username', 'password', 'message'), (
    ('a', 'test', b'Incorrect username.'),
    ('test', 'a', b'Incorrect password.'),
))
def test_login_validate_input(auth, username, password, message):
    response = auth.login(username, password)
    assert message in response.data

```

Using `client` in a `with` block allows accessing context variables such as *session* after the response is returned. Normally, accessing *session* outside of a request would raise an error.

Testing logout is the opposite of login. *session* should not contain `user_id` after logging out.

Listing 40: tests/test_auth.py

```
def test_logout(client, auth):
    auth.login()

    with client:
        auth.logout()
        assert 'user_id' not in session
```

Blog

All the blog views use the `auth` fixture you wrote earlier. Call `auth.login()` and subsequent requests from the client will be logged in as the `test` user.

The `index` view should display information about the post that was added with the test data. When logged in as the author, there should be a link to edit the post.

You can also test some more authentication behavior while testing the `index` view. When not logged in, each page shows links to log in or register. When logged in, there's a link to log out.

Listing 41: tests/test_blog.py

```
import pytest
from flaskr.db import get_db

def test_index(client, auth):
    response = client.get('/')
    assert b"Log In" in response.data
    assert b"Register" in response.data

    auth.login()
    response = client.get('/')
    assert b'Log Out' in response.data
    assert b'test title' in response.data
    assert b'by test on 2018-01-01' in response.data
    assert b'test\nbody' in response.data
    assert b'href="/1/update"' in response.data
```

A user must be logged in to access the `create`, `update`, and `delete` views. The logged in user must be the author of the post to access `update` and `delete`, otherwise a `403 Forbidden` status is returned. If a post with the given `id` doesn't exist, `update` and `delete` should return `404 Not Found`.

Listing 42: tests/test_blog.py

```
@pytest.mark.parametrize('path', (
    '/create',
    '/1/update',
    '/1/delete',
))
def test_login_required(client, path):
    response = client.post(path)
    assert response.headers['Location'] == 'http://localhost/auth/login'

def test_author_required(app, client, auth):
    # change the post author to another user
```

(continues on next page)

```

with app.app_context():
    db = get_db()
    db.execute('UPDATE post SET author_id = 2 WHERE id = 1')
    db.commit()

auth.login()
# current user can't modify other user's post
assert client.post('/1/update').status_code == 403
assert client.post('/1/delete').status_code == 403
# current user doesn't see edit link
assert b'href="/1/update"' not in client.get('/').data

@pytest.mark.parametrize('path', (
    '/2/update',
    '/2/delete',
))
def test_exists_required(client, auth, path):
    auth.login()
    assert client.post(path).status_code == 404

```

The create and update views should render and return a 200 OK status for a GET request. When valid data is sent in a POST request, create should insert the new post data into the database, and update should modify the existing data. Both pages should show an error message on invalid data.

Listing 43: tests/test_blog.py

```

def test_create(client, auth, app):
    auth.login()
    assert client.get('/create').status_code == 200
    client.post('/create', data={'title': 'created', 'body': ''})

    with app.app_context():
        db = get_db()
        count = db.execute('SELECT COUNT(id) FROM post').fetchone()[0]
        assert count == 2

def test_update(client, auth, app):
    auth.login()
    assert client.get('/1/update').status_code == 200
    client.post('/1/update', data={'title': 'updated', 'body': ''})

    with app.app_context():
        db = get_db()
        post = db.execute('SELECT * FROM post WHERE id = 1').fetchone()
        assert post['title'] == 'updated'

@pytest.mark.parametrize('path', (
    '/create',
    '/1/update',
))
def test_create_update_validate(client, auth, path):
    auth.login()
    response = client.post(path, data={'title': '', 'body': ''})
    assert b'Title is required.' in response.data

```

The delete view should redirect to the index URL and the post should no longer exist in the database.

Listing 44: tests/test_blog.py

```
def test_delete(client, auth, app):
    auth.login()
    response = client.post('/1/delete')
    assert response.headers['Location'] == 'http://localhost/'

    with app.app_context():
        db = get_db()
        post = db.execute('SELECT * FROM post WHERE id = 1').fetchone()
        assert post is None
```

Running the Tests

Some extra configuration, which is not required but makes running tests with coverage less verbose, can be added to the project's `setup.cfg` file.

Listing 45: setup.cfg

```
[tool:pytest]
testpaths = tests

[coverage:run]
branch = True
source =
    flaskr
```

To run the tests, use the `pytest` command. It will find and run all the test functions you've written.

```
$ pytest

===== test session starts =====
platform linux -- Python 3.6.4, pytest-3.5.0, py-1.5.3, pluggy-0.6.0
rootdir: /home/user/Projects/flask-tutorial, inifile: setup.cfg
collected 23 items

tests/test_auth.py ..... [ 34%]
tests/test_blog.py ..... [ 86%]
tests/test_db.py .. [ 95%]
tests/test_factory.py .. [100%]

===== 24 passed in 0.64 seconds =====
```

If any tests fail, `pytest` will show the error that was raised. You can run `pytest -v` to get a list of each test function rather than dots.

To measure the code coverage of your tests, use the `coverage` command to run `pytest` instead of running it directly.

```
$ coverage run -m pytest
```

You can either view a simple coverage report in the terminal:

```
$ coverage report

Name                               Stmts  Miss Branch BrPart  Cover
-----
```

(continues on next page)

(continued from previous page)

flaskr/___init___.py	21	0	2	0	100%
flaskr/auth.py	54	0	22	0	100%
flaskr/blog.py	54	0	16	0	100%
flaskr/db.py	24	0	4	0	100%

TOTAL	153	0	44	0	100%

An HTML report allows you to see which lines were covered in each file:

```
$ coverage html
```

This generates files in the `htmlcov` directory. Open `htmlcov/index.html` in your browser to see the report.

Continue to [Deploy to Production](#).

1.5.10 Deploy to Production

This part of the tutorial assumes you have a server that you want to deploy your application to. It gives an overview of how to create the distribution file and install it, but won't go into specifics about what server or software to use. You can set up a new environment on your development computer to try out the instructions below, but probably shouldn't use it for hosting a real public application. See [Deployment Options](#) for a list of many different ways to host your application.

Build and Install

When you want to deploy your application elsewhere, you build a distribution file. The current standard for Python distribution is the *wheel* format, with the `.whl` extension. Make sure the wheel library is installed first:

```
$ pip install wheel
```

Running `setup.py` with Python gives you a command line tool to issue build-related commands. The `bdist_wheel` command will build a wheel distribution file.

```
$ python setup.py bdist_wheel
```

You can find the file in `dist/flaskr-1.0.0-py3-none-any.whl`. The file name is in the format of `{project name}-{version}-{python tag}-{abi tag}-{platform tag}`.

Copy this file to another machine, [set up a new virtualenv](#), then install the file with `pip`.

```
$ pip install flaskr-1.0.0-py3-none-any.whl
```

Pip will install your project along with its dependencies.

Since this is a different machine, you need to run `init-db` again to create the database in the instance folder.

Bash

CMD

Powershell

```
$ export FLASK_APP=flaskr
$ flask init-db
```

```
> set FLASK_APP=flaskr
> flask init-db
```

```
> $env:FLASK_APP = "flaskr"  
> flask init-db
```

When Flask detects that it's installed (not in editable mode), it uses a different directory for the instance folder. You can find it at `venv/var/flaskr-instance` instead.

Configure the Secret Key

In the beginning of the tutorial that you gave a default value for `SECRET_KEY`. This should be changed to some random bytes in production. Otherwise, attackers could use the public 'dev' key to modify the session cookie, or anything else that uses the secret key.

You can use the following command to output a random secret key:

```
$ python -c 'import os; print(os.urandom(16))'  
  
b'_5#y2L"F4Q8z\n\xec]/'
```

Create the `config.py` file in the instance folder, which the factory will read from if it exists. Copy the generated value into it.

Listing 46: `venv/var/flaskr-instance/config.py`

```
SECRET_KEY = b'_5#y2L"F4Q8z\n\xec]/'
```

You can also set any other necessary configuration here, although `SECRET_KEY` is the only one needed for Flask.

Run with a Production Server

When running publicly rather than in development, you should not use the built-in development server (`flask run`). The development server is provided by Werkzeug for convenience, but is not designed to be particularly efficient, stable, or secure.

Instead, use a production WSGI server. For example, to use [Waitress](#), first install it in the virtual environment:

```
$ pip install waitress
```

You need to tell Waitress about your application, but it doesn't use `FLASK_APP` like `flask run` does. You need to tell it to import and call the application factory to get an application object.

```
$ waitress-serve --call 'flaskr:create_app'  
  
Serving on http://0.0.0.0:8080
```

See [Deployment Options](#) for a list of many different ways to host your application. Waitress is just an example, chosen for the tutorial because it supports both Windows and Linux. There are many more WSGI servers and deployment options that you may choose for your project.

Continue to [Keep Developing!](#).

1.5.11 Keep Developing!

You've learned about quite a few Flask and Python concepts throughout the tutorial. Go back and review the tutorial and compare your code with the steps you took to get there. Compare your project to the [example project](#), which might look a bit different due to the step-by-step nature of the tutorial.

There's a lot more to Flask than what you've seen so far. Even so, you're now equipped to start developing your own web applications. Check out the [Quickstart](#) for an overview of what Flask can do, then dive into the docs to keep learning. Flask uses [Jinja](#), [Click](#), [Werkzeug](#), and [ItsDangerous](#) behind the scenes, and they all have their own documentation too. You'll also be interested in [Extensions](#) which make tasks like working with the database or validating form data easier and more powerful.

If you want to keep developing your Flaskr project, here are some ideas for what to try next:

- A detail view to show a single post. Click a post's title to go to its page.
- Like / unlike a post.
- Comments.
- Tags. Clicking a tag shows all the posts with that tag.
- A search box that filters the index page by name.
- Paged display. Only show 5 posts per page.
- Upload an image to go along with a post.
- Format posts using Markdown.
- An RSS feed of new posts.


Have fun and make awesome applications!

This tutorial will walk you through creating a basic blog application called Flaskr. Users will be able to register, log in, create posts, and edit or delete their own posts. You will be able to package and install the application on other computers.




It's assumed that you're already familiar with Python. The [official tutorial](#) in the Python docs is a great way to learn or review first.

While it's designed to give a good starting point, the tutorial doesn't cover all of Flask's features. Check out the [Quickstart](#) for an overview of what Flask can do, then dive into the docs to find out more. The tutorial only uses what's provided by Flask and Python. In another project, you might decide to use [Extensions](#) or other libraries to make some tasks simpler.

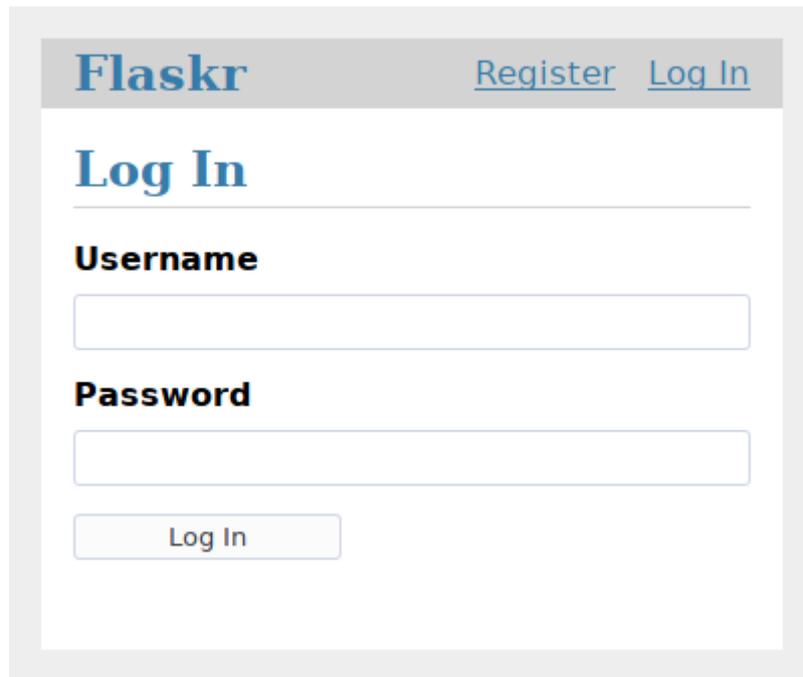

The image shows a web application interface for a site named "Flaskr". At the top left, the word "Flaskr" is displayed in a blue serif font. To its right, there are two links: "Register" and "Log In", both in a blue sans-serif font and underlined. Below this header, the main content area has a large blue heading "Log In" followed by a horizontal line. Underneath the line, the word "Username" is written in a bold black sans-serif font, followed by a white rectangular input field with a thin blue border. Below the input field, the word "Password" is written in a bold black sans-serif font, followed by another white rectangular input field with a thin blue border. At the bottom of the form, there is a light gray button with rounded corners and the text "Log In" in a black sans-serif font.

Flask is flexible. It doesn't require you to use any particular project or code layout. However, when first starting, it's helpful to use a more structured approach. This means that the tutorial will require a bit of boilerplate up front, but it's done to avoid many common pitfalls that new developers encounter, and it creates a project that's easy to expand on. Once you become more comfortable with Flask, you can step out of this structure and take full advantage of Flask's flexibility.

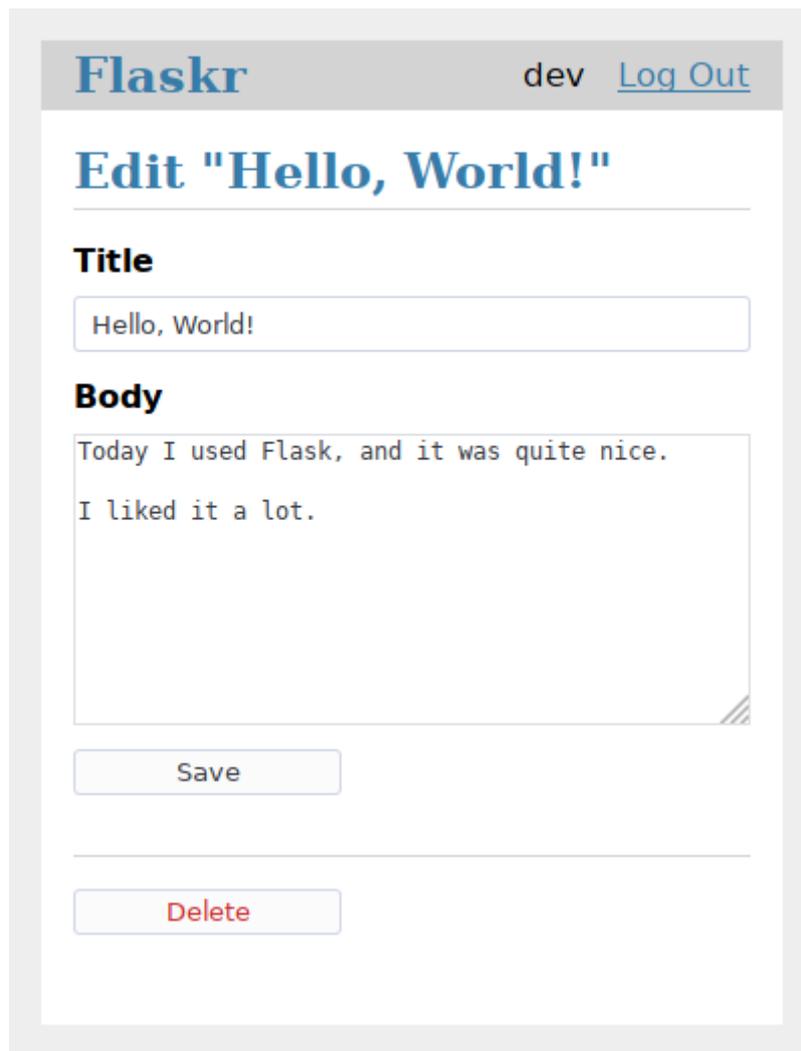

The screenshot shows a web interface for editing a post. At the top, there is a header with the word "Flaskr" in blue, the text "dev", and a "Log Out" link. Below the header, the main heading is "Edit 'Hello, World!'" in blue. Underneath, there are two sections: "Title" and "Body". The "Title" section has a text input field containing "Hello, World!". The "Body" section has a larger text area containing the text "Today I used Flask, and it was quite nice. I liked it a lot." Below the text area, there are two buttons: a "Save" button and a "Delete" button. The "Delete" button is highlighted in red.

The tutorial project is available as an example in the [Flask repository](#), if you want to compare your project with the final product as you follow the tutorial.

Continue to *Project Layout*.

1.6 Templates

Flask leverages Jinja2 as its template engine. You are obviously free to use a different template engine, but you still have to install Jinja2 to run Flask itself. This requirement is necessary to enable rich extensions. An extension can depend on Jinja2 being present.

This section only gives a very quick introduction into how Jinja2 is integrated into Flask. If you want information on the template engine's syntax itself, head over to the official [Jinja2 Template Documentation](#) for more information.

1.6.1 Jinja Setup

Unless customized, Jinja2 is configured by Flask as follows:

- autoescaping is enabled for all templates ending in `.html`, `.htm`, `.xml` as well as `.xhtml` when using `render_template()`.
- autoescaping is enabled for all strings when using `render_template_string()`.
- a template has the ability to opt in/out autoescaping with the `{% autoescape %}` tag.
- Flask inserts a couple of global functions and helpers into the Jinja2 context, additionally to the values that are present by default.

1.6.2 Standard Context

The following global variables are available within Jinja2 templates by default:

config

The current configuration object (*flask.Flask.config*)

Changed in version 0.10: This is now always available, even in imported templates.

New in version 0.6.

request

The current request object (*flask.request*). This variable is unavailable if the template was rendered without an active request context.

session

The current session object (*flask.session*). This variable is unavailable if the template was rendered without an active request context.

g

The request-bound object for global variables (*flask.g*). This variable is unavailable if the template was rendered without an active request context.

url_for()

The *flask.url_for()* function.

get_flashed_messages()

The *flask.get_flashed_messages()* function.

The Jinja Context Behavior

These variables are added to the context of variables, they are not global variables. The difference is that by default these will not show up in the context of imported templates. This is partially caused by performance considerations, partially to keep things explicit.

What does this mean for you? If you have a macro you want to import, that needs to access the request object you have two possibilities:

1. you explicitly pass the request to the macro as parameter, or the attribute of the request object you are interested in.
2. you import the macro “with context”.

Importing with context looks like this:

```
{% from '_helpers.html' import my_macro with context %}
```

1.6.3 Controlling Autoescaping

Autoescaping is the concept of automatically escaping special characters for you. Special characters in the sense of HTML (or XML, and thus XHTML) are `&`, `>`, `<`, `"` as well as `'`. Because these characters carry specific meanings in documents on their own you have to replace them by so called “entities” if you want to use them for text. Not doing so would not only cause user frustration by the inability to use these characters in text, but can also lead to security problems. (see *Cross-Site Scripting (XSS)*)

Sometimes however you will need to disable autoescaping in templates. This can be the case if you want to explicitly inject HTML into pages, for example if they come from a system that generates secure HTML like a markdown to HTML converter.

There are three ways to accomplish that:

- In the Python code, wrap the HTML string in a *Markup* object before passing it to the template. This is in general the recommended way.
- Inside the template, use the `|safe` filter to explicitly mark a string as safe HTML (`{{ myvariable|safe }}`)
- Temporarily disable the autoescape system altogether.

To disable the autoescape system in templates, you can use the `{% autoescape %}` block:

```
{% autoescape false %}
  <p>autoescaping is disabled here
  <p>{{ will_not_be_escaped }}
{% endautoescape %}
```

Whenever you do this, please be very cautious about the variables you are using in this block.

1.6.4 Registering Filters

If you want to register your own filters in Jinja2 you have two ways to do that. You can either put them by hand into the `jinja_env` of the application or use the `template_filter()` decorator.

The two following examples work the same and both reverse an object:

```
@app.template_filter('reverse')
def reverse_filter(s):
    return s[::-1]

def reverse_filter(s):
    return s[::-1]
app.jinja_env.filters['reverse'] = reverse_filter
```

In case of the decorator the argument is optional if you want to use the function name as name of the filter. Once registered, you can use the filter in your templates in the same way as Jinja2’s builtin filters, for example if you have a Python list in context called *mylist*:

```
{% for x in mylist | reverse %}
{% endfor %}
```

1.6.5 Context Processors

To inject new variables automatically into the context of a template, context processors exist in Flask. Context processors run before the template is rendered and have the ability to inject new values into the template context. A context processor is a function that returns a dictionary. The keys and values of this dictionary are then merged with the template context, for all templates in the app:

```
@app.context_processor
def inject_user():
    return dict(user=g.user)
```

The context processor above makes a variable called *user* available in the template with the value of *g.user*. This example is not very interesting because *g* is available in templates anyways, but it gives an idea how this works.

Variables are not limited to values; a context processor can also make functions available to templates (since Python allows passing around functions):

```
@app.context_processor
def utility_processor():
    def format_price(amount, currency="€"):
        return f"{amount:.2f}{currency}"
    return dict(format_price=format_price)
```

The context processor above makes the *format_price* function available to all templates:

```
{{ format_price(0.33) }}
```

You could also build *format_price* as a template filter (see [Registering Filters](#)), but this demonstrates how to pass functions in a context processor.

1.7 Testing Flask Applications

Something that is untested is broken.

The origin of this quote is unknown and while it is not entirely correct, it is also not far from the truth. Untested applications make it hard to improve existing code and developers of untested applications tend to become pretty paranoid. If an application has automated tests, you can safely make changes and instantly know if anything breaks.

Flask provides a way to test your application by exposing the Werkzeug test `Client` and handling the context locals for you. You can then use that with your favourite testing solution.

In this documentation we will use the `pytest` package as the base framework for our tests. You can install it with `pip`, like so:

```
$ pip install pytest
```

1.7.1 The Application

First, we need an application to test; we will use the application from the [Tutorial](#). If you don't have that application yet, get the source code from [the examples](#).

So that we can import the module `flaskr` correctly, we need to run `pip install -e .` in the folder `tutorial`.

1.7.2 The Testing Skeleton

We begin by adding a tests directory under the application root. Then create a Python file to store our tests (`test_flaskr.py`). When we format the filename like `test_*.py`, it will be auto-discoverable by `pytest`.

Next, we create a `pytest` fixture called `client()` that configures the application for testing and initializes a new database:

```
import os
import tempfile

import pytest

from flask import create_app
from flask.db import init_db

@pytest.fixture
def client():
    db_fd, db_path = tempfile.mkstemp()
    app = create_app({'TESTING': True, 'DATABASE': db_path})

    with app.test_client() as client:
        with app.app_context():
            init_db()
            yield client

    os.close(db_fd)
    os.unlink(db_path)
```

This client fixture will be called by each individual test. It gives us a simple interface to the application, where we can trigger test requests to the application. The client will also keep track of cookies for us.

During setup, the `TESTING` config flag is activated. What this does is disable error catching during request handling, so that you get better error reports when performing test requests against the application.

Because SQLite3 is filesystem-based, we can easily use the `tempfile` module to create a temporary database and initialize it. The `mkstemp()` function does two things for us: it returns a low-level file handle and a random file name, the latter we use as database name. We just have to keep the `db_fd` around so that we can use the `os.close()` function to close the file.

To delete the database after the test, the fixture closes the file and removes it from the filesystem.

If we now run the test suite, we should see the following output:

```
$ pytest

===== test session starts =====
rootdir: ./flask/examples/flaskr, inifile: setup.cfg
collected 0 items

===== no tests ran in 0.07 seconds =====
```

Even though it did not run any actual tests, we already know that our `flaskr` application is syntactically valid, otherwise the import would have died with an exception.

1.7.3 The First Test

Now it's time to start testing the functionality of the application. Let's check that the application shows "No entries here so far" if we access the root of the application (/). To do this, we add a new test function to `test_flaskr.py`, like this:

```
def test_empty_db(client):
    """Start with a blank database."""

    rv = client.get('/')
    assert b'No entries here so far' in rv.data
```

Notice that our test functions begin with the word *test*; this allows `pytest` to automatically identify the function as a test to run.

By using `client.get` we can send an HTTP GET request to the application with the given path. The return value will be a `response_class` object. We can now use the `data` attribute to inspect the return value (as string) from the application. In this case, we ensure that `'No entries here so far'` is part of the output.

Run it again and you should see one passing test:

```
$ pytest -v

===== test session starts =====
rootdir: ./flask/examples/flaskr, inifile: setup.cfg
collected 1 items

tests/test_flaskr.py::test_empty_db PASSED

===== 1 passed in 0.10 seconds =====
```

1.7.4 Logging In and Out

The majority of the functionality of our application is only available for the administrative user, so we need a way to log our test client in and out of the application. To do this, we fire some requests to the login and logout pages with the required form data (username and password). And because the login and logout pages redirect, we tell the client to *follow_redirects*.

Add the following two functions to your `test_flaskr.py` file:

```
def login(client, username, password):
    return client.post('/login', data=dict(
        username=username,
        password=password
    ), follow_redirects=True)

def logout(client):
    return client.get('/logout', follow_redirects=True)
```

Now we can easily test that logging in and out works and that it fails with invalid credentials. Add this new test function:

```
def test_login_logout(client):
    """Make sure login and logout works."""

    username = flaskr.app.config["USERNAME"]
    password = flaskr.app.config["PASSWORD"]
```

(continues on next page)

(continued from previous page)

```
rv = login(client, username, password)
assert b'You were logged in' in rv.data

rv = logout(client)
assert b'You were logged out' in rv.data

rv = login(client, f"{username}x", password)
assert b'Invalid username' in rv.data

rv = login(client, username, f'{password}x')
assert b'Invalid password' in rv.data
```

1.7.5 Test Adding Messages

We should also test that adding messages works. Add a new test function like this:

```
def test_messages(client):
    """Test that messages work."""

    login(client, flaskr.app.config['USERNAME'], flaskr.app.config['PASSWORD'])
    rv = client.post('/add', data=dict(
        title='<Hello>',
        text='<strong>HTML</strong> allowed here'
    ), follow_redirects=True)
    assert b'No entries here so far' not in rv.data
    assert b'&lt;Hello&gt;' in rv.data
    assert b'<strong>HTML</strong> allowed here' in rv.data
```

Here we check that HTML is allowed in the text but not in the title, which is the intended behavior.

Running that should now give us three passing tests:

```
$ pytest -v

===== test session starts =====
rootdir: ./flask/examples/flaskr, inifile: setup.cfg
collected 3 items

tests/test_flaskr.py::test_empty_db PASSED
tests/test_flaskr.py::test_login_logout PASSED
tests/test_flaskr.py::test_messages PASSED

===== 3 passed in 0.23 seconds =====
```

1.7.6 Other Testing Tricks

Besides using the test client as shown above, there is also the `test_request_context()` method that can be used in combination with the `with` statement to activate a request context temporarily. With this you can access the `request`, `g` and `session` objects like in view functions. Here is a full example that demonstrates this approach:

```
from flask import Flask, request

app = Flask(__name__)

with app.test_request_context('/?name=Peter'):
    assert request.path == '/'
    assert request.args['name'] == 'Peter'
```

All the other objects that are context bound can be used in the same way.

If you want to test your application with different configurations and there does not seem to be a good way to do that, consider switching to application factories (see *Application Factories*).

Note however that if you are using a test request context, the `before_request()` and `after_request()` functions are not called automatically. However `teardown_request()` functions are indeed executed when the test request context leaves the `with` block. If you do want the `before_request()` functions to be called as well, you need to call `preprocess_request()` yourself:

```
app = Flask(__name__)

with app.test_request_context('/?name=Peter'):
    app.preprocess_request()
    ...
```

This can be necessary to open database connections or something similar depending on how your application was designed.

If you want to call the `after_request()` functions you need to call into `process_response()` which however requires that you pass it a response object:

```
app = Flask(__name__)

with app.test_request_context('/?name=Peter'):
    resp = Response('...')
    resp = app.process_response(resp)
    ...
```

This in general is less useful because at that point you can directly start using the test client.

1.7.7 Faking Resources and Context

New in version 0.10.

A very common pattern is to store user authorization information and database connections on the application context or the `flask.g` object. The general pattern for this is to put the object on there on first usage and then to remove it on a teardown. Imagine for instance this code to get the current user:

```
def get_user():
    user = getattr(g, 'user', None)
    if user is None:
        user = fetch_current_user_from_database()
        g.user = user
    return user
```

For a test it would be nice to override this user from the outside without having to change some code. This can be accomplished with hooking the `flask.appcontext_pushed` signal:

```
from contextlib import contextmanager
from flask import appcontext_pushed, g

@contextmanager
def user_set(app, user):
    def handler(sender, **kwargs):
        g.user = user
    with appcontext_pushed.connected_to(handler, app):
        yield
```

And then to use it:

```
from flask import json, jsonify

@app.route('/users/me')
def users_me():
    return jsonify(username=g.user.username)

with user_set(app, my_user):
    with app.test_client() as c:
        resp = c.get('/users/me')
        data = json.loads(resp.data)
        assert data['username'] == my_user.username
```

1.7.8 Keeping the Context Around

New in version 0.4.

Sometimes it is helpful to trigger a regular request but still keep the context around for a little longer so that additional introspection can happen. With Flask 0.4 this is possible by using the `test_client()` with a `with` block:

```
app = Flask(__name__)

with app.test_client() as c:
    rv = c.get('/?tequila=42')
    assert request.args['tequila'] == '42'
```

If you were to use just the `test_client()` without the `with` block, the `assert` would fail with an error because `request` is no longer available (because you are trying to use it outside of the actual request).

1.7.9 Accessing and Modifying Sessions

New in version 0.8.

Sometimes it can be very helpful to access or modify the sessions from the test client. Generally there are two ways for this. If you just want to ensure that a session has certain keys set to certain values you can just keep the context around and access `flask.session`:

```
with app.test_client() as c:
    rv = c.get('/')
    assert session['foo'] == 42
```

This however does not make it possible to also modify the session or to access the session before a request was fired. Starting with Flask 0.8 we provide a so called “session transaction” which simulates the appropriate calls to

open a session in the context of the test client and to modify it. At the end of the transaction the session is stored and ready to be used by the test client. This works independently of the session backend used:

```
with app.test_client() as c:
    with c.session_transaction() as sess:
        sess['a_key'] = 'a value'

    # once this is reached the session was stored and ready to be used by the client
    c.get(...)
```

Note that in this case you have to use the `sess` object instead of the `flask.session` proxy. The object however itself will provide the same interface.

1.7.10 Testing JSON APIs

New in version 1.0.

Flask has great support for JSON, and is a popular choice for building JSON APIs. Making requests with JSON data and examining JSON data in responses is very convenient:

```
from flask import request, jsonify

@app.route('/api/auth')
def auth():
    json_data = request.get_json()
    email = json_data['email']
    password = json_data['password']
    return jsonify(token=generate_token(email, password))

with app.test_client() as c:
    rv = c.post('/api/auth', json={
        'email': 'flask@example.com', 'password': 'secret'
    })
    json_data = rv.get_json()
    assert verify_token(email, json_data['token'])
```

Passing the `json` argument in the test client methods sets the request data to the JSON-serialized object and sets the content type to `application/json`. You can get the JSON data from the request or response with `get_json`.

1.7.11 Testing CLI Commands

Click comes with utilities for testing your CLI commands. A `CliRunner` runs commands in isolation and captures the output in a `Result` object.

Flask provides `test_cli_runner()` to create a `FlaskCliRunner` that passes the Flask app to the CLI automatically. Use its `invoke()` method to call commands in the same way they would be called from the command line.

```
import click

@app.cli.command('hello')
@click.option('--name', default='World')
def hello_command(name):
    click.echo(f'Hello, {name}!')

def test_hello():
    runner = app.test_cli_runner()
```

(continues on next page)

```
# invoke the command directly
result = runner.invoke(hello_command, ['--name', 'Flask'])
assert 'Hello, Flask' in result.output

# or by name
result = runner.invoke(args=['hello'])
assert 'World' in result.output
```

In the example above, invoking the command by name is useful because it verifies that the command was correctly registered with the app.

If you want to test how your command parses parameters, without running the command, use its `make_context()` method. This is useful for testing complex validation rules and custom types.

```
def upper(ctx, param, value):
    if value is not None:
        return value.upper()

@app.cli.command('hello')
@click.option('--name', default='World', callback=upper)
def hello_command(name):
    click.echo(f'Hello, {name}!')

def test_hello_params():
    context = hello_command.make_context('hello', ['--name', 'flask'])
    assert context.params['name'] == 'FLASK'
```

1.8 Handling Application Errors

Applications fail, servers fail. Sooner or later you will see an exception in production. Even if your code is 100% correct, you will still see exceptions from time to time. Why? Because everything else involved will fail. Here are some situations where perfectly fine code can lead to server errors:

- the client terminated the request early and the application was still reading from the incoming data
- the database server was overloaded and could not handle the query
- a filesystem is full
- a harddrive crashed
- a backend server overloaded
- a programming error in a library you are using
- network connection of the server to another system failed

And that's just a small sample of issues you could be facing. So how do we deal with that sort of problem? By default if your application runs in production mode, and an exception is raised Flask will display a very simple page for you and log the exception to the *logger*.

But there is more you can do, and we will cover some better setups to deal with errors including custom exceptions and 3rd party tools.

1.8.1 Error Logging Tools

Sending error mails, even if just for critical ones, can become overwhelming if enough users are hitting the error and log files are typically never looked at. This is why we recommend using [Sentry](#) for dealing with application errors. It's available as a source-available project [on GitHub](#) and is also available as a [hosted version](#) which you can try for free. Sentry aggregates duplicate errors, captures the full stack trace and local variables for debugging, and sends you mails based on new errors or frequency thresholds.

To use Sentry you need to install the `sentry-sdk` client with extra `flask` dependencies.

```
$ pip install sentry-sdk[flask]
```

And then add this to your Flask app:

```
import sentry_sdk
from sentry_sdk.integrations.flask import FlaskIntegration

sentry_sdk.init('YOUR_DSN_HERE', integrations=[FlaskIntegration()])
```

The `YOUR_DSN_HERE` value needs to be replaced with the DSN value you get from your Sentry installation.

After installation, failures leading to an Internal Server Error are automatically reported to Sentry and from there you can receive error notifications.

See also:

- [Sentry also supports catching errors from a worker queue \(RQ, Celery, etc.\) in a similar fashion. See the Python SDK docs for more information.](#)
- [Getting started with Sentry](#)
- [Flask-specific documentation](#)

1.8.2 Error Handlers

When an error occurs in Flask, an appropriate [HTTP status code](#) will be returned. 400-499 indicate errors with the client's request data, or about the data requested. 500-599 indicate errors with the server or application itself.

You might want to show custom error pages to the user when an error occurs. This can be done by registering error handlers.

An error handler is a function that returns a response when a type of error is raised, similar to how a view is a function that returns a response when a request URL is matched. It is passed the instance of the error being handled, which is most likely a [HTTPException](#).

The status code of the response will not be set to the handler's code. Make sure to provide the appropriate HTTP status code when returning a response from a handler.

Registering

Register handlers by decorating a function with [`errorhandler\(\)`](#). Or use [`register_error_handler\(\)`](#) to register the function later. Remember to set the error code when returning the response.

```
@app.errorhandler(werkzeug.exceptions.BadRequest)
def handle_bad_request(e):
    return 'bad request!', 400

# or, without the decorator
app.register_error_handler(400, handle_bad_request)
```

`werkzeug.exceptions.HTTPException` subclasses like `BadRequest` and their HTTP codes are interchangeable when registering handlers. (`BadRequest.code == 400`)

Non-standard HTTP codes cannot be registered by code because they are not known by Werkzeug. Instead, define a subclass of `HTTPException` with the appropriate code and register and raise that exception class.

```
class InsufficientStorage(werkzeug.exceptions.HTTPException):
    code = 507
    description = 'Not enough storage space.'

app.register_error_handler(InsufficientStorage, handle_507)

raise InsufficientStorage()
```

Handlers can be registered for any exception class, not just `HTTPException` subclasses or HTTP status codes. Handlers can be registered for a specific class, or for all subclasses of a parent class.

Handling

When building a Flask application you *will* run into exceptions. If some part of your code breaks while handling a request (and you have no error handlers registered), a “500 Internal Server Error” (`InternalServerError`) will be returned by default. Similarly, “404 Not Found” (`NotFound`) error will occur if a request is sent to an unregistered route. If a route receives an unallowed request method, a “405 Method Not Allowed” (`MethodNotAllowed`) will be raised. These are all subclasses of `HTTPException` and are provided by default in Flask.

Flask gives you the ability to raise any HTTP exception registered by Werkzeug. However, the default HTTP exceptions return simple exception pages. You might want to show custom error pages to the user when an error occurs. This can be done by registering error handlers.

When Flask catches an exception while handling a request, it is first looked up by code. If no handler is registered for the code, Flask looks up the error by its class hierarchy; the most specific handler is chosen. If no handler is registered, `HTTPException` subclasses show a generic message about their code, while other exceptions are converted to a generic “500 Internal Server Error”.

For example, if an instance of `ConnectionRefusedError` is raised, and a handler is registered for `ConnectionError` and `ConnectionRefusedError`, the more specific `ConnectionRefusedError` handler is called with the exception instance to generate the response.

Handlers registered on the blueprint take precedence over those registered globally on the application, assuming a blueprint is handling the request that raises the exception. However, the blueprint cannot handle 404 routing errors because the 404 occurs at the routing level before the blueprint can be determined.

Generic Exception Handlers

It is possible to register error handlers for very generic base classes such as `HTTPException` or even `Exception`. However, be aware that these will catch more than you might expect.

For example, an error handler for `HTTPException` might be useful for turning the default HTML error pages into JSON. However, this handler will trigger for things you don’t cause directly, such as 404 and 405 errors during routing. Be sure to craft your handler carefully so you don’t lose information about the HTTP error.

```
from flask import json
from werkzeug.exceptions import HTTPException

@app.errorhandler(HTTPException)
def handle_exception(e):
    """Return JSON instead of HTML for HTTP errors."""
    # start with the correct headers and status code from the error
    response = e.get_response()
```

(continues on next page)

(continued from previous page)

```
# replace the body with JSON
response.data = json.dumps({
    "code": e.code,
    "name": e.name,
    "description": e.description,
})
response.content_type = "application/json"
return response
```

An error handler for `Exception` might seem useful for changing how all errors, even unhandled ones, are presented to the user. However, this is similar to doing `except Exception:` in Python, it will capture *all* otherwise unhandled errors, including all HTTP status codes.

In most cases it will be safer to register handlers for more specific exceptions. Since `HTTPException` instances are valid WSGI responses, you could also pass them through directly.

```
from werkzeug.exceptions import HTTPException

@app.errorhandler(Exception)
def handle_exception(e):
    # pass through HTTP errors
    if isinstance(e, HTTPException):
        return e

    # now you're handling non-HTTP exceptions only
    return render_template("500_generic.html", e=e), 500
```

Error handlers still respect the exception class hierarchy. If you register handlers for both `HTTPException` and `Exception`, the `Exception` handler will not handle `HTTPException` subclasses because it the `HTTPException` handler is more specific.

Unhandled Exceptions

When there is no error handler registered for an exception, a 500 Internal Server Error will be returned instead. See `flask.Flask.handle_exception()` for information about this behavior.

If there is an error handler registered for `InternalServerError`, this will be invoked. As of Flask 1.1.0, this error handler will always be passed an instance of `InternalServerError`, not the original unhandled error.

The original error is available as `e.original_exception`.

An error handler for “500 Internal Server Error” will be passed uncaught exceptions in addition to explicit 500 errors. In debug mode, a handler for “500 Internal Server Error” will not be used. Instead, the interactive debugger will be shown.

1.8.3 Custom Error Pages

Sometimes when building a Flask application, you might want to raise a `HTTPException` to signal to the user that something is wrong with the request. Fortunately, Flask comes with a handy `abort()` function that aborts a request with a HTTP error from `werkzeug` as desired. It will also provide a plain black and white error page for you with a basic description, but nothing fancy.

Depending on the error code it is less or more likely for the user to actually see such an error.

Consider the code below, we might have a user profile route, and if the user fails to pass a username we can raise a “400 Bad Request”. If the user passes a username and we can’t find it, we raise a “404 Not Found”.

```
from flask import abort, render_template, request

# a username needs to be supplied in the query args
# a successful request would be like /profile?username=jack
@app.route("/profile")
def user_profile():
    username = request.args.get("username")
    # if a username isn't supplied in the request, return a 400 bad request
    if username is None:
        abort(400)

    user = get_user(username=username)
    # if a user can't be found by their username, return 404 not found
    if user is None:
        abort(404)

    return render_template("profile.html", user=user)
```

Here is another example implementation for a “404 Page Not Found” exception:

```
from flask import render_template

@app.errorhandler(404)
def page_not_found(e):
    # note that we set the 404 status explicitly
    return render_template('404.html'), 404
```

When using *Application Factories*:

```
from flask import Flask, render_template

def page_not_found(e):
    return render_template('404.html'), 404

def create_app(config_filename):
    app = Flask(__name__)
    app.register_error_handler(404, page_not_found)
    return app
```

An example template might be this:

```
{% extends "layout.html" %}
{% block title %}Page Not Found{% endblock %}
{% block body %}
<h1>Page Not Found</h1>
<p>What you were looking for is just not there.
<p><a href="{{ url_for('index') }}">go somewhere nice</a>
{% endblock %}
```

Further Examples

The above examples wouldn't actually be an improvement on the default exception pages. We can create a custom 500.html template like this:

```
{% extends "layout.html" %}
{% block title %}Internal Server Error{% endblock %}
{% block body %}
  <h1>Internal Server Error</h1>
  <p>Oops... we seem to have made a mistake, sorry!</p>
  <p><a href="{{ url_for('index') }}">Go somewhere nice instead</a>
{% endblock %}
```

It can be implemented by rendering the template on “500 Internal Server Error”:

```
from flask import render_template

@app.errorhandler(500)
def internal_server_error(e):
    # note that we set the 500 status explicitly
    return render_template('500.html'), 500
```

When using *Application Factories*:

```
from flask import Flask, render_template

def internal_server_error(e):
    return render_template('500.html'), 500

def create_app():
    app = Flask(__name__)
    app.register_error_handler(500, internal_server_error)
    return app
```

When using *Modular Applications with Blueprints*:

```
from flask import Blueprint

blog = Blueprint('blog', __name__)

# as a decorator
@blog.errorhandler(500)
def internal_server_error(e):
    return render_template('500.html'), 500

# or with register_error_handler
blog.register_error_handler(500, internal_server_error)
```

1.8.4 Blueprint Error Handlers

In *Modular Applications with Blueprints*, most error handlers will work as expected. However, there is a caveat concerning handlers for 404 and 405 exceptions. These error handlers are only invoked from an appropriate `raise` statement or a call to `abort` in another of the blueprint's view functions; they are not invoked by, e.g., an invalid URL access.

This is because the blueprint does not “own” a certain URL space, so the application instance has no way of knowing which blueprint error handler it should run if given an invalid URL. If you would like to execute different handling strategies for these errors based on URL prefixes, they may be defined at the application level using the request proxy object.

```
from flask import jsonify, render_template

# at the application level
# not the blueprint level
@app.errorhandler(404)
def page_not_found(e):
    # if a request is in our blog URL space
    if request.path.startswith('/blog/'):
        # we return a custom blog 404 page
        return render_template("blog/404.html"), 404
    else:
        # otherwise we return our generic site-wide 404 page
        return render_template("404.html"), 404

@app.errorhandler(405)
def method_not_allowed(e):
    # if a request has the wrong method to our API
    if request.path.startswith('/api/'):
        # we return a json saying so
        return jsonify(message="Method Not Allowed"), 405
    else:
        # otherwise we return a generic site-wide 405 page
        return render_template("405.html"), 405
```

1.8.5 Returning API Errors as JSON

When building APIs in Flask, some developers realise that the built-in exceptions are not expressive enough for APIs and that the content type of *text/html* they are emitting is not very useful for API consumers.

Using the same techniques as above and `jsonify()` we can return JSON responses to API errors. `abort()` is called with a description parameter. The error handler will use that as the JSON error message, and set the status code to 404.

```
from flask import abort, jsonify

@app.errorhandler(404)
def resource_not_found(e):
    return jsonify(error=str(e)), 404

@app.route("/cheese")
def get_one_cheese():
    resource = get_resource()

    if resource is None:
        abort(404, description="Resource not found")
```

(continues on next page)

(continued from previous page)

```
return jsonify(resource)
```

We can also create custom exception classes. For instance, we can introduce a new custom exception for an API that can take a proper human readable message, a status code for the error and some optional payload to give more context for the error.

This is a simple example:

```
from flask import jsonify, request

class InvalidAPIUsage(Exception):
    status_code = 400

    def __init__(self, message, status_code=None, payload=None):
        super().__init__()
        self.message = message
        if status_code is not None:
            self.status_code = status_code
        self.payload = payload

    def to_dict(self):
        rv = dict(self.payload or ())
        rv['message'] = self.message
        return rv

@app.errorhandler(InvalidAPIUsage)
def invalid_api_usage(e):
    return jsonify(e.to_dict())

# an API app route for getting user information
# a correct request might be /api/user?user_id=420
@app.route("/api/user")
def user_api(user_id):
    user_id = request.args.get("user_id")
    if not user_id:
        raise InvalidAPIUsage("No user id provided!")

    user = get_user(user_id=user_id)
    if not user:
        raise InvalidAPIUsage("No such user!", status_code=404)

    return jsonify(user.to_dict())
```

A view can now raise that exception with an error message. Additionally some extra payload can be provided as a dictionary through the *payload* parameter.

1.8.6 Logging

See *Logging* for information about how to log exceptions, such as by emailing them to admins.

1.8.7 Debugging

See *Debugging Application Errors* for information about how to debug errors in development and production.

1.9 Debugging Application Errors

1.9.1 In Production


Do not run the development server, or enable the built-in debugger, in a production environment. The debugger allows executing arbitrary Python code from the browser. It's protected by a pin, but that should not be relied on for security.

Use an error logging tool, such as Sentry, as described in *Error Logging Tools*, or enable logging and notifications as described in *Logging*.

If you have access to the server, you could add some code to start an external debugger if `request.remote_addr` matches your IP. Some IDE debuggers also have a remote mode so breakpoints on the server can be interacted with locally. Only enable a debugger temporarily.

1.9.2 The Built-In Debugger

The built-in Werkzeug development server provides a debugger which shows an interactive traceback in the browser when an unhandled error occurs during a request. This debugger should only be used during development.

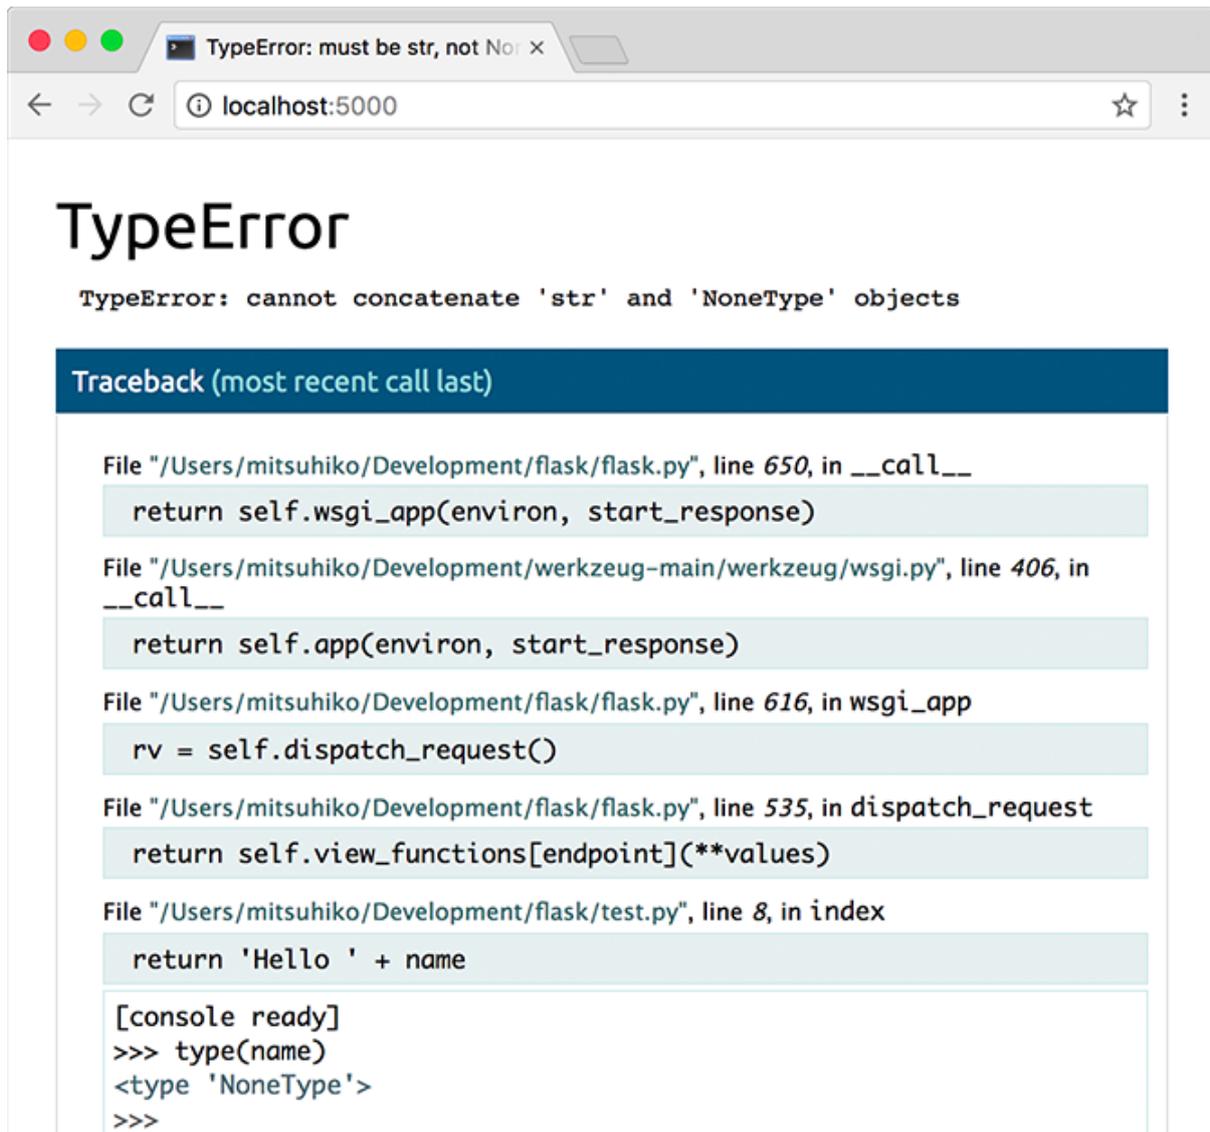

Warning: The debugger allows executing arbitrary Python code from the browser. It is protected by a pin, but still represents a major security risk. Do not run the development server or debugger in a production environment.

To enable the debugger, run the development server with the `FLASK_ENV` environment variable set to `development`. This puts Flask in debug mode, which changes how it handles some errors, and enables the debugger and reloader.

Bash

CMD

Powershell

```
$ export FLASK_ENV=development
$ flask run
```

```
> set FLASK_ENV=development
> flask run
```

```
> $env:FLASK_ENV = "development"
> flask run
```

FLASK_ENV can only be set as an environment variable. When running from Python code, passing `debug=True` enables debug mode, which is mostly equivalent. Debug mode can be controlled separately from FLASK_ENV with the FLASK_DEBUG environment variable as well.

```
app.run(debug=True)
```

Development Server and *Command Line Interface* have more information about running the debugger, debug mode, and development mode. More information about the debugger can be found in the [Werkzeug documentation](#).

1.9.3 External Debuggers

External debuggers, such as those provided by IDEs, can offer a more powerful debugging experience than the built-in debugger. They can also be used to step through code during a request before an error is raised, or if no error is raised. Some even have a remote mode so you can debug code running on another machine.

When using an external debugger, the app should still be in debug mode, but it can be useful to disable the built-in debugger and reloader, which can interfere.

When running from the command line:

Bash

CMD

Powershell

```
$ export FLASK_ENV=development
$ flask run --no-debugger --no-reload
```

```
> set FLASK_ENV=development
> flask run --no-debugger --no-reload
```

```
> $env:FLASK_ENV = "development"
> flask run --no-debugger --no-reload
```

When running from Python:

```
app.run(debug=True, use_debugger=False, use_reloader=False)
```

Disabling these isn't required, an external debugger will continue to work with the following caveats. If the built-in debugger is not disabled, it will catch unhandled exceptions before the external debugger can. If the reloader is not disabled, it could cause an unexpected reload if code changes during debugging.

1.10 Logging

Flask uses standard Python [logging](#). Messages about your Flask application are logged with `app.logger`, which takes the same name as `app.name`. This logger can also be used to log your own messages.

```
@app.route('/login', methods=['POST'])
def login():
    user = get_user(request.form['username'])

    if user.check_password(request.form['password']):
        login_user(user)
        app.logger.info('%s logged in successfully', user.username)
        return redirect(url_for('index'))
    else:
```

(continues on next page)

(continued from previous page)

```
app.logger.info('%s failed to log in', user.username)
abort(401)
```

If you don't configure logging, Python's default log level is usually 'warning'. Nothing below the configured level will be visible.

1.10.1 Basic Configuration

When you want to configure logging for your project, you should do it as soon as possible when the program starts. If `app.logger` is accessed before logging is configured, it will add a default handler. If possible, configure logging before creating the application object.

This example uses `dictConfig()` to create a logging configuration similar to Flask's default, except for all logs:

```
from logging.config import dictConfig

dictConfig({
    'version': 1,
    'formatters': {'default': {
        'format': '[%(asctime)s] %(levelname)s in %(module)s: %(message)s',
    }},
    'handlers': {'wsgi': {
        'class': 'logging.StreamHandler',
        'stream': 'ext://flask.logging.wsgi_errors_stream',
        'formatter': 'default'
    }},
    'root': {
        'level': 'INFO',
        'handlers': ['wsgi']
    }
})

app = Flask(__name__)
```

Default Configuration

If you do not configure logging yourself, Flask will add a `StreamHandler` to `app.logger` automatically. During requests, it will write to the stream specified by the WSGI server in `environ['wsgi.errors']` (which is usually `sys.stderr`). Outside a request, it will log to `sys.stderr`.

Removing the Default Handler

If you configured logging after accessing `app.logger`, and need to remove the default handler, you can import and remove it:

```
from flask.logging import default_handler

app.logger.removeHandler(default_handler)
```

1.10.2 Email Errors to Admins

When running the application on a remote server for production, you probably won't be looking at the log messages very often. The WSGI server will probably send log messages to a file, and you'll only check that file if a user tells you something went wrong.

To be proactive about discovering and fixing bugs, you can configure a `logging.handlers.SMTPHandler` to send an email when errors and higher are logged.

```
import logging
from logging.handlers import SMTPHandler

mail_handler = SMTPHandler(
    mailhost='127.0.0.1',
    fromaddr='server-error@example.com',
    toaddrs=['admin@example.com'],
    subject='Application Error'
)
mail_handler.setLevel(logging.ERROR)
mail_handler.setFormatter(logging.Formatter(
    '%(asctime)s %(levelname)s in %(module)s: %(message)s'
))

if not app.debug:
    app.logger.addHandler(mail_handler)
```

This requires that you have an SMTP server set up on the same server. See the Python docs for more information about configuring the handler.

1.10.3 Injecting Request Information

Seeing more information about the request, such as the IP address, may help debugging some errors. You can subclass `logging.Formatter` to inject your own fields that can be used in messages. You can change the formatter for Flask's default handler, the mail handler defined above, or any other handler.

```
from flask import has_request_context, request
from flask.logging import default_handler

class RequestFormatter(logging.Formatter):
    def format(self, record):
        if has_request_context():
            record.url = request.url
            record.remote_addr = request.remote_addr
        else:
            record.url = None
            record.remote_addr = None

        return super().format(record)

formatter = RequestFormatter(
    '%(asctime)s %(remote_addr)s requested %(url)s\n'
    '%(levelname)s in %(module)s: %(message)s'
)
default_handler.setFormatter(formatter)
mail_handler.setFormatter(formatter)
```

1.10.4 Other Libraries

Other libraries may use logging extensively, and you want to see relevant messages from those logs too. The simplest way to do this is to add handlers to the root logger instead of only the app logger.

```
from flask.logging import default_handler

root = logging.getLogger()
root.addHandler(default_handler)
root.addHandler(mail_handler)
```

Depending on your project, it may be more useful to configure each logger you care about separately, instead of configuring only the root logger.

```
for logger in (
    app.logger,
    logging.getLogger('sqlalchemy'),
    logging.getLogger('other_package'),
):
    logger.addHandler(default_handler)
    logger.addHandler(mail_handler)
```

Werkzeug

Werkzeug logs basic request/response information to the 'werkzeug' logger. If the root logger has no handlers configured, Werkzeug adds a `StreamHandler` to its logger.

Flask Extensions

Depending on the situation, an extension may choose to log to `app.logger` or its own named logger. Consult each extension's documentation for details.

1.11 Configuration Handling

Applications need some kind of configuration. There are different settings you might want to change depending on the application environment like toggling the debug mode, setting the secret key, and other such environment-specific things.

The way Flask is designed usually requires the configuration to be available when the application starts up. You can hard code the configuration in the code, which for many small applications is not actually that bad, but there are better ways.

Independent of how you load your config, there is a config object available which holds the loaded configuration values: The `config` attribute of the `Flask` object. This is the place where Flask itself puts certain configuration values and also where extensions can put their configuration values. But this is also where you can have your own configuration.

1.11.1 Configuration Basics

The `config` is actually a subclass of a dictionary and can be modified just like any dictionary:

```
app = Flask(__name__)
app.config['TESTING'] = True
```

Certain configuration values are also forwarded to the `Flask` object so you can read and write them from there:

```
app.testing = True
```

To update multiple keys at once you can use the `dict.update()` method:

```
app.config.update(
    TESTING=True,
    SECRET_KEY=b'_5#y2L"F4Q8z\n\xec]/'
)
```

1.11.2 Environment and Debug Features

The `ENV` and `DEBUG` config values are special because they may behave inconsistently if changed after the app has begun setting up. In order to set the environment and debug mode reliably, Flask uses environment variables.

The environment is used to indicate to Flask, extensions, and other programs, like Sentry, what context Flask is running in. It is controlled with the `FLASK_ENV` environment variable and defaults to `production`.

Setting `FLASK_ENV` to `development` will enable debug mode. `flask run` will use the interactive debugger and reloader by default in debug mode. To control this separately from the environment, use the `FLASK_DEBUG` flag.

Changed in version 1.0: Added `FLASK_ENV` to control the environment separately from debug mode. The `development` environment enables debug mode.

To switch Flask to the development environment and enable debug mode, set `FLASK_ENV`:

Bash

CMD

Powershell

```
$ export FLASK_ENV=development
$ flask run
```

```
> set FLASK_ENV=development
> flask run
```

```
> $env:FLASK_ENV = "development"
> flask run
```

Using the environment variables as described above is recommended. While it is possible to set `ENV` and `DEBUG` in your config or code, this is strongly discouraged. They can't be read early by the `flask` command, and some systems or extensions may have already configured themselves based on a previous value.

1.11.3 Builtin Configuration Values

The following configuration values are used internally by Flask:

ENV

What environment the app is running in. Flask and extensions may enable behaviors based on the environment, such as enabling debug mode. The `env` attribute maps to this config key. This is set by the `FLASK_ENV` environment variable and may not behave as expected if set in code.

Do not enable development when deploying in production.

Default: 'production'

New in version 1.0.

DEBUG

Whether debug mode is enabled. When using `flask run` to start the development server, an interactive debugger will be shown for unhandled exceptions, and the server will be reloaded when code changes. The `debug` attribute maps to this config key. This is enabled when `ENV` is 'development' and is overridden by the `FLASK_DEBUG` environment variable. It may not behave as expected if set in code.

Do not enable debug mode when deploying in production.

Default: True if `ENV` is 'development', or False otherwise.

TESTING

Enable testing mode. Exceptions are propagated rather than handled by the the app's error handlers. Extensions may also change their behavior to facilitate easier testing. You should enable this in your own tests.

Default: False

PROPAGATE_EXCEPTIONS

Exceptions are re-raised rather than being handled by the app's error handlers. If not set, this is implicitly true if `TESTING` or `DEBUG` is enabled.

Default: None

PRESERVE_CONTEXT_ON_EXCEPTION

Don't pop the request context when an exception occurs. If not set, this is true if `DEBUG` is true. This allows debuggers to introspect the request data on errors, and should normally not need to be set directly.

Default: None

TRAP_HTTP_EXCEPTIONS

If there is no handler for an `HTTPException`-type exception, re-raise it to be handled by the interactive debugger instead of returning it as a simple error response.

Default: False

TRAP_BAD_REQUEST_ERRORS

Trying to access a key that doesn't exist from request dicts like `args` and `form` will return a 400 Bad Request error page. Enable this to treat the error as an unhandled exception instead so that you get the interactive debugger. This is a more specific version of `TRAP_HTTP_EXCEPTIONS`. If unset, it is enabled in debug mode.

Default: None

SECRET_KEY

A secret key that will be used for securely signing the session cookie and can be used for any other security related needs by extensions or your application. It should be a long random bytes or `str`. For example, copy the output of this to your config:

```
$ python -c 'import os; print(os.urandom(16))'
b'_5#y2L"F4Q8z\n\xec]/'
```

Do not reveal the secret key when posting questions or committing code.

Default: None

SESSION_COOKIE_NAME

The name of the session cookie. Can be changed in case you already have a cookie with the same name.

Default: 'session'

SESSION_COOKIE_DOMAIN

The domain match rule that the session cookie will be valid for. If not set, the cookie will be valid for all subdomains of `SERVER_NAME`. If `False`, the cookie's domain will not be set.

Default: None

SESSION_COOKIE_PATH

The path that the session cookie will be valid for. If not set, the cookie will be valid underneath `APPLICATION_ROOT` or `/` if that is not set.

Default: None

SESSION_COOKIE_HTTPONLY

Browsers will not allow JavaScript access to cookies marked as “HTTP only” for security.

Default: True

SESSION_COOKIE_SECURE

Browsers will only send cookies with requests over HTTPS if the cookie is marked “secure”. The application must be served over HTTPS for this to make sense.

Default: False

SESSION_COOKIE_SAMESITE

Restrict how cookies are sent with requests from external sites. Can be set to 'Lax' (recommended) or 'Strict'. See *Set-Cookie options*.

Default: None

New in version 1.0.

PERMANENT_SESSION_LIFETIME

If `session.permanent` is true, the cookie's expiration will be set this number of seconds in the future. Can either be a `datetime.timedelta` or an `int`.

Flask's default cookie implementation validates that the cryptographic signature is not older than this value.

Default: `timedelta(days=31)` (2678400 seconds)

SESSION_REFRESH_EACH_REQUEST

Control whether the cookie is sent with every response when `session.permanent` is true. Sending the cookie every time (the default) can more reliably keep the session from expiring, but uses more bandwidth. Non-permanent sessions are not affected.

Default: True

USE_X_SENDFILE

When serving files, set the X-Sendfile header instead of serving the data with Flask. Some web servers, such as Apache, recognize this and serve the data more efficiently. This only makes sense when using such a server.

Default: False

SEND_FILE_MAX_AGE_DEFAULT

When serving files, set the cache control max age to this number of seconds. Can be a `datetime.timedelta` or an `int`. Override this value on a per-file basis using `get_send_file_max_age()` on the application or blueprint.

If None, `send_file` tells the browser to use conditional requests will be used instead of a timed cache, which is usually preferable.

Default: None

SERVER_NAME

Inform the application what host and port it is bound to. Required for subdomain route matching support.

If set, will be used for the session cookie domain if `SESSION_COOKIE_DOMAIN` is not set. Modern web browsers will not allow setting cookies for domains without a dot. To use a domain locally, add any names that should route to the app to your `hosts` file.

```
127.0.0.1 localhost.dev
```

If set, `url_for` can generate external URLs with only an application context instead of a request context.

Default: None

APPLICATION_ROOT

Inform the application what path it is mounted under by the application / web server. This is used for generating URLs outside the context of a request (inside a request, the dispatcher is responsible for setting `SCRIPT_NAME` instead; see *Application Dispatching* for examples of dispatch configuration).

Will be used for the session cookie path if `SESSION_COOKIE_PATH` is not set.

Default: '/'

PREFERRED_URL_SCHEME

Use this scheme for generating external URLs when not in a request context.

Default: 'http'

MAX_CONTENT_LENGTH

Don't read more than this many bytes from the incoming request data. If not set and the request does not specify a `CONTENT_LENGTH`, no data will be read for security.

Default: None

JSON_AS_ASCII

Serialize objects to ASCII-encoded JSON. If this is disabled, the JSON returned from `jsonify` will contain Unicode characters. This has security implications when rendering the JSON into JavaScript in templates, and should typically remain enabled.

Default: True

JSON_SORT_KEYS

Sort the keys of JSON objects alphabetically. This is useful for caching because it ensures the data is serialized the same way no matter what Python's hash seed is. While not recommended, you can disable this for a possible performance improvement at the cost of caching.

Default: True

JSONIFY_PRETTYPRINT_REGULAR

`jsonify` responses will be output with newlines, spaces, and indentation for easier reading by humans. Always enabled in debug mode.

Default: False

JSONIFY_MIMETYPE

The mimetype of `jsonify` responses.

Default: 'application/json'

TEMPLATES_AUTO_RELOAD

Reload templates when they are changed. If not set, it will be enabled in debug mode.

Default: None

EXPLAIN_TEMPLATE_LOADING

Log debugging information tracing how a template file was loaded. This can be useful to figure out why a template was not loaded or the wrong file appears to be loaded.

Default: False

MAX_COOKIE_SIZE

Warn if cookie headers are larger than this many bytes. Defaults to 4093. Larger cookies may be silently ignored by browsers. Set to 0 to disable the warning.

Changed in version 1.0: `LOGGER_NAME` and `LOGGER_HANDLER_POLICY` were removed. See [Logging](#) for information about configuration.

Added `ENV` to reflect the `FLASK_ENV` environment variable.

Added `SESSION_COOKIE_SAMESITE` to control the session cookie's SameSite option.

Added `MAX_COOKIE_SIZE` to control a warning from Werkzeug.

New in version 0.11: `SESSION_REFRESH_EACH_REQUEST`, `TEMPLATES_AUTO_RELOAD`, `LOGGER_HANDLER_POLICY`, `EXPLAIN_TEMPLATE_LOADING`

New in version 0.10: `JSON_AS_ASCII`, `JSON_SORT_KEYS`, `JSONIFY_PRETTYPRINT_REGULAR`

New in version 0.9: `PREFERRED_URL_SCHEME`

New in version 0.8: `TRAP_BAD_REQUEST_ERRORS`, `TRAP_HTTP_EXCEPTIONS`, `APPLICATION_ROOT`, `SESSION_COOKIE_DOMAIN`, `SESSION_COOKIE_PATH`, `SESSION_COOKIE_HTTPONLY`, `SESSION_COOKIE_SECURE`

New in version 0.7: `PROPAGATE_EXCEPTIONS`, `PRESERVE_CONTEXT_ON_EXCEPTION`

New in version 0.6: `MAX_CONTENT_LENGTH`

New in version 0.5: `SERVER_NAME`

New in version 0.4: `LOGGER_NAME`

1.11.4 Configuring from Python Files

Configuration becomes more useful if you can store it in a separate file, ideally located outside the actual application package. This makes packaging and distributing your application possible via various package handling tools ([Deploying with SetupTools](#)) and finally modifying the configuration file afterwards.

So a common pattern is this:

```
app = Flask(__name__)
app.config.from_object('yourapplication.default_settings')
app.config.from_envvar('YOURAPPLICATION_SETTINGS')
```

This first loads the configuration from the `yourapplication.default_settings` module and then overrides the values with the contents of the file the `YOURAPPLICATION_SETTINGS` environment variable points to. This environment variable can be set in the shell before starting the server:

Bash

CMD

Powershell

```
$ export YOURAPPLICATION_SETTINGS=/path/to/settings.cfg
$ flask run
* Running on http://127.0.0.1:5000/
```

```
> set YOURAPPLICATION_SETTINGS=\path\to\settings.cfg
> flask run
* Running on http://127.0.0.1:5000/
```

```
> $env:YOURAPPLICATION_SETTINGS = "\path\to\settings.cfg"
> flask run
* Running on http://127.0.0.1:5000/
```

The configuration files themselves are actual Python files. Only values in uppercase are actually stored in the config object later on. So make sure to use uppercase letters for your config keys.

Here is an example of a configuration file:

```
# Example configuration
SECRET_KEY = b'_5#y2L"F4Q8z\n\xec]/'
```

Make sure to load the configuration very early on, so that extensions have the ability to access the configuration when starting up. There are other methods on the config object as well to load from individual files. For a complete reference, read the [Config](#) object's documentation.

1.11.5 Configuring from Data Files

It is also possible to load configuration from a file in a format of your choice using `from_file()`. For example to load from a TOML file:

```
import toml
app.config.from_file("config.toml", load=toml.load)
```

Or from a JSON file:

```
import json
app.config.from_file("config.json", load=json.load)
```

1.11.6 Configuring from Environment Variables

In addition to pointing to configuration files using environment variables, you may find it useful (or necessary) to control your configuration values directly from the environment.

Environment variables can be set in the shell before starting the server:

Bash

CMD

Powershell

```
$ export SECRET_KEY="5f352379324c22463451387a0aec5d2f"
$ export MAIL_ENABLED=false
$ flask run
* Running on http://127.0.0.1:5000/
```

```
> set SECRET_KEY="5f352379324c22463451387a0aec5d2f"
> set MAIL_ENABLED=false
> flask run
* Running on http://127.0.0.1:5000/
```

```
> $env:SECRET_KEY = "5f352379324c22463451387a0aec5d2f"
> $env:MAIL_ENABLED = "false"
> flask run
* Running on http://127.0.0.1:5000/
```

While this approach is straightforward to use, it is important to remember that environment variables are strings – they are not automatically deserialized into Python types.

Here is an example of a configuration file that uses environment variables:

```
import os

_mail_enabled = os.environ.get("MAIL_ENABLED", default="true")
MAIL_ENABLED = _mail_enabled.lower() in {"1", "t", "true"}

SECRET_KEY = os.environ.get("SECRET_KEY")

if not SECRET_KEY:
    raise ValueError("No SECRET_KEY set for Flask application")
```

Notice that any value besides an empty string will be interpreted as a boolean `True` value in Python, which requires care if an environment explicitly sets values intended to be `False`.

Make sure to load the configuration very early on, so that extensions have the ability to access the configuration when starting up. There are other methods on the config object as well to load from individual files. For a complete reference, read the [Config](#) class documentation.

1.11.7 Configuration Best Practices

The downside with the approach mentioned earlier is that it makes testing a little harder. There is no single 100% solution for this problem in general, but there are a couple of things you can keep in mind to improve that experience:

1. Create your application in a function and register blueprints on it. That way you can create multiple instances of your application with different configurations attached which makes unit testing a lot easier. You can use this to pass in configuration as needed.
2. Do not write code that needs the configuration at import time. If you limit yourself to request-only accesses to the configuration you can reconfigure the object later on as needed.

1.11.8 Development / Production

Most applications need more than one configuration. There should be at least separate configurations for the production server and the one used during development. The easiest way to handle this is to use a default configuration that is always loaded and part of the version control, and a separate configuration that overrides the values as necessary as mentioned in the example above:

```
app = Flask(__name__)
app.config.from_object('yourapplication.default_settings')
app.config.from_envvar('YOURAPPLICATION_SETTINGS')
```

Then you just have to add a separate `config.py` file and export `YOURAPPLICATION_SETTINGS=/path/to/config.py` and you are done. However there are alternative ways as well. For example you could use imports or subclassing.

What is very popular in the Django world is to make the import explicit in the config file by adding `from yourapplication.default_settings import *` to the top of the file and then overriding the changes by hand. You could also inspect an environment variable like `YOURAPPLICATION_MODE` and set that to *production*, *development* etc and import different hard-coded files based on that.

An interesting pattern is also to use classes and inheritance for configuration:

```
class Config(object):
    TESTING = False

class ProductionConfig(Config):
    DATABASE_URI = 'mysql://user@localhost/fooo'

class DevelopmentConfig(Config):
```

(continues on next page)

(continued from previous page)

```

DATABASE_URI = "sqlite:///tmp/foo.db"

class TestingConfig(Config):
    DATABASE_URI = 'sqlite:///memory:'
    TESTING = True

```

To enable such a config you just have to call into `from_object()`:

```
app.config.from_object('configmodule.ProductionConfig')
```

Note that `from_object()` does not instantiate the class object. If you need to instantiate the class, such as to access a property, then you must do so before calling `from_object()`:

```

from configmodule import ProductionConfig
app.config.from_object(ProductionConfig())

# Alternatively, import via string:
from werkzeug.utils import import_string
cfg = import_string('configmodule.ProductionConfig')()
app.config.from_object(cfg)

```

Instantiating the configuration object allows you to use `@property` in your configuration classes:

```

class Config(object):
    """Base config, uses staging database server."""
    TESTING = False
    DB_SERVER = '192.168.1.56'

    @property
    def DATABASE_URI(self): # Note: all caps
        return f"mysql://user@{self.DB_SERVER}/foo"

class ProductionConfig(Config):
    """Uses production database server."""
    DB_SERVER = '192.168.19.32'

class DevelopmentConfig(Config):
    DB_SERVER = 'localhost'

class TestingConfig(Config):
    DB_SERVER = 'localhost'
    DATABASE_URI = 'sqlite:///memory:'

```

There are many different ways and it's up to you how you want to manage your configuration files. However here a list of good recommendations:

- Keep a default configuration in version control. Either populate the config with this default configuration or import it in your own configuration files before overriding values.
- Use an environment variable to switch between the configurations. This can be done from outside the Python interpreter and makes development and deployment much easier because you can quickly and easily switch between different configs without having to touch the code at all. If you are working often on different projects you can even create your own script for sourcing that activates a virtualenv and exports the development configuration for you.
- Use a tool like [fabric](#) in production to push code and configurations separately to the production server(s). For some details about how to do that, head over to the [Deploying with Fabric](#) pattern.

1.11.9 Instance Folders

New in version 0.8.

Flask 0.8 introduces instance folders. Flask for a long time made it possible to refer to paths relative to the application's folder directly (via `Flask.root_path`). This was also how many developers loaded configurations stored next to the application. Unfortunately however this only works well if applications are not packages in which case the root path refers to the contents of the package.

With Flask 0.8 a new attribute was introduced: `Flask.instance_path`. It refers to a new concept called the “instance folder”. The instance folder is designed to not be under version control and be deployment specific. It's the perfect place to drop things that either change at runtime or configuration files.

You can either explicitly provide the path of the instance folder when creating the Flask application or you can let Flask autodetect the instance folder. For explicit configuration use the `instance_path` parameter:

```
app = Flask(__name__, instance_path='/path/to/instance/folder')
```

Please keep in mind that this path *must* be absolute when provided.

If the `instance_path` parameter is not provided the following default locations are used:

- Uninstalled module:

```
/myapp.py
/instance
```

- Uninstalled package:

```
/myapp
  /__init__.py
/instance
```

- Installed module or package:

```
$PREFIX/lib/pythonX.Y/site-packages/myapp
$PREFIX/var/myapp-instance
```

`$PREFIX` is the prefix of your Python installation. This can be `/usr` or the path to your virtualenv. You can print the value of `sys.prefix` to see what the prefix is set to.

Since the config object provided loading of configuration files from relative filenames we made it possible to change the loading via filenames to be relative to the instance path if wanted. The behavior of relative paths in config files can be flipped between “relative to the application root” (the default) to “relative to instance folder” via the `instance_relative_config` switch to the application constructor:

```
app = Flask(__name__, instance_relative_config=True)
```

Here is a full example of how to configure Flask to preload the config from a module and then override the config from a file in the instance folder if it exists:

```
app = Flask(__name__, instance_relative_config=True)
app.config.from_object('yourapplication.default_settings')
app.config.from_pyfile('application.cfg', silent=True)
```

The path to the instance folder can be found via the `Flask.instance_path`. Flask also provides a shortcut to open a file from the instance folder with `Flask.open_instance_resource()`.

Example usage for both:

```
filename = os.path.join(app.instance_path, 'application.cfg')
with open(filename) as f:
```

(continues on next page)

(continued from previous page)

```
config = f.read()

# or via open_instance_resource:
with app.open_instance_resource('application.cfg') as f:
    config = f.read()
```

1.12 Signals

New in version 0.6.

Starting with Flask 0.6, there is integrated support for signalling in Flask. This support is provided by the excellent [blinker](#) library and will gracefully fall back if it is not available.

What are signals? Signals help you decouple applications by sending notifications when actions occur elsewhere in the core framework or another Flask extensions. In short, signals allow certain senders to notify subscribers that something happened.

Flask comes with a couple of signals and other extensions might provide more. Also keep in mind that signals are intended to notify subscribers and should not encourage subscribers to modify data. You will notice that there are signals that appear to do the same thing like some of the builtin decorators do (eg: `request_started` is very similar to `before_request()`). However, there are differences in how they work. The core `before_request()` handler, for example, is executed in a specific order and is able to abort the request early by returning a response. In contrast all signal handlers are executed in undefined order and do not modify any data.

The big advantage of signals over handlers is that you can safely subscribe to them for just a split second. These temporary subscriptions are helpful for unit testing for example. Say you want to know what templates were rendered as part of a request: signals allow you to do exactly that.

1.12.1 Subscribing to Signals

To subscribe to a signal, you can use the `connect()` method of a signal. The first argument is the function that should be called when the signal is emitted, the optional second argument specifies a sender. To unsubscribe from a signal, you can use the `disconnect()` method.

For all core Flask signals, the sender is the application that issued the signal. When you subscribe to a signal, be sure to also provide a sender unless you really want to listen for signals from all applications. This is especially true if you are developing an extension.

For example, here is a helper context manager that can be used in a unit test to determine which templates were rendered and what variables were passed to the template:

```
from flask import template_rendered
from contextlib import contextmanager

@contextmanager
def captured_templates(app):
    recorded = []
    def record(sender, template, context, **extra):
        recorded.append((template, context))
    template_rendered.connect(record, app)
    try:
        yield recorded
    finally:
        template_rendered.disconnect(record, app)
```

This can now easily be paired with a test client:

```
with captured_templates(app) as templates:
    rv = app.test_client().get('/')
    assert rv.status_code == 200
    assert len(templates) == 1
    template, context = templates[0]
    assert template.name == 'index.html'
    assert len(context['items']) == 10
```

Make sure to subscribe with an extra `**extra` argument so that your calls don't fail if Flask introduces new arguments to the signals.

All the template rendering in the code issued by the application `app` in the body of the `with` block will now be recorded in the `templates` variable. Whenever a template is rendered, the template object as well as context are appended to it.

Additionally there is a convenient helper method (`connected_to()`) that allows you to temporarily subscribe a function to a signal with a context manager on its own. Because the return value of the context manager cannot be specified that way, you have to pass the list in as an argument:

```
from flask import template_rendered

def captured_templates(app, recorded, **extra):
    def record(sender, template, context):
        recorded.append((template, context))
    return template_rendered.connected_to(record, app)
```

The example above would then look like this:

```
templates = []
with captured_templates(app, templates, **extra):
    ...
    template, context = templates[0]
```

Blinker API Changes

The `connected_to()` method arrived in Blinker with version 1.1.

1.12.2 Creating Signals

If you want to use signals in your own application, you can use the blinker library directly. The most common use case are named signals in a custom `Namespace`.. This is what is recommended most of the time:

```
from blinker import Namespace
my_signals = Namespace()
```

Now you can create new signals like this:

```
model_saved = my_signals.signal('model-saved')
```

The name for the signal here makes it unique and also simplifies debugging. You can access the name of the signal with the `name` attribute.

For Extension Developers

If you are writing a Flask extension and you want to gracefully degrade for missing blinker installations, you can do so by using the `flask.signals.Namespace` class.

1.12.3 Sending Signals

If you want to emit a signal, you can do so by calling the `send()` method. It accepts a sender as first argument and optionally some keyword arguments that are forwarded to the signal subscribers:

```
class Model(object):
    ...

    def save(self):
        model_saved.send(self)
```

Try to always pick a good sender. If you have a class that is emitting a signal, pass `self` as sender. If you are emitting a signal from a random function, you can pass `current_app._get_current_object()` as sender.

Passing Proxies as Senders

Never pass `current_app` as sender to a signal. Use `current_app._get_current_object()` instead. The reason for this is that `current_app` is a proxy and not the real application object.

1.12.4 Signals and Flask's Request Context

Signals fully support *The Request Context* when receiving signals. Context-local variables are consistently available between `request_started` and `request_finished`, so you can rely on `flask.g` and others as needed. Note the limitations described in *Sending Signals* and the `request_tearing_down` signal.

1.12.5 Decorator Based Signal Subscriptions

With Blinker 1.1 you can also easily subscribe to signals by using the new `connect_via()` decorator:

```
from flask import template_rendered

@template_rendered.connect_via(app)
def when_template_rendered(sender, template, context, **extra):
    print f'Template {template.name} is rendered with {context}'
```

1.12.6 Core Signals

Take a look at *Signals* for a list of all builtin signals.

1.13 Pluggable Views

New in version 0.7.

Flask 0.7 introduces pluggable views inspired by the generic views from Django which are based on classes instead of functions. The main intention is that you can replace parts of the implementations and this way have customizable pluggable views.

1.13.1 Basic Principle

Consider you have a function that loads a list of objects from the database and renders into a template:

```
@app.route('/users/')
def show_users(page):
    users = User.query.all()
    return render_template('users.html', users=users)
```

This is simple and flexible, but if you want to provide this view in a generic fashion that can be adapted to other models and templates as well you might want more flexibility. This is where pluggable class-based views come into place. As the first step to convert this into a class based view you would do this:

```
from flask.views import View

class ShowUsers(View):

    def dispatch_request(self):
        users = User.query.all()
        return render_template('users.html', objects=users)

app.add_url_rule('/users/', view_func=ShowUsers.as_view('show_users'))
```

As you can see what you have to do is to create a subclass of `flask.views.View` and implement `dispatch_request()`. Then we have to convert that class into an actual view function by using the `as_view()` class method. The string you pass to that function is the name of the endpoint that view will then have. But this by itself is not helpful, so let's refactor the code a bit:

```
from flask.views import View

class ListView(View):

    def get_template_name(self):
        raise NotImplementedError()

    def render_template(self, context):
        return render_template(self.get_template_name(), **context)

    def dispatch_request(self):
        context = {'objects': self.get_objects()}
        return self.render_template(context)

class UserView(ListView):

    def get_template_name(self):
        return 'users.html'

    def get_objects(self):
        return User.query.all()
```

This of course is not that helpful for such a small example, but it's good enough to explain the basic principle. When you have a class-based view the question comes up what `self` points to. The way this works is that whenever the request is dispatched a new instance of the class is created and the `dispatch_request()` method is called with the parameters from the URL rule. The class itself is instantiated with the parameters passed to the `as_view()` function. For instance you can write a class like this:

```
class RenderTemplateView(View):
    def __init__(self, template_name):
```

(continues on next page)

(continued from previous page)

```
self.template_name = template_name
def dispatch_request(self):
    return render_template(self.template_name)
```

And then you can register it like this:

```
app.add_url_rule('/about', view_func=RenderTemplateView.as_view(
    'about_page', template_name='about.html'))
```

1.13.2 Method Hints

Pluggable views are attached to the application like a regular function by either using `route()` or better `add_url_rule()`. That however also means that you would have to provide the names of the HTTP methods the view supports when you attach this. In order to move that information to the class you can provide a `methods` attribute that has this information:

```
class MyView(View):
    methods = ['GET', 'POST']

    def dispatch_request(self):
        if request.method == 'POST':
            ...
            ...

app.add_url_rule('/myview', view_func=MyView.as_view('myview'))
```

1.13.3 Method Based Dispatching

For RESTful APIs it's especially helpful to execute a different function for each HTTP method. With the `flask.views.MethodView` you can easily do that. Each HTTP method maps to a method of the class with the same name (just in lowercase):

```
from flask.views import MethodView

class UserAPI(MethodView):

    def get(self):
        users = User.query.all()
        ...

    def post(self):
        user = User.from_form_data(request.form)
        ...

app.add_url_rule('/users/', view_func=UserAPI.as_view('users'))
```

That way you also don't have to provide the `methods` attribute. It's automatically set based on the methods defined in the class.

1.13.4 Decorating Views

Since the view class itself is not the view function that is added to the routing system it does not make much sense to decorate the class itself. Instead you either have to decorate the return value of `as_view()` by hand:

```
def user_required(f):
    """Checks whether user is logged in or raises error 401."""
    def decorator(*args, **kwargs):
        if not g.user:
            abort(401)
        return f(*args, **kwargs)
    return decorator

view = user_required(UserAPI.as_view('users'))
app.add_url_rule('/users/', view_func=view)
```

Starting with Flask 0.8 there is also an alternative way where you can specify a list of decorators to apply in the class declaration:

```
class UserAPI(MethodView):
    decorators = [user_required]
```

Due to the implicit self from the caller's perspective you cannot use regular view decorators on the individual methods of the view however, keep this in mind.

1.13.5 Method Views for APIs

Web APIs are often working very closely with HTTP verbs so it makes a lot of sense to implement such an API based on the `MethodView`. That said, you will notice that the API will require different URL rules that go to the same method view most of the time. For instance consider that you are exposing a user object on the web:

URL	Method	Description
/users/	GET	Gives a list of all users
/users/	POST	Creates a new user
/users/<id>	GET	Shows a single user
/users/<id>	PUT	Updates a single user
/users/<id>	DELETE	Deletes a single user

So how would you go about doing that with the `MethodView`? The trick is to take advantage of the fact that you can provide multiple rules to the same view.

Let's assume for the moment the view would look like this:

```
class UserAPI(MethodView):

    def get(self, user_id):
        if user_id is None:
            # return a list of users
            pass
        else:
            # expose a single user
            pass

    def post(self):
        # create a new user
        pass
```

(continues on next page)

(continued from previous page)

```
def delete(self, user_id):
    # delete a single user
    pass

def put(self, user_id):
    # update a single user
    pass
```

So how do we hook this up with the routing system? By adding two rules and explicitly mentioning the methods for each:

```
user_view = UserAPI.as_view('user_api')
app.add_url_rule('/users/', defaults={'user_id': None},
                 view_func=user_view, methods=['GET',])
app.add_url_rule('/users/', view_func=user_view, methods=['POST',])
app.add_url_rule('/users/<int:user_id>', view_func=user_view,
                 methods=['GET', 'PUT', 'DELETE'])
```

If you have a lot of APIs that look similar you can refactor that registration code:

```
def register_api(view, endpoint, url, pk='id', pk_type='int'):
    view_func = view.as_view(endpoint)
    app.add_url_rule(url, defaults={pk: None},
                    view_func=view_func, methods=['GET',])
    app.add_url_rule(url, view_func=view_func, methods=['POST',])
    app.add_url_rule(f'{url}<{pk_type}:{pk}>', view_func=view_func,
                    methods=['GET', 'PUT', 'DELETE'])

register_api(UserAPI, 'user_api', '/users/', pk='user_id')
```

1.14 The Application Context

The application context keeps track of the application-level data during a request, CLI command, or other activity. Rather than passing the application around to each function, the `current_app` and `g` proxies are accessed instead.

This is similar to *The Request Context*, which keeps track of request-level data during a request. A corresponding application context is pushed when a request context is pushed.

1.14.1 Purpose of the Context

The *Flask* application object has attributes, such as `config`, that are useful to access within views and *CLI commands*. However, importing the app instance within the modules in your project is prone to circular import issues. When using the *app factory pattern* or writing reusable *blueprints* or *extensions* there won't be an app instance to import at all.

Flask solves this issue with the *application context*. Rather than referring to an app directly, you use the `current_app` proxy, which points to the application handling the current activity.

Flask automatically *pushes* an application context when handling a request. View functions, error handlers, and other functions that run during a request will have access to `current_app`.

Flask will also automatically push an app context when running CLI commands registered with `Flask.cli` using `@app.cli.command()`.

1.14.2 Lifetime of the Context

The application context is created and destroyed as necessary. When a Flask application begins handling a request, it pushes an application context and a *request context*. When the request ends it pops the request context then the application context. Typically, an application context will have the same lifetime as a request.

See *The Request Context* for more information about how the contexts work and the full life cycle of a request.

1.14.3 Manually Push a Context

If you try to access `current_app`, or anything that uses it, outside an application context, you'll get this error message:

```
RuntimeError: Working outside of application context.
```

This typically means that you attempted to use functionality that needed to interface with the current application object in some way. To solve this, set up an application context with `app.app_context()`.

If you see that error while configuring your application, such as when initializing an extension, you can push a context manually since you have direct access to the app. Use `app_context()` in a `with` block, and everything that runs in the block will have access to `current_app`.

```
def create_app():
    app = Flask(__name__)

    with app.app_context():
        init_db()

    return app
```

If you see that error somewhere else in your code not related to configuring the application, it most likely indicates that you should move that code into a view function or CLI command.

1.14.4 Storing Data

The application context is a good place to store common data during a request or CLI command. Flask provides the *g object* for this purpose. It is a simple namespace object that has the same lifetime as an application context.

Note: The *g* name stands for “global”, but that is referring to the data being global *within a context*. The data on *g* is lost after the context ends, and it is not an appropriate place to store data between requests. Use the *session* or a database to store data across requests.

A common use for *g* is to manage resources during a request.

1. `get_X()` creates resource *X* if it does not exist, caching it as `g.X`.
2. `teardown_X()` closes or otherwise deallocates the resource if it exists. It is registered as a `teardown_appcontext()` handler.

For example, you can manage a database connection using this pattern:

```
from flask import g

def get_db():
    if 'db' not in g:
        g.db = connect_to_database()
```

(continues on next page)

(continued from previous page)

```
    return g.db

@app.teardown_appcontext
def teardown_db(exception):
    db = g.pop('db', None)

    if db is not None:
        db.close()
```

During a request, every call to `get_db()` will return the same connection, and it will be closed automatically at the end of the request.

You can use `LocalProxy` to make a new context local from `get_db()`:

```
from werkzeug.local import LocalProxy
db = LocalProxy(get_db)
```

Accessing `db` will call `get_db` internally, in the same way that `current_app` works.

If you're writing an extension, `g` should be reserved for user code. You may store internal data on the context itself, but be sure to use a sufficiently unique name. The current context is accessed with `_app_ctx_stack.top`. For more information see *Flask Extension Development*.

1.14.5 Events and Signals

The application will call functions registered with `teardown_appcontext()` when the application context is popped.

If `signals_available` is true, the following signals are sent: `appcontext_pushed`, `appcontext_tearing_down`, and `appcontext_popped`.

1.15 The Request Context

The request context keeps track of the request-level data during a request. Rather than passing the request object to each function that runs during a request, the `request` and `session` proxies are accessed instead.

This is similar to *The Application Context*, which keeps track of the application-level data independent of a request. A corresponding application context is pushed when a request context is pushed.

1.15.1 Purpose of the Context

When the *Flask* application handles a request, it creates a `Request` object based on the environment it received from the WSGI server. Because a *worker* (thread, process, or coroutine depending on the server) handles only one request at a time, the request data can be considered global to that worker during that request. Flask uses the term *context local* for this.

Flask automatically *pushes* a request context when handling a request. View functions, error handlers, and other functions that run during a request will have access to the `request` proxy, which points to the request object for the current request.

1.15.2 Lifetime of the Context

When a Flask application begins handling a request, it pushes a request context, which also pushes an *app context*. When the request ends it pops the request context then the application context.

The context is unique to each thread (or other worker type). *request* cannot be passed to another thread, the other thread will have a different context stack and will not know about the request the parent thread was pointing to.

Context locals are implemented in Werkzeug. See [Context Locals](#) for more information on how this works internally.

1.15.3 Manually Push a Context

If you try to access *request*, or anything that uses it, outside a request context, you'll get this error message:

```
RuntimeError: Working outside of request context.
```

This typically means that you attempted to use functionality that needed an active HTTP request. Consult the documentation on testing for information about how to avoid this problem.

This should typically only happen when testing code that expects an active request. One option is to use the *test client* to simulate a full request. Or you can use *test_request_context()* in a with block, and everything that runs in the block will have access to *request*, populated with your test data.

```
def generate_report(year):
    format = request.args.get('format')
    ...

with app.test_request_context(
    '/make_report/2017', data={'format': 'short'}):
    generate_report()
```

If you see that error somewhere else in your code not related to testing, it most likely indicates that you should move that code into a view function.

For information on how to use the request context from the interactive Python shell, see [Working with the Shell](#).

1.15.4 How the Context Works

The *Flask.wsgi_app()* method is called to handle each request. It manages the contexts during the request. Internally, the request and application contexts work as stacks, *_request_ctx_stack* and *_app_ctx_stack*. When contexts are pushed onto the stack, the proxies that depend on them are available and point at information from the top context on the stack.

When the request starts, a *RequestContext* is created and pushed, which creates and pushes an *AppContext* first if a context for that application is not already the top context. While these contexts are pushed, the *current_app*, *g*, *request*, and *session* proxies are available to the original thread handling the request.

Because the contexts are stacks, other contexts may be pushed to change the proxies during a request. While this is not a common pattern, it can be used in advanced applications to, for example, do internal redirects or chain different applications together.

After the request is dispatched and a response is generated and sent, the request context is popped, which then pops the application context. Immediately before they are popped, the *teardown_request()* and *teardown_appcontext()* functions are executed. These execute even if an unhandled exception occurred during dispatch.

1.15.5 Callbacks and Errors

Flask dispatches a request in multiple stages which can affect the request, response, and how errors are handled. The contexts are active during all of these stages.

A *Blueprint* can add handlers for these events that are specific to the blueprint. The handlers for a blueprint will run if the blueprint owns the route that matches the request.

1. Before each request, *before_request()* functions are called. If one of these functions return a value, the other functions are skipped. The return value is treated as the response and the view function is not called.
2. If the *before_request()* functions did not return a response, the view function for the matched route is called and returns a response.
3. The return value of the view is converted into an actual response object and passed to the *after_request()* functions. Each function returns a modified or new response object.
4. After the response is returned, the contexts are popped, which calls the *teardown_request()* and *teardown_appcontext()* functions. These functions are called even if an unhandled exception was raised at any point above.

If an exception is raised before the teardown functions, Flask tries to match it with an *errorhandler()* function to handle the exception and return a response. If no error handler is found, or the handler itself raises an exception, Flask returns a generic `500 Internal Server Error` response. The teardown functions are still called, and are passed the exception object.

If debug mode is enabled, unhandled exceptions are not converted to a `500` response and instead are propagated to the WSGI server. This allows the development server to present the interactive debugger with the traceback.

Teardown Callbacks

The teardown callbacks are independent of the request dispatch, and are instead called by the contexts when they are popped. The functions are called even if there is an unhandled exception during dispatch, and for manually pushed contexts. This means there is no guarantee that any other parts of the request dispatch have run first. Be sure to write these functions in a way that does not depend on other callbacks and will not fail.

During testing, it can be useful to defer popping the contexts after the request ends, so that their data can be accessed in the test function. Use the *test_client()* as a `with` block to preserve the contexts until the `with` block exits.

```
from flask import Flask, request

app = Flask(__name__)

@app.route('/')
def hello():
    print('during view')
    return 'Hello, World!'

@app.teardown_request
def show_teardown(exception):
    print('after with block')

with app.test_request_context():
    print('during with block')

# teardown functions are called after the context with block exits

with app.test_client() as client:
    client.get('/')
    # the contexts are not popped even though the request ended
    print(request.path)
```

(continues on next page)

```
# the contexts are popped and teardown functions are called after  
# the client with block exits
```

Signals

If `signals_available` is true, the following signals are sent:

1. `request_started` is sent before the `before_request()` functions are called.
2. `request_finished` is sent after the `after_request()` functions are called.
3. `got_request_exception` is sent when an exception begins to be handled, but before an `errorhandler()` is looked up or called.
4. `request_tearing_down` is sent after the `teardown_request()` functions are called.

1.15.6 Context Preservation on Error

At the end of a request, the request context is popped and all data associated with it is destroyed. If an error occurs during development, it is useful to delay destroying the data for debugging purposes.

When the development server is running in development mode (the `FLASK_ENV` environment variable is set to 'development'), the error and data will be preserved and shown in the interactive debugger.

This behavior can be controlled with the `PRESERVE_CONTEXT_ON_EXCEPTION` config. As described above, it defaults to `True` in the development environment.

Do not enable `PRESERVE_CONTEXT_ON_EXCEPTION` in production, as it will cause your application to leak memory on exceptions.

1.15.7 Notes On Proxies

Some of the objects provided by Flask are proxies to other objects. The proxies are accessed in the same way for each worker thread, but point to the unique object bound to each worker behind the scenes as described on this page.

Most of the time you don't have to care about that, but there are some exceptions where it is good to know that this object is actually a proxy:

- The proxy objects cannot fake their type as the actual object types. If you want to perform instance checks, you have to do that on the object being proxied.
- The reference to the proxied object is needed in some situations, such as sending *Signals* or passing data to a background thread.

If you need to access the underlying object that is proxied, use the `_get_current_object()` method:

```
app = current_app._get_current_object()  
my_signal.send(app)
```

1.16 Modular Applications with Blueprints

New in version 0.7.

Flask uses a concept of *blueprints* for making application components and supporting common patterns within an application or across applications. Blueprints can greatly simplify how large applications work and provide a central means for Flask extensions to register operations on applications. A *Blueprint* object works similarly to a *Flask* application object, but it is not actually an application. Rather it is a *blueprint* of how to construct or extend an application.

1.16.1 Why Blueprints?

Blueprints in Flask are intended for these cases:

- Factor an application into a set of blueprints. This is ideal for larger applications; a project could instantiate an application object, initialize several extensions, and register a collection of blueprints.
- Register a blueprint on an application at a URL prefix and/or subdomain. Parameters in the URL prefix/subdomain become common view arguments (with defaults) across all view functions in the blueprint.
- Register a blueprint multiple times on an application with different URL rules.
- Provide template filters, static files, templates, and other utilities through blueprints. A blueprint does not have to implement applications or view functions.
- Register a blueprint on an application for any of these cases when initializing a Flask extension.

A blueprint in Flask is not a pluggable app because it is not actually an application – it's a set of operations which can be registered on an application, even multiple times. Why not have multiple application objects? You can do that (see *Application Dispatching*), but your applications will have separate configs and will be managed at the WSGI layer.

Blueprints instead provide separation at the Flask level, share application config, and can change an application object as necessary with being registered. The downside is that you cannot unregister a blueprint once an application was created without having to destroy the whole application object.

1.16.2 The Concept of Blueprints

The basic concept of blueprints is that they record operations to execute when registered on an application. Flask associates view functions with blueprints when dispatching requests and generating URLs from one endpoint to another.

1.16.3 My First Blueprint

This is what a very basic blueprint looks like. In this case we want to implement a blueprint that does simple rendering of static templates:

```
from flask import Blueprint, render_template, abort
from jinja2 import TemplateNotFound

simple_page = Blueprint('simple_page', __name__,
                       template_folder='templates')

@simple_page.route('/', defaults={'page': 'index'})
@simple_page.route('/<page>')
def show(page):
    try:
        return render_template(f'pages/{page}.html')
```

(continues on next page)

```
except TemplateNotFound:
    abort(404)
```

When you bind a function with the help of the `@simple_page.route` decorator, the blueprint will record the intention of registering the function `show` on the application when it's later registered. Additionally it will prefix the endpoint of the function with the name of the blueprint which was given to the `Blueprint` constructor (in this case also `simple_page`). The blueprint's name does not modify the URL, only the endpoint.

1.16.4 Registering Blueprints

So how do you register that blueprint? Like this:

```
from flask import Flask
from yourapplication.simple_page import simple_page

app = Flask(__name__)
app.register_blueprint(simple_page)
```

If you check the rules registered on the application, you will find these:

```
>>> app.url_map
Map([<Rule '/static/<filename>' (HEAD, OPTIONS, GET) -> static>,
 <Rule '/<page>' (HEAD, OPTIONS, GET) -> simple_page.show>,
 <Rule '/' (HEAD, OPTIONS, GET) -> simple_page.show>])
```

The first one is obviously from the application itself for the static files. The other two are for the `show` function of the `simple_page` blueprint. As you can see, they are also prefixed with the name of the blueprint and separated by a dot (`.`).

Blueprints however can also be mounted at different locations:

```
app.register_blueprint(simple_page, url_prefix='/pages')
```

And sure enough, these are the generated rules:

```
>>> app.url_map
Map([<Rule '/static/<filename>' (HEAD, OPTIONS, GET) -> static>,
 <Rule '/pages/<page>' (HEAD, OPTIONS, GET) -> simple_page.show>,
 <Rule '/pages/' (HEAD, OPTIONS, GET) -> simple_page.show>])
```

On top of that you can register blueprints multiple times though not every blueprint might respond properly to that. In fact it depends on how the blueprint is implemented if it can be mounted more than once.

1.16.5 Nesting Blueprints

It is possible to register a blueprint on another blueprint.

```
parent = Blueprint('parent', __name__, url_prefix='/parent')
child = Blueprint('child', __name__, url_prefix='/child')
parent.register_blueprint(child)
app.register_blueprint(parent)
```

The child blueprint will gain the parent's name as a prefix to its name, and child URLs will be prefixed with the parent's URL prefix.

```
url_for('parent.child.create')
/parent/child/create
```

Blueprint-specific before request functions, etc. registered with the parent will trigger for the child. If a child does not have an error handler that can handle a given exception, the parent's will be tried.

1.16.6 Blueprint Resources

Blueprints can provide resources as well. Sometimes you might want to introduce a blueprint only for the resources it provides.

Blueprint Resource Folder

Like for regular applications, blueprints are considered to be contained in a folder. While multiple blueprints can originate from the same folder, it does not have to be the case and it's usually not recommended.

The folder is inferred from the second argument to *Blueprint* which is usually `__name__`. This argument specifies what logical Python module or package corresponds to the blueprint. If it points to an actual Python package that package (which is a folder on the filesystem) is the resource folder. If it's a module, the package the module is contained in will be the resource folder. You can access the *Blueprint.root_path* property to see what the resource folder is:

```
>>> simple_page.root_path
'/Users/username/TestProject/yourapplication'
```

To quickly open sources from this folder you can use the *open_resource()* function:

```
with simple_page.open_resource('static/style.css') as f:
    code = f.read()
```

Static Files

A blueprint can expose a folder with static files by providing the path to the folder on the filesystem with the *static_folder* argument. It is either an absolute path or relative to the blueprint's location:

```
admin = Blueprint('admin', __name__, static_folder='static')
```

By default the rightmost part of the path is where it is exposed on the web. This can be changed with the *static_url_path* argument. Because the folder is called *static* here it will be available at the *url_prefix* of the blueprint + */static*. If the blueprint has the prefix */admin*, the static URL will be */admin/static*.

The endpoint is named *blueprint_name.static*. You can generate URLs to it with *url_for()* like you would with the static folder of the application:

```
url_for('admin.static', filename='style.css')
```

However, if the blueprint does not have a *url_prefix*, it is not possible to access the blueprint's static folder. This is because the URL would be */static* in this case, and the application's */static* route takes precedence. Unlike template folders, blueprint static folders are not searched if the file does not exist in the application static folder.

Templates

If you want the blueprint to expose templates you can do that by providing the `template_folder` parameter to the `Blueprint` constructor:

```
admin = Blueprint('admin', __name__, template_folder='templates')
```

For static files, the path can be absolute or relative to the blueprint resource folder.

The template folder is added to the search path of templates but with a lower priority than the actual application's template folder. That way you can easily override templates that a blueprint provides in the actual application. This also means that if you don't want a blueprint template to be accidentally overridden, make sure that no other blueprint or actual application template has the same relative path. When multiple blueprints provide the same relative template path the first blueprint registered takes precedence over the others.

So if you have a blueprint in the folder `yourapplication/admin` and you want to render the template `'admin/index.html'` and you have provided `templates` as a `template_folder` you will have to create a file like this: `yourapplication/admin/templates/admin/index.html`. The reason for the extra `admin` folder is to avoid getting our template overridden by a template named `index.html` in the actual application template folder.

To further reiterate this: if you have a blueprint named `admin` and you want to render a template called `index.html` which is specific to this blueprint, the best idea is to lay out your templates like this:

```
yourpackage/  
  blueprints/  
    admin/  
      templates/  
        admin/  
          index.html  
      __init__.py
```

And then when you want to render the template, use `admin/index.html` as the name to look up the template by. If you encounter problems loading the correct templates enable the `EXPLAIN_TEMPLATE_LOADING` config variable which will instruct Flask to print out the steps it goes through to locate templates on every `render_template` call.

1.16.7 Building URLs

If you want to link from one page to another you can use the `url_for()` function just like you normally would do just that you prefix the URL endpoint with the name of the blueprint and a dot (`.`):

```
url_for('admin.index')
```

Additionally if you are in a view function of a blueprint or a rendered template and you want to link to another endpoint of the same blueprint, you can use relative redirects by prefixing the endpoint with a dot only:

```
url_for('.index')
```

This will link to `admin.index` for instance in case the current request was dispatched to any other admin blueprint endpoint.

1.16.8 Blueprint Error Handlers

Blueprints support the `errorhandler` decorator just like the *Flask* application object, so it is easy to make Blueprint-specific custom error pages.

Here is an example for a “404 Page Not Found” exception:

```
@simple_page.errorhandler(404)
def page_not_found(e):
    return render_template('pages/404.html')
```

Most errorhandlers will simply work as expected; however, there is a caveat concerning handlers for 404 and 405 exceptions. These errorhandlers are only invoked from an appropriate `raise` statement or a call to `abort` in another of the blueprint’s view functions; they are not invoked by, e.g., an invalid URL access. This is because the blueprint does not “own” a certain URL space, so the application instance has no way of knowing which blueprint error handler it should run if given an invalid URL. If you would like to execute different handling strategies for these errors based on URL prefixes, they may be defined at the application level using the `request proxy` object:

```
@app.errorhandler(404)
@app.errorhandler(405)
def _handle_api_error(ex):
    if request.path.startswith('/api/'):
        return jsonify(error=str(ex)), ex.code
    else:
        return ex
```

See *Handling Application Errors*.

1.17 Extensions

Extensions are extra packages that add functionality to a Flask application. For example, an extension might add support for sending email or connecting to a database. Some extensions add entire new frameworks to help build certain types of applications, like a REST API.

1.17.1 Finding Extensions

Flask extensions are usually named “Flask-Foo” or “Foo-Flask”. You can search PyPI for packages tagged with `Framework :: Flask`.

1.17.2 Using Extensions

Consult each extension’s documentation for installation, configuration, and usage instructions. Generally, extensions pull their own configuration from `app.config` and are passed an application instance during initialization. For example, an extension called “Flask-Foo” might be used like this:

```
from flask_foo import Foo

foo = Foo()

app = Flask(__name__)
app.config.update(
    FOO_BAR='baz',
    FOO_SPAM='eggs',
)

foo.init_app(app)
```

1.17.3 Building Extensions

While the [PyPI](#) contains many Flask extensions, you may not find an extension that fits your need. If this is the case, you can create your own. Read *Flask Extension Development* to develop your own Flask extension.

1.18 Command Line Interface

Installing Flask installs the `flask` script, a [Click](#) command line interface, in your virtualenv. Executed from the terminal, this script gives access to built-in, extension, and application-defined commands. The `--help` option will give more information about any commands and options.

1.18.1 Application Discovery

The `flask` command is installed by Flask, not your application; it must be told where to find your application in order to use it. The `FLASK_APP` environment variable is used to specify how to load the application.

Bash

CMD

Powershell

```
$ export FLASK_APP=hello
$ flask run
```

```
> set FLASK_APP=hello
> flask run
```

```
> $env:FLASK_APP = "hello"
> flask run
```

While `FLASK_APP` supports a variety of options for specifying your application, most use cases should be simple. Here are the typical values:

(nothing) The name “`app`” or “`wsgi`” is imported (as a “.py” file, or package), automatically detecting an app (`app` or `application`) or factory (`create_app` or `make_app`).

`FLASK_APP=hello` The given name is imported, automatically detecting an app (`app` or `application`) or factory (`create_app` or `make_app`).

`FLASK_APP` has three parts: an optional path that sets the current working directory, a Python file or dotted import path, and an optional variable name of the instance or factory. If the name is a factory, it can optionally be followed by arguments in parentheses. The following values demonstrate these parts:

`FLASK_APP=src/hello` Sets the current working directory to `src` then imports `hello`.

`FLASK_APP=hello.web` Imports the path `hello.web`.

`FLASK_APP=hello:app2` Uses the `app2` Flask instance in `hello`.

`FLASK_APP="hello:create_app('dev')"` The `create_app` factory in `hello` is called with the string `'dev'` as the argument.

If `FLASK_APP` is not set, the command will try to import “`app`” or “`wsgi`” (as a “.py” file, or package) and try to detect an application instance or factory.

Within the given import, the command looks for an application instance named `app` or `application`, then any application instance. If no instance is found, the command looks for a factory function named `create_app` or `make_app` that returns an instance.

If parentheses follow the factory name, their contents are parsed as Python literals and passed as arguments and keyword arguments to the function. This means that strings must still be in quotes.

1.18.2 Run the Development Server

The `run` command will start the development server. It replaces the `Flask.run()` method in most cases.

```
$ flask run
* Serving Flask app "hello"
* Running on http://127.0.0.1:5000/ (Press CTRL+C to quit)
```

Warning: Do not use this command to run your application in production. Only use the development server during development. The development server is provided for convenience, but is not designed to be particularly secure, stable, or efficient. See [Deployment Options](#) for how to run in production.

1.18.3 Open a Shell

To explore the data in your application, you can start an interactive Python shell with the `shell` command. An application context will be active, and the app instance will be imported.

```
$ flask shell
Python 3.6.2 (default, Jul 20 2017, 03:52:27)
[GCC 7.1.1 20170630] on linux
App: example
Instance: /home/user/Projects/hello/instance
>>>
```

Use `shell_context_processor()` to add other automatic imports.

1.18.4 Environments

New in version 1.0.

The environment in which the Flask app runs is set by the `FLASK_ENV` environment variable. If not set it defaults to production. The other recognized environment is development. Flask and extensions may choose to enable behaviors based on the environment.

If the env is set to development, the `flask` command will enable debug mode and `flask run` will enable the interactive debugger and reloader.

Bash

CMD

Powershell

```
$ export FLASK_ENV=development
$ flask run
* Serving Flask app "hello"
* Environment: development
* Debug mode: on
* Running on http://127.0.0.1:5000/ (Press CTRL+C to quit)
* Restarting with inotify reloader
* Debugger is active!
* Debugger PIN: 223-456-919
```

```
> set FLASK_ENV=development
> flask run
* Serving Flask app "hello"
* Environment: development
* Debug mode: on
* Running on http://127.0.0.1:5000/ (Press CTRL+C to quit)
* Restarting with inotify reloader
* Debugger is active!
* Debugger PIN: 223-456-919
```

```
> $env:FLASK_ENV = "development"
> flask run
* Serving Flask app "hello"
* Environment: development
* Debug mode: on
* Running on http://127.0.0.1:5000/ (Press CTRL+C to quit)
* Restarting with inotify reloader
* Debugger is active!
* Debugger PIN: 223-456-919
```

Watch Extra Files with the Reloader

When using development mode, the reloader will trigger whenever your Python code or imported modules change. The reloader can watch additional files with the `--extra-files` option, or the `FLASK_RUN_EXTRA_FILES` environment variable. Multiple paths are separated with `:`, or `;` on Windows.

Bash

CMD

Powershell

```
$ flask run --extra-files file1:dirA/file2:dirB/
# or
$ export FLASK_RUN_EXTRA_FILES=file1:dirA/file2:dirB/
$ flask run
* Running on http://127.0.0.1:8000/
* Detected change in '/path/to/file1', reloading
```

```
> flask run --extra-files file1:dirA/file2:dirB/
# or
> set FLASK_RUN_EXTRA_FILES=file1:dirA/file2:dirB/
> flask run
* Running on http://127.0.0.1:8000/
* Detected change in '/path/to/file1', reloading
```

```
> flask run --extra-files file1:dirA/file2:dirB/
# or
> $env:FLASK_RUN_EXTRA_FILES = "file1:dirA/file2:dirB/"
> flask run
* Running on http://127.0.0.1:8000/
* Detected change in '/path/to/file1', reloading
```

1.18.5 Debug Mode

Debug mode will be enabled when `FLASK_ENV` is `development`, as described above. If you want to control debug mode separately, use `FLASK_DEBUG`. The value `1` enables it, `0` disables it.

1.18.6 Environment Variables From dotenv

Rather than setting `FLASK_APP` each time you open a new terminal, you can use Flask's `dotenv` support to set environment variables automatically.

If `python-dotenv` is installed, running the `flask` command will set environment variables defined in the files `.env` and `.flaskenv`. This can be used to avoid having to set `FLASK_APP` manually every time you open a new terminal, and to set configuration using environment variables similar to how some deployment services work.

Variables set on the command line are used over those set in `.env`, which are used over those set in `.flaskenv`. `.flaskenv` should be used for public variables, such as `FLASK_APP`, while `.env` should not be committed to your repository so that it can set private variables.

Directories are scanned upwards from the directory you call `flask` from to locate the files. The current working directory will be set to the location of the file, with the assumption that that is the top level project directory.

The files are only loaded by the `flask` command or calling `run()`. If you would like to load these files when running in production, you should call `load_dotenv()` manually.

Setting Command Options

Click is configured to load default values for command options from environment variables. The variables use the pattern `FLASK_COMMAND_OPTION`. For example, to set the port for the `run` command, instead of `flask run --port 8000`:

Bash

CMD

Powershell

```
$ export FLASK_RUN_PORT=8000
$ flask run
* Running on http://127.0.0.1:8000/
```

```
> set FLASK_RUN_PORT=8000
> flask run
* Running on http://127.0.0.1:8000/
```

```
> $env:FLASK_RUN_PORT = 8000
> flask run
* Running on http://127.0.0.1:8000/
```

These can be added to the `.flaskenv` file just like `FLASK_APP` to control default command options.

Disable dotenv

The flask command will show a message if it detects dotenv files but python-dotenv is not installed.

```
$ flask run
* Tip: There are .env files present. Do "pip install python-dotenv" to use them.
```

You can tell Flask not to load dotenv files even when python-dotenv is installed by setting the `FLASK_SKIP_DOTENV` environment variable. This can be useful if you want to load them manually, or if you're using a project runner that loads them already. Keep in mind that the environment variables must be set before the app loads or it won't configure as expected.

Bash

CMD

Powershell

```
$ export FLASK_SKIP_DOTENV=1
$ flask run
```

```
> set FLASK_SKIP_DOTENV=1
> flask run
```

```
> $env:FLASK_SKIP_DOTENV = 1
> flask run
```

1.18.7 Environment Variables From virtualenv

If you do not want to install dotenv support, you can still set environment variables by adding them to the end of the virtualenv's activate script. Activating the virtualenv will set the variables.

Bash

CMD

Powershell

Unix Bash, venv/bin/activate:

```
$ export FLASK_APP=hello
```

Windows CMD, venv\Scripts\activate.bat:

```
> set FLASK_APP=hello
```

Windows Powershell, venv\Scripts\activate.ps1:

```
> $env:FLASK_APP = "hello"
```

It is preferred to use dotenv support over this, since `.flaskenv` can be committed to the repository so that it works automatically wherever the project is checked out.

1.18.8 Custom Commands

The flask command is implemented using [Click](#). See that project's documentation for full information about writing commands.

This example adds the command `create-user` that takes the argument `name`.

```
import click
from flask import Flask

app = Flask(__name__)

@app.cli.command("create-user")
@click.argument("name")
def create_user(name):
    ...
```

```
$ flask create-user admin
```

This example adds the same command, but as `user create`, a command in a group. This is useful if you want to organize multiple related commands.

```
import click
from flask import Flask
from flask.cli import AppGroup

app = Flask(__name__)
user_cli = AppGroup('user')

@user_cli.command('create')
@click.argument('name')
def create_user(name):
    ...

app.cli.add_command(user_cli)
```

```
$ flask user create demo
```

See [Testing CLI Commands](#) for an overview of how to test your custom commands.

Registering Commands with Blueprints

If your application uses blueprints, you can optionally register CLI commands directly onto them. When your blueprint is registered onto your application, the associated commands will be available to the flask command. By default, those commands will be nested in a group matching the name of the blueprint.

```
from flask import Blueprint

bp = Blueprint('students', __name__)

@bp.cli.command('create')
@click.argument('name')
def create(name):
    ...

app.register_blueprint(bp)
```

```
$ flask students create alice
```

You can alter the group name by specifying the `cli_group` parameter when creating the *Blueprint* object, or later with `app.register_blueprint(bp, cli_group='...')`. The following are equivalent:

```
bp = Blueprint('students', __name__, cli_group='other')
# or
app.register_blueprint(bp, cli_group='other')
```

```
$ flask other create alice
```

Specifying `cli_group=None` will remove the nesting and merge the commands directly to the application's level:

```
bp = Blueprint('students', __name__, cli_group=None)
# or
app.register_blueprint(bp, cli_group=None)
```

```
$ flask create alice
```

Application Context

Commands added using the Flask app's `cli command()` decorator will be executed with an application context pushed, so your command and extensions have access to the app and its configuration. If you create a command using the Click `command()` decorator instead of the Flask decorator, you can use `with_appcontext()` to get the same behavior.

```
import click
from flask.cli import with_appcontext

@click.command()
@with_appcontext
def do_work():
    ...

app.cli.add_command(do_work)
```

If you're sure a command doesn't need the context, you can disable it:

```
@app.cli.command(with_appcontext=False)
def do_work():
    ...
```

1.18.9 Plugins

Flask will automatically load commands specified in the `flask.commands` entry point. This is useful for extensions that want to add commands when they are installed. Entry points are specified in `setup.py`

```
from setuptools import setup

setup(
    name='flask-my-extension',
    ...,
    entry_points={
        'flask.commands': [
            'my-command=flask_my_extension.commands:cli'
```

(continues on next page)

(continued from previous page)

```

    ],
    },
)

```

Inside `flask_my_extension/commands.py` you can then export a Click object:

```

import click

@click.command()
def cli():
    ...

```

Once that package is installed in the same virtualenv as your Flask project, you can run `flask my-command` to invoke the command.

1.18.10 Custom Scripts

When you are using the app factory pattern, it may be more convenient to define your own Click script. Instead of using `FLASK_APP` and letting Flask load your application, you can create your own Click object and export it as a `console script` entry point.

Create an instance of `FlaskGroup` and pass it the factory:

```

import click
from flask import Flask
from flask.cli import FlaskGroup

def create_app():
    app = Flask('wiki')
    # other setup
    return app

@click.group(cls=FlaskGroup, create_app=create_app)
def cli():
    """Management script for the Wiki application."""

```

Define the entry point in `setup.py`:

```

from setuptools import setup

setup(
    name='flask-my-extension',
    ...,
    entry_points={
        'console_scripts': [
            'wiki=wiki:cli'
        ],
    },
)

```

Install the application in the virtualenv in editable mode and the custom script is available. Note that you don't need to set `FLASK_APP`.

```

$ pip install -e .
$ wiki run

```

Errors in Custom Scripts


When using a custom script, if you introduce an error in your module-level code, the reloader will fail because it can no longer load the entry point.

The `flask` command, being separate from your code, does not have this issue and is recommended in most cases.

1.18.11 PyCharm Integration

PyCharm Professional provides a special Flask run configuration. For the Community Edition, we need to configure it to call the `flask run` CLI command with the correct environment variables. These instructions should be similar for any other IDE you might want to use.

In PyCharm, with your project open, click on *Run* from the menu bar and go to *Edit Configurations*. You'll be greeted by a screen similar to this:

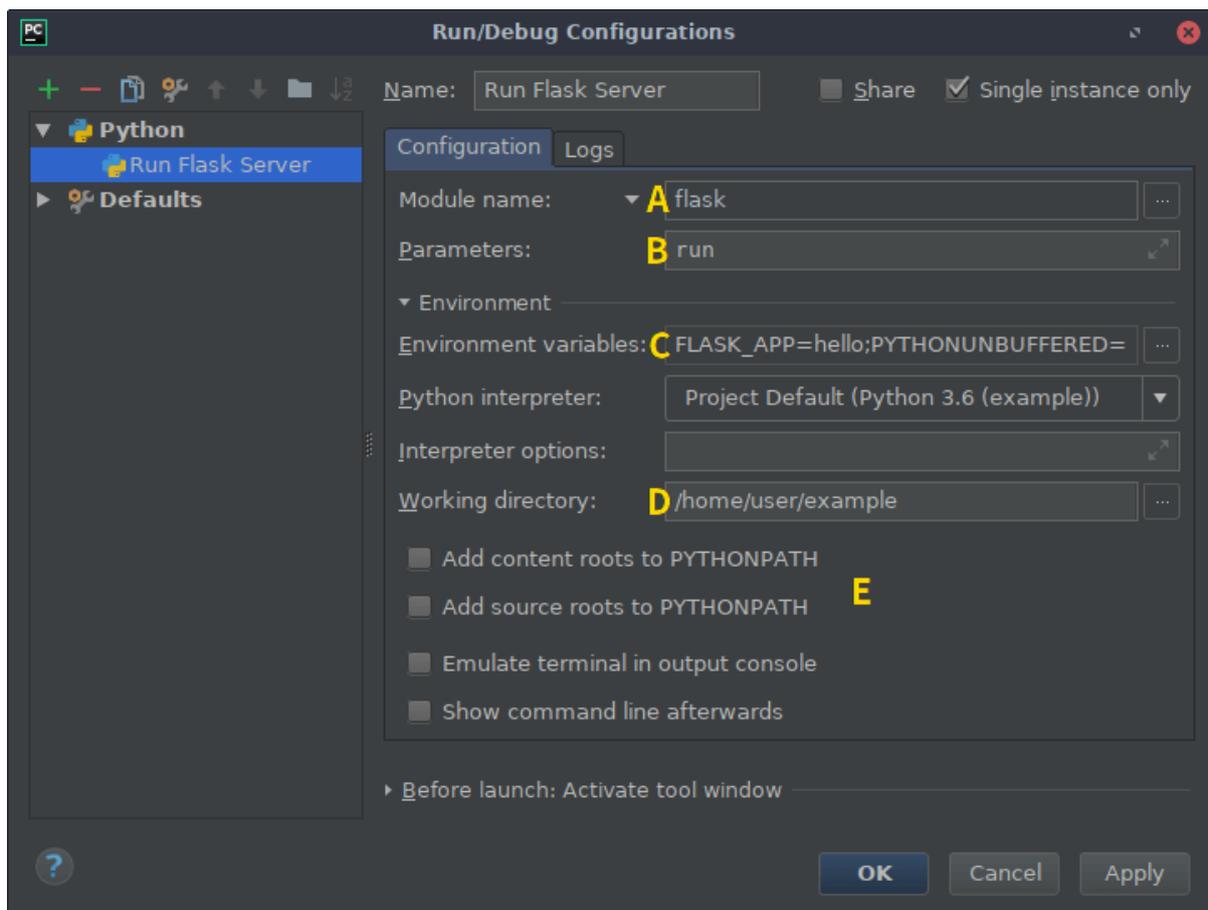

There's quite a few options to change, but once we've done it for one command, we can easily copy the entire configuration and make a single tweak to give us access to other commands, including any custom ones you may implement yourself.

Click the + (*Add New Configuration*) button and select *Python*. Give the configuration a name such as "flask run". For the `flask run` command, check "Single instance only" since you can't run the server more than once at the same time.

Select *Module name* from the dropdown (A) then input `flask`.

The *Parameters* field (B) is set to the CLI command to execute (with any arguments). In this example we use `run`, which will run the development server.

You can skip this next step if you're using *Environment Variables From dotenv*. We need to add an environment variable (C) to identify our application. Click on the browse button and add an entry with `FLASK_APP` on the

left and the Python import or file on the right (hello for example). Add an entry with `FLASK_ENV` and set it to `development`.

Next we need to set the working directory (**D**) to be the folder where our application resides.

If you have installed your project as a package in your virtualenv, you may untick the `PYTHONPATH` options (**E**). This will more accurately match how you deploy the app later.

Click *Apply* to save the configuration, or *OK* to save and close the window. Select the configuration in the main PyCharm window and click the play button next to it to run the server.

Now that we have a configuration which runs `flask run` from within PyCharm, we can copy that configuration and alter the *Script* argument to run a different CLI command, e.g. `flask shell`.

1.19 Development Server

Flask provides a `run` command to run the application with a development server. In development mode, this server provides an interactive debugger and will reload when code is changed.

Warning: Do not use the development server when deploying to production. It is intended for use only during local development. It is not designed to be particularly efficient, stable, or secure.

See *Deployment Options* for deployment options.

1.19.1 Command Line

The `flask run` command line script is the recommended way to run the development server. It requires setting the `FLASK_APP` environment variable to point to your application, and `FLASK_ENV=development` to fully enable development mode.

Bash

CMD

Powershell

```
$ export FLASK_APP=hello
$ export FLASK_ENV=development
$ flask run
```

```
> set FLASK_APP=hello
> set FLASK_ENV=development
> flask run
```

```
> $env:FLASK_APP = "hello"
> $env:FLASK_ENV = "development"
> flask run
```

This enables the development environment, including the interactive debugger and reloader, and then starts the server on `http://localhost:5000/`. Use `flask run --help` to see the available options, and *Command Line Interface* for detailed instructions about configuring and using the CLI.

Note: Prior to Flask 1.0 the `FLASK_ENV` environment variable was not supported and you needed to enable debug mode by exporting `FLASK_DEBUG=1`. This can still be used to control debug mode, but you should prefer setting the development environment as shown above.

Lazy or Eager Loading

When using the `flask run` command with the reloader, the server will continue to run even if you introduce syntax errors or other initialization errors into the code. Accessing the site will show the interactive debugger for the error, rather than crashing the server. This feature is called “lazy loading”.

If a syntax error is already present when calling `flask run`, it will fail immediately and show the traceback rather than waiting until the site is accessed. This is intended to make errors more visible initially while still allowing the server to handle errors on reload.

To override this behavior and always fail immediately, even on reload, pass the `--eager-loading` option. To always keep the server running, even on the initial call, pass `--lazy-loading`.

1.19.2 In Code

As an alternative to the `flask run` command, the development server can also be started from Python with the `Flask.run()` method. This method takes arguments similar to the CLI options to control the server. The main difference from the CLI command is that the server will crash if there are errors when reloading.

`debug=True` can be passed to enable the debugger and reloader, but the `FLASK_ENV=development` environment variable is still required to fully enable development mode.

Place the call in a main block, otherwise it will interfere when trying to import and run the application with a production server later.

```
if __name__ == "__main__":  
    app.run(debug=True)
```

```
$ python hello.py
```

1.20 Working with the Shell

New in version 0.3.

One of the reasons everybody loves Python is the interactive shell. It basically allows you to execute Python commands in real time and immediately get results back. Flask itself does not come with an interactive shell, because it does not require any specific setup upfront, just import your application and start playing around.

There are however some handy helpers to make playing around in the shell a more pleasant experience. The main issue with interactive console sessions is that you’re not triggering a request like a browser does which means that `g`, `request` and others are not available. But the code you want to test might depend on them, so what can you do?

This is where some helper functions come in handy. Keep in mind however that these functions are not only there for interactive shell usage, but also for unit testing and other situations that require a faked request context.

Generally it’s recommended that you read *The Request Context* first.

1.20.1 Command Line Interface

Starting with Flask 0.11 the recommended way to work with the shell is the `flask shell` command which does a lot of this automatically for you. For instance the shell is automatically initialized with a loaded application context.

For more information see *Command Line Interface*.

1.20.2 Creating a Request Context

The easiest way to create a proper request context from the shell is by using the `test_request_context` method which creates us a `RequestContext`:

```
>>> ctx = app.test_request_context()
```

Normally you would use the `with` statement to make this request object active, but in the shell it's easier to use the `push()` and `pop()` methods by hand:

```
>>> ctx.push()
```

From that point onwards you can work with the request object until you call `pop`:

```
>>> ctx.pop()
```

1.20.3 Firing Before/After Request

By just creating a request context, you still don't have run the code that is normally run before a request. This might result in your database being unavailable if you are connecting to the database in a before-request callback or the current user not being stored on the `g` object etc.

This however can easily be done yourself. Just call `preprocess_request()`:

```
>>> ctx = app.test_request_context()
>>> ctx.push()
>>> app.preprocess_request()
```

Keep in mind that the `preprocess_request()` function might return a response object, in that case just ignore it.

To shutdown a request, you need to trick a bit before the after request functions (triggered by `process_response()`) operate on a response object:

```
>>> app.process_response(app.response_class())
<Response 0 bytes [200 OK]>
>>> ctx.pop()
```

The functions registered as `teardown_request()` are automatically called when the context is popped. So this is the perfect place to automatically tear down resources that were needed by the request context (such as database connections).

1.20.4 Further Improving the Shell Experience

If you like the idea of experimenting in a shell, create yourself a module with stuff you want to star import into your interactive session. There you could also define some more helper methods for common things such as initializing the database, dropping tables etc.

Just put them into a module (like `shelltools`) and import from there:

```
>>> from shelltools import *
```

1.21 Patterns for Flask

Certain features and interactions are common enough that you will find them in most web applications. For example, many applications use a relational database and user authentication. They will open a database connection at the beginning of the request and get the information for the logged in user. At the end of the request, the database connection is closed.

These types of patterns may be a bit outside the scope of Flask itself, but Flask makes it easy to implement them. Some common patterns are collected in the following pages.

1.21.1 Large Applications as Packages

Imagine a simple flask application structure that looks like this:

```
/yourapplication
  yourapplication.py
  /static
    style.css
  /templates
    layout.html
    index.html
    login.html
    ...
```

While this is fine for small applications, for larger applications it's a good idea to use a package instead of a module. The *Tutorial* is structured to use the package pattern, see the [example code](#).

Simple Packages

To convert that into a larger one, just create a new folder `yourapplication` inside the existing one and move everything below it. Then rename `yourapplication.py` to `__init__.py`. (Make sure to delete all `.pyc` files first, otherwise things would most likely break)

You should then end up with something like that:

```
/yourapplication
  /yourapplication
    __init__.py
  /static
    style.css
  /templates
    layout.html
    index.html
    login.html
    ...
```

But how do you run your application now? The naive `python yourapplication/__init__.py` will not work. Let's just say that Python does not want modules in packages to be the startup file. But that is not a big problem, just add a new file called `setup.py` next to the inner `yourapplication` folder with the following contents:

```
from setuptools import setup

setup(
    name='yourapplication',
    packages=['yourapplication'],
    include_package_data=True,
    install_requires=[
```

(continues on next page)

(continued from previous page)

```
    'flask',  
    ],  
)
```

In order to run the application you need to export an environment variable that tells Flask where to find the application instance:

Bash

CMD

Powershell

```
$ export FLASK_APP=yourapplication
```

```
> set FLASK_APP=yourapplication
```

```
> $env:FLASK_APP = "yourapplication"
```

If you are outside of the project directory make sure to provide the exact path to your application directory. Similarly you can turn on the development features like this:

Bash

CMD

Powershell

```
$ export FLASK_ENV=development
```

```
> set FLASK_ENV=development
```

```
> $env:FLASK_ENV = "development"
```

In order to install and run the application you need to issue the following commands:

```
$ pip install -e .  
$ flask run
```

What did we gain from this? Now we can restructure the application a bit into multiple modules. The only thing you have to remember is the following quick checklist:

1. the *Flask* application object creation has to be in the `__init__.py` file. That way each module can import it safely and the `__name__` variable will resolve to the correct package.
2. all the view functions (the ones with a `route()` decorator on top) have to be imported in the `__init__.py` file. Not the object itself, but the module it is in. Import the view module **after the application object is created**.

Here's an example `__init__.py`:

```
from flask import Flask  
app = Flask(__name__)  
  
import yourapplication.views
```

And this is what `views.py` would look like:

```
from yourapplication import app
```

(continues on next page)

(continued from previous page)

```
@app.route('/')
def index():
    return 'Hello World!'
```

You should then end up with something like that:

```
/yourapplication
  setup.py
  /yourapplication
    __init__.py
    views.py
  /static
    style.css
  /templates
    layout.html
    index.html
    login.html
    ...
```

Circular Imports

Every Python programmer hates them, and yet we just added some: circular imports (That's when two modules depend on each other. In this case `views.py` depends on `__init__.py`). Be advised that this is a bad idea in general but here it is actually fine. The reason for this is that we are not actually using the views in `__init__.py` and just ensuring the module is imported and we are doing that at the bottom of the file.

There are still some problems with that approach but if you want to use decorators there is no way around that. Check out the *Becoming Big* section for some inspiration how to deal with that.

Working with Blueprints

If you have larger applications it's recommended to divide them into smaller groups where each group is implemented with the help of a blueprint. For a gentle introduction into this topic refer to the *Modular Applications with Blueprints* chapter of the documentation.

1.21.2 Application Factories

If you are already using packages and blueprints for your application (*Modular Applications with Blueprints*) there are a couple of really nice ways to further improve the experience. A common pattern is creating the application object when the blueprint is imported. But if you move the creation of this object into a function, you can then create multiple instances of this app later.

So why would you want to do this?

1. Testing. You can have instances of the application with different settings to test every case.
2. Multiple instances. Imagine you want to run different versions of the same application. Of course you could have multiple instances with different configs set up in your webserver, but if you use factories, you can have multiple instances of the same application running in the same application process which can be handy.

So how would you then actually implement that?

Basic Factories

The idea is to set up the application in a function. Like this:

```
def create_app(config_filename):
    app = Flask(__name__)
    app.config.from_pyfile(config_filename)

    from yourapplication.model import db
    db.init_app(app)

    from yourapplication.views.admin import admin
    from yourapplication.views.frontend import frontend
    app.register_blueprint(admin)
    app.register_blueprint(frontend)

    return app
```

The downside is that you cannot use the application object in the blueprints at import time. You can however use it from within a request. How do you get access to the application with the config? Use `current_app`:

```
from flask import current_app, Blueprint, render_template
admin = Blueprint('admin', __name__, url_prefix='/admin')

@admin.route('/')
def index():
    return render_template(current_app.config['INDEX_TEMPLATE'])
```

Here we look up the name of a template in the config.

Factories & Extensions

It's preferable to create your extensions and app factories so that the extension object does not initially get bound to the application.

Using `Flask-SQLAlchemy`, as an example, you should not do something along those lines:

```
def create_app(config_filename):
    app = Flask(__name__)
    app.config.from_pyfile(config_filename)

    db = SQLAlchemy(app)
```

But, rather, in `model.py` (or equivalent):

```
db = SQLAlchemy()
```

and in your `application.py` (or equivalent):

```
def create_app(config_filename):
    app = Flask(__name__)
    app.config.from_pyfile(config_filename)

    from yourapplication.model import db
    db.init_app(app)
```

Using this design pattern, no application-specific state is stored on the extension object, so one extension object can be used for multiple apps. For more information about the design of extensions refer to *Flask Extension Development*.

Using Applications

To run such an application, you can use the **flask** command:

Bash

CMD

Powershell

```
$ export FLASK_APP=myapp
$ flask run
```

```
> set FLASK_APP=myapp
> flask run
```

```
> $env:FLASK_APP = "myapp"
> flask run
```

Flask will automatically detect the factory (`create_app` or `make_app`) in `myapp`. You can also pass arguments to the factory like this:

Bash

CMD

Powershell

```
$ export FLASK_APP="myapp:create_app('dev')"
$ flask run
```

```
> set FLASK_APP="myapp:create_app('dev')"
> flask run
```

```
> $env:FLASK_APP = "myapp:create_app('dev')"
> flask run
```

Then the `create_app` factory in `myapp` is called with the string `'dev'` as the argument. See [Command Line Interface](#) for more detail.

Factory Improvements

The factory function above is not very clever, but you can improve it. The following changes are straightforward to implement:

1. Make it possible to pass in configuration values for unit tests so that you don't have to create config files on the filesystem.
2. Call a function from a blueprint when the application is setting up so that you have a place to modify attributes of the application (like hooking in before/after request handlers etc.)
3. Add in WSGI middlewares when the application is being created if necessary.

1.21.3 Application Dispatching

Application dispatching is the process of combining multiple Flask applications on the WSGI level. You can combine not only Flask applications but any WSGI application. This would allow you to run a Django and a Flask application in the same interpreter side by side if you want. The usefulness of this depends on how the applications work internally.

The fundamental difference from *Large Applications as Packages* is that in this case you are running the same or different Flask applications that are entirely isolated from each other. They run different configurations and are dispatched on the WSGI level.

Working with this Document

Each of the techniques and examples below results in an `application` object that can be run with any WSGI server. For production, see *Deployment Options*. For development, Werkzeug provides a server through `werkzeug.serving.run_simple()`:

```
from werkzeug.serving import run_simple
run_simple('localhost', 5000, application, use_reloader=True)
```

Note that `run_simple` is not intended for use in production. Use a production WSGI server. See *Deployment Options*.

In order to use the interactive debugger, debugging must be enabled both on the application and the simple server. Here is the “hello world” example with debugging and `run_simple`:

```
from flask import Flask
from werkzeug.serving import run_simple

app = Flask(__name__)
app.debug = True

@app.route('/')
def hello_world():
    return 'Hello World!'

if __name__ == '__main__':
    run_simple('localhost', 5000, app,
              use_reloader=True, use_debugger=True, use_evalex=True)
```

Combining Applications

If you have entirely separated applications and you want them to work next to each other in the same Python interpreter process you can take advantage of the `werkzeug.wsgi.DispatcherMiddleware`. The idea here is that each Flask application is a valid WSGI application and they are combined by the dispatcher middleware into a larger one that is dispatched based on prefix.

For example you could have your main application run on `/` and your backend interface on `/backend`:

```
from werkzeug.middleware.dispatcher import DispatcherMiddleware
from frontend_app import application as frontend
from backend_app import application as backend

application = DispatcherMiddleware(frontend, {
    '/backend': backend
})
```

Dispatch by Subdomain

Sometimes you might want to use multiple instances of the same application with different configurations. Assuming the application is created inside a function and you can call that function to instantiate it, that is really easy to implement. In order to develop your application to support creating new instances in functions have a look at the *Application Factories* pattern.

A very common example would be creating applications per subdomain. For instance you configure your webserver to dispatch all requests for all subdomains to your application and you then use the subdomain information to create user-specific instances. Once you have your server set up to listen on all subdomains you can use a very simple WSGI application to do the dynamic application creation.

The perfect level for abstraction in that regard is the WSGI layer. You write your own WSGI application that looks at the request that comes and delegates it to your Flask application. If that application does not exist yet, it is dynamically created and remembered:

```
from threading import Lock

class SubdomainDispatcher(object):

    def __init__(self, domain, create_app):
        self.domain = domain
        self.create_app = create_app
        self.lock = Lock()
        self.instances = {}

    def get_application(self, host):
        host = host.split(':')[0]
        assert host.endswith(self.domain), 'Configuration error'
        subdomain = host[:-len(self.domain)].rstrip('.')
        with self.lock:
            app = self.instances.get(subdomain)
            if app is None:
                app = self.create_app(subdomain)
                self.instances[subdomain] = app
            return app

    def __call__(self, environ, start_response):
        app = self.get_application(environ['HTTP_HOST'])
        return app(environ, start_response)
```

This dispatcher can then be used like this:

```
from myapplication import create_app, get_user_for_subdomain
from werkzeug.exceptions import NotFound

def make_app(subdomain):
    user = get_user_for_subdomain(subdomain)
    if user is None:
        # if there is no user for that subdomain we still have
        # to return a WSGI application that handles that request.
        # We can then just return the NotFound() exception as
        # application which will render a default 404 page.
        # You might also redirect the user to the main page then
        return NotFound()

    # otherwise create the application for the specific user
    return create_app(user)
```

(continues on next page)

(continued from previous page)

```
application = SubdomainDispatcher('example.com', make_app)
```

Dispatch by Path

Dispatching by a path on the URL is very similar. Instead of looking at the Host header to figure out the subdomain one simply looks at the request path up to the first slash:

```
from threading import Lock
from werkzeug.wsgi import pop_path_info, peek_path_info

class PathDispatcher(object):

    def __init__(self, default_app, create_app):
        self.default_app = default_app
        self.create_app = create_app
        self.lock = Lock()
        self.instances = {}

    def get_application(self, prefix):
        with self.lock:
            app = self.instances.get(prefix)
            if app is None:
                app = self.create_app(prefix)
                if app is not None:
                    self.instances[prefix] = app
            return app

    def __call__(self, environ, start_response):
        app = self.get_application(peek_path_info(environ))
        if app is not None:
            pop_path_info(environ)
        else:
            app = self.default_app
        return app(environ, start_response)
```

The big difference between this and the subdomain one is that this one falls back to another application if the creator function returns None:

```
from myapplication import create_app, default_app, get_user_for_prefix

def make_app(prefix):
    user = get_user_for_prefix(prefix)
    if user is not None:
        return create_app(user)

application = PathDispatcher(default_app, make_app)
```

1.21.4 Using URL Processors

New in version 0.7.

Flask 0.7 introduces the concept of URL processors. The idea is that you might have a bunch of resources with common parts in the URL that you don't always explicitly want to provide. For instance you might have a bunch of URLs that have the language code in it but you don't want to have to handle it in every single function yourself.

URL processors are especially helpful when combined with blueprints. We will handle both application specific URL processors here as well as blueprint specifics.

Internationalized Application URLs

Consider an application like this:

```
from flask import Flask, g

app = Flask(__name__)

@app.route('/<lang_code>/')
def index(lang_code):
    g.lang_code = lang_code
    ...

@app.route('/<lang_code>/about')
def about(lang_code):
    g.lang_code = lang_code
    ...
```

This is an awful lot of repetition as you have to handle the language code setting on the `g` object yourself in every single function. Sure, a decorator could be used to simplify this, but if you want to generate URLs from one function to another you would have to still provide the language code explicitly which can be annoying.

For the latter, this is where `url_defaults()` functions come in. They can automatically inject values into a call to `url_for()`. The code below checks if the language code is not yet in the dictionary of URL values and if the endpoint wants a value named 'lang_code':

```
@app.url_defaults
def add_language_code(endpoint, values):
    if 'lang_code' in values or not g.lang_code:
        return
    if app.url_map.is_endpoint_expecting(endpoint, 'lang_code'):
        values['lang_code'] = g.lang_code
```

The method `is_endpoint_expecting()` of the URL map can be used to figure out if it would make sense to provide a language code for the given endpoint.

The reverse of that function are `url_value_preprocessor()`s. They are executed right after the request was matched and can execute code based on the URL values. The idea is that they pull information out of the values dictionary and put it somewhere else:

```
@app.url_value_preprocessor
def pull_lang_code(endpoint, values):
    g.lang_code = values.pop('lang_code', None)
```

That way you no longer have to do the `lang_code` assignment to `g` in every function. You can further improve that by writing your own decorator that prefixes URLs with the language code, but the more beautiful solution is using a blueprint. Once the 'lang_code' is popped from the values dictionary and it will no longer be forwarded to the view function reducing the code to this:

```

from flask import Flask, g

app = Flask(__name__)

@app.url_defaults
def add_language_code(endpoint, values):
    if 'lang_code' in values or not g.lang_code:
        return
    if app.url_map.is_endpoint_pecting(endpoint, 'lang_code'):
        values['lang_code'] = g.lang_code

@app.url_value_preprocessor
def pull_lang_code(endpoint, values):
    g.lang_code = values.pop('lang_code', None)

@app.route('/<lang_code>/')
def index():
    ...

@app.route('/<lang_code>/about')
def about():
    ...

```

Internationalized Blueprint URLs

Because blueprints can automatically prefix all URLs with a common string it's easy to automatically do that for every function. Furthermore blueprints can have per-blueprint URL processors which removes a whole lot of logic from the `url_defaults()` function because it no longer has to check if the URL is really interested in a 'lang_code' parameter:

```

from flask import Blueprint, g

bp = Blueprint('frontend', __name__, url_prefix='<lang_code>')

@bp.url_defaults
def add_language_code(endpoint, values):
    values.setdefault('lang_code', g.lang_code)

@bp.url_value_preprocessor
def pull_lang_code(endpoint, values):
    g.lang_code = values.pop('lang_code')

@bp.route('/')
def index():
    ...

@bp.route('/about')
def about():
    ...

```

1.21.5 Deploying with Setuptools

Setuptools, is an extension library that is commonly used to distribute Python libraries and extensions. It extends `distutils`, a basic module installation system shipped with Python to also support various more complex constructs that make larger applications easier to distribute:

- **support for dependencies:** a library or application can declare a list of other libraries it depends on which will be installed automatically for you.
- **package registry:** `setuptools` registers your package with your Python installation. This makes it possible to query information provided by one package from another package. The best known feature of this system is the entry point support which allows one package to declare an “entry point” that another package can hook into to extend the other package.
- **installation manager:** `pip` can install other libraries for you.

Flask itself, and all the libraries you can find on PyPI are distributed with either `setuptools` or `distutils`.

In this case we assume your application is called `yourapplication.py` and you are not using a module, but a package. If you have not yet converted your application into a package, head over to [Large Applications as Packages](#) to see how this can be done.

A working deployment with `setuptools` is the first step into more complex and more automated deployment scenarios. If you want to fully automate the process, also read the [Deploying with Fabric](#) chapter.

Basic Setup Script

Because you have Flask installed, you have `setuptools` available on your system. Flask already depends upon `setuptools`.

Standard disclaimer applies: *use a virtualenv*.

Your setup code always goes into a file named `setup.py` next to your application. The name of the file is only convention, but because everybody will look for a file with that name, you better not change it.

A basic `setup.py` file for a Flask application looks like this:

```
from setuptools import setup

setup(
    name='Your Application',
    version='1.0',
    long_description=__doc__,
    packages=['yourapplication'],
    include_package_data=True,
    zip_safe=False,
    install_requires=['Flask']
)
```

Please keep in mind that you have to list subpackages explicitly. If you want `setuptools` to lookup the packages for you automatically, you can use the `find_packages` function:

```
from setuptools import setup, find_packages

setup(
    ...
    packages=find_packages()
)
```

Most parameters to the `setup` function should be self explanatory, `include_package_data` and `zip_safe` might not be. `include_package_data` tells `setuptools` to look for a `MANIFEST.in` file and install all the entries that match as package data. We will use this to distribute the static files and templates along with the Python module

(see *Distributing Resources*). The `zip_safe` flag can be used to force or prevent zip Archive creation. In general you probably don't want your packages to be installed as zip files because some tools do not support them and they make debugging a lot harder.

Tagging Builds

It is useful to distinguish between release and development builds. Add a `setup.cfg` file to configure these options.

```
[egg_info]
tag_build = .dev
tag_date = 1

[aliases]
release = egg_info -Db ''
```

Running `python setup.py sdist` will create a development package with “.dev” and the current date appended: `flaskr-1.0.dev20160314.tar.gz`. Running `python setup.py release sdist` will create a release package with only the version: `flaskr-1.0.tar.gz`.

Distributing Resources

If you try to install the package you just created, you will notice that folders like `static` or `templates` are not installed for you. The reason for this is that `setuptools` does not know which files to add for you. What you should do, is to create a `MANIFEST.in` file next to your `setup.py` file. This file lists all the files that should be added to your tarball:

```
recursive-include yourapplication/templates *
recursive-include yourapplication/static *
```

Don't forget that even if you enlist them in your `MANIFEST.in` file, they won't be installed for you unless you set the `include_package_data` parameter of the `setup` function to `True`!

Declaring Dependencies

Dependencies are declared in the `install_requires` parameter as a list. Each item in that list is the name of a package that should be pulled from PyPI on installation. By default it will always use the most recent version, but you can also provide minimum and maximum version requirements. Here some examples:

```
install_requires=[
    'Flask>=0.2',
    'SQLAlchemy>=0.6',
    'BrokenPackage>=0.7,<=1.0'
]
```

As mentioned earlier, dependencies are pulled from PyPI. What if you want to depend on a package that cannot be found on PyPI and won't be because it is an internal package you don't want to share with anyone? Just do it as if there was a PyPI entry and provide a list of alternative locations where `setuptools` should look for tarballs:

```
dependency_links=['http://example.com/yourfiles']
```

Make sure that page has a directory listing and the links on the page are pointing to the actual tarballs with their correct filenames as this is how `setuptools` will find the files. If you have an internal company server that contains the packages, provide the URL to that server.

Installing / Developing

To install your application (ideally into a virtualenv) just run the `setup.py` script with the `install` parameter. It will install your application into the virtualenv's site-packages folder and also download and install all dependencies:

```
$ python setup.py install
```

If you are developing on the package and also want the requirements to be installed, you can use the `develop` command instead:

```
$ python setup.py develop
```

This has the advantage of just installing a link to the site-packages folder instead of copying the data over. You can then continue to work on the code without having to run `install` again after each change.

1.21.6 Deploying with Fabric

[Fabric](#) is a tool for Python similar to Makefiles but with the ability to execute commands on a remote server. In combination with a properly set up Python package (*Large Applications as Packages*) and a good concept for configurations (*Configuration Handling*) it is very easy to deploy Flask applications to external servers.

Before we get started, here a quick checklist of things we have to ensure upfront:

- Fabric 1.0 has to be installed locally. This tutorial assumes the latest version of Fabric.
- The application already has to be a package and requires a working `setup.py` file (*Deploying with Setup-tools*).
- In the following example we are using `mod_wsgi` for the remote servers. You can of course use your own favourite server there, but for this example we chose Apache + `mod_wsgi` because it's very easy to setup and has a simple way to reload applications without root access.

Creating the first Fabfile

A fabfile is what controls what Fabric executes. It is named `fabfile.py` and executed by the `fab` command. All the functions defined in that file will show up as `fab` subcommands. They are executed on one or more hosts. These hosts can be defined either in the fabfile or on the command line. In this case we will add them to the fabfile.

This is a basic first example that has the ability to upload the current source code to the server and install it into a pre-existing virtual environment:

```
from fabric.api import *

# the user to use for the remote commands
env.user = 'appuser'
# the servers where the commands are executed
env.hosts = ['server1.example.com', 'server2.example.com']

def pack():
    # build the package
    local('python setup.py sdist --formats=gztar', capture=False)

def deploy():
    # figure out the package name and version
    dist = local('python setup.py --fullname', capture=True).strip()
    filename = f'{dist}.tar.gz'

    # upload the package to the temporary folder on the server
```

(continues on next page)

(continued from previous page)

```

put(f'dist/{filename}', f'/tmp/{filename}')

# install the package in the application's virtualenv with pip
run(f'/var/www/yourapplication/env/bin/pip install /tmp/{filename}')

# remove the uploaded package
run(f'rm -r /tmp/{filename}')

# touch the .wsgi file to trigger a reload in mod_wsgi
run('touch /var/www/yourapplication.wsgi')

```

Running Fabfiles

Now how do you execute that fabfile? You use the *fab* command. To deploy the current version of the code on the remote server you would use this command:

```
$ fab pack deploy
```

However this requires that our server already has the `/var/www/yourapplication` folder created and `/var/www/yourapplication/env` to be a virtual environment. Furthermore are we not creating the configuration or `.wsgi` file on the server. So how do we bootstrap a new server into our infrastructure?

This now depends on the number of servers we want to set up. If we just have one application server (which the majority of applications will have), creating a command in the fabfile for this is overkill. But obviously you can do that. In that case you would probably call it *setup* or *bootstrap* and then pass the servername explicitly on the command line:

```
$ fab -H newserver.example.com bootstrap
```

To setup a new server you would roughly do these steps:

1. Create the directory structure in `/var/www`:

```

$ mkdir /var/www/yourapplication
$ cd /var/www/yourapplication
$ virtualenv --distribute env

```

2. Upload a new `application.wsgi` file to the server and the configuration file for the application (eg: `application.cfg`)
3. Create a new Apache config for `yourapplication` and activate it. Make sure to activate watching for changes of the `.wsgi` file so that we can automatically reload the application by touching it. See *mod_wsgi (Apache)*.

So now the question is, where do the `application.wsgi` and `application.cfg` files come from?

The WSGI File

The WSGI file has to import the application and also to set an environment variable so that the application knows where to look for the config. This is a short example that does exactly that:

```

import os
os.environ['YOURAPPLICATION_CONFIG'] = '/var/www/yourapplication/application.cfg'
from yourapplication import app

```

The application itself then has to initialize itself like this to look for the config at that environment variable:

```
app = Flask(__name__)
app.config.from_object('yourapplication.default_config')
app.config.from_envvar('YOURAPPLICATION_CONFIG')
```

This approach is explained in detail in the *Configuration Handling* section of the documentation.

The Configuration File

Now as mentioned above, the application will find the correct configuration file by looking up the `YOURAPPLICATION_CONFIG` environment variable. So we have to put the configuration in a place where the application will be able to find it. Configuration files have the unfriendly quality of being different on all computers, so you do not version them usually.

A popular approach is to store configuration files for different servers in a separate version control repository and check them out on all servers. Then symlink the file that is active for the server into the location where it's expected (eg: `/var/www/yourapplication`).

Either way, in our case here we only expect one or two servers and we can upload them ahead of time by hand.

First Deployment

Now we can do our first deployment. We have set up the servers so that they have their virtual environments and activated apache configs. Now we can pack up the application and deploy it:

```
$ fab pack deploy
```

Fabric will now connect to all servers and run the commands as written down in the fabfile. First it will execute `pack` so that we have our tarball ready and then it will execute `deploy` and upload the source code to all servers and install it there. Thanks to the `setup.py` file we will automatically pull in the required libraries into our virtual environment.

Next Steps

From that point onwards there is so much that can be done to make deployment actually fun:

- Create a *bootstrap* command that initializes new servers. It could initialize a new virtual environment, setup apache appropriately etc.
- Put configuration files into a separate version control repository and symlink the active configs into place.
- You could also put your application code into a repository and check out the latest version on the server and then install. That way you can also easily go back to older versions.
- hook in testing functionality so that you can deploy to an external server and run the test suite.

Working with Fabric is fun and you will notice that it's quite magical to type `fab deploy` and see your application being deployed automatically to one or more remote servers.

1.21.7 Using SQLite 3 with Flask

In Flask you can easily implement the opening of database connections on demand and closing them when the context dies (usually at the end of the request).

Here is a simple example of how you can use SQLite 3 with Flask:

```
import sqlite3
from flask import g

DATABASE = '/path/to/database.db'

def get_db():
    db = getattr(g, '_database', None)
    if db is None:
        db = g._database = sqlite3.connect(DATABASE)
    return db

@app.teardown_appcontext
def close_connection(exception):
    db = getattr(g, '_database', None)
    if db is not None:
        db.close()
```

Now, to use the database, the application must either have an active application context (which is always true if there is a request in flight) or create an application context itself. At that point the `get_db` function can be used to get the current database connection. Whenever the context is destroyed the database connection will be terminated.

Note: if you use Flask 0.9 or older you need to use `flask._app_ctx_stack.top` instead of `g` as the `flask.g` object was bound to the request and not application context.

Example:

```
@app.route('/')
def index():
    cur = get_db().cursor()
    ...
```

Note: Please keep in mind that the `teardown_request` and `appcontext` functions are always executed, even if a before-request handler failed or was never executed. Because of this we have to make sure here that the database is there before we close it.

Connect on Demand

The upside of this approach (connecting on first use) is that this will only open the connection if truly necessary. If you want to use this code outside a request context you can use it in a Python shell by opening the application context by hand:

```
with app.app_context():
    # now you can use get_db()
```

Easy Querying

Now in each request handling function you can access `get_db()` to get the current open database connection. To simplify working with SQLite, a row factory function is useful. It is executed for every result returned from the database to convert the result. For instance, in order to get dictionaries instead of tuples, this could be inserted into the `get_db` function we created above:

```
def make_dicts(cursor, row):
    return dict((cursor.description[idx][0], value)
                for idx, value in enumerate(row))

db.row_factory = make_dicts
```

This will make the `sqlite3` module return dicts for this database connection, which are much nicer to deal with. Even more simply, we could place this in `get_db` instead:

```
db.row_factory = sqlite3.Row
```

This would use `Row` objects rather than dicts to return the results of queries. These are `namedtuple`s, so we can access them either by index or by key. For example, assuming we have a `sqlite3.Row` called `r` for the rows `id`, `FirstName`, `LastName`, and `MiddleInitial`:

```
>>> # You can get values based on the row's name
>>> r['FirstName']
John
>>> # Or, you can get them based on index
>>> r[1]
John
# Row objects are also iterable:
>>> for value in r:
...     print(value)
1
John
Doe
M
```

Additionally, it is a good idea to provide a query function that combines getting the cursor, executing and fetching the results:

```
def query_db(query, args=(), one=False):
    cur = get_db().execute(query, args)
    rv = cur.fetchall()
    cur.close()
    return (rv[0] if rv else None) if one else rv
```

This handy little function, in combination with a row factory, makes working with the database much more pleasant than it is by just using the raw cursor and connection objects.

Here is how you can use it:

```
for user in query_db('select * from users'):
    print user['username'], 'has the id', user['user_id']
```

Or if you just want a single result:

```
user = query_db('select * from users where username = ?',
                [the_username], one=True)
if user is None:
    print 'No such user'
```

(continues on next page)

(continued from previous page)

```
else:
    print the_username, 'has the id', user['user_id']
```

To pass variable parts to the SQL statement, use a question mark in the statement and pass in the arguments as a list. Never directly add them to the SQL statement with string formatting because this makes it possible to attack the application using [SQL Injections](#).

Initial Schemas

Relational databases need schemas, so applications often ship a *schema.sql* file that creates the database. It's a good idea to provide a function that creates the database based on that schema. This function can do that for you:

```
def init_db():
    with app.app_context():
        db = get_db()
        with app.open_resource('schema.sql', mode='r') as f:
            db.cursor().executescript(f.read())
        db.commit()
```

You can then create such a database from the Python shell:

```
>>> from yourapplication import init_db
>>> init_db()
```

1.21.8 SQLAlchemy in Flask

Many people prefer [SQLAlchemy](#) for database access. In this case it's encouraged to use a package instead of a module for your flask application and drop the models into a separate module (*Large Applications as Packages*). While that is not necessary, it makes a lot of sense.

There are four very common ways to use SQLAlchemy. I will outline each of them here:

Flask-SQLAlchemy Extension

Because SQLAlchemy is a common database abstraction layer and object relational mapper that requires a little bit of configuration effort, there is a Flask extension that handles that for you. This is recommended if you want to get started quickly.

You can download [Flask-SQLAlchemy](#) from [PyPI](#).

Declarative

The declarative extension in SQLAlchemy is the most recent method of using SQLAlchemy. It allows you to define tables and models in one go, similar to how Django works. In addition to the following text I recommend the official documentation on the [declarative](#) extension.

Here's the example `database.py` module for your application:

```
from sqlalchemy import create_engine
from sqlalchemy.orm import scoped_session, sessionmaker
from sqlalchemy.ext.declarative import declarative_base

engine = create_engine('sqlite:///tmp/test.db')
db_session = scoped_session(sessionmaker(autocommit=False,
                                         autoflush=False,
```

(continues on next page)

```

                                bind=engine))
Base = declarative_base()
Base.query = db_session.query_property()

def init_db():
    # import all modules here that might define models so that
    # they will be registered properly on the metadata. Otherwise
    # you will have to import them first before calling init_db()
    import yourapplication.models
    Base.metadata.create_all(bind=engine)

```

To define your models, just subclass the *Base* class that was created by the code above. If you are wondering why we don't have to care about threads here (like we did in the SQLite3 example above with the *g* object): that's because SQLAlchemy does that for us already with the *scoped_session*.

To use SQLAlchemy in a declarative way with your application, you just have to put the following code into your application module. Flask will automatically remove database sessions at the end of the request or when the application shuts down:

```

from yourapplication.database import db_session

@app.teardown_appcontext
def shutdown_session(exception=None):
    db_session.remove()

```

Here is an example model (put this into *models.py*, e.g.):

```

from sqlalchemy import Column, Integer, String
from yourapplication.database import Base

class User(Base):
    __tablename__ = 'users'
    id = Column(Integer, primary_key=True)
    name = Column(String(50), unique=True)
    email = Column(String(120), unique=True)

    def __init__(self, name=None, email=None):
        self.name = name
        self.email = email

    def __repr__(self):
        return f'<User {self.name!r}>'

```

To create the database you can use the *init_db* function:

```

>>> from yourapplication.database import init_db
>>> init_db()

```

You can insert entries into the database like this:

```

>>> from yourapplication.database import db_session
>>> from yourapplication.models import User
>>> u = User('admin', 'admin@localhost')
>>> db_session.add(u)
>>> db_session.commit()

```

Querying is simple as well:

```
>>> User.query.all()
[<User 'admin'>]
>>> User.query.filter(User.name == 'admin').first()
<User 'admin'>
```

Manual Object Relational Mapping

Manual object relational mapping has a few upsides and a few downsides versus the declarative approach from above. The main difference is that you define tables and classes separately and map them together. It's more flexible but a little more to type. In general it works like the declarative approach, so make sure to also split up your application into multiple modules in a package.

Here is an example `database.py` module for your application:

```
from sqlalchemy import create_engine, MetaData
from sqlalchemy.orm import scoped_session, sessionmaker

engine = create_engine('sqlite:///tmp/test.db')
metadata = MetaData()
db_session = scoped_session(sessionmaker(autocommit=False,
                                         autoflush=False,
                                         bind=engine))

def init_db():
    metadata.create_all(bind=engine)
```

As in the declarative approach, you need to close the session after each request or application context shutdown. Put this into your application module:

```
from yourapplication.database import db_session

@app.teardown_appcontext
def shutdown_session(exception=None):
    db_session.remove()
```

Here is an example table and model (put this into `models.py`):

```
from sqlalchemy import Table, Column, Integer, String
from sqlalchemy.orm import mapper
from yourapplication.database import metadata, db_session

class User(object):
    query = db_session.query_property()

    def __init__(self, name=None, email=None):
        self.name = name
        self.email = email

    def __repr__(self):
        return f'<User {self.name!r}>'

users = Table('users', metadata,
              Column('id', Integer, primary_key=True),
              Column('name', String(50), unique=True),
              Column('email', String(120), unique=True)
)
mapper(User, users)
```

Querying and inserting works exactly the same as in the example above.

SQL Abstraction Layer

If you just want to use the database system (and SQL) abstraction layer you basically only need the engine:

```
from sqlalchemy import create_engine, MetaData, Table

engine = create_engine('sqlite:///tmp/test.db')
metadata = MetaData(bind=engine)
```

Then you can either declare the tables in your code like in the examples above, or automatically load them:

```
from sqlalchemy import Table

users = Table('users', metadata, autoload=True)
```

To insert data you can use the *insert* method. We have to get a connection first so that we can use a transaction:

```
>>> con = engine.connect()
>>> con.execute(users.insert(), name='admin', email='admin@localhost')
```

SQLAlchemy will automatically commit for us.

To query your database, you use the engine directly or use a connection:

```
>>> users.select(users.c.id == 1).execute().first()
(1, 'admin', 'admin@localhost')
```

These results are also dict-like tuples:

```
>>> r = users.select(users.c.id == 1).execute().first()
>>> r['name']
'admin'
```

You can also pass strings of SQL statements to the `execute()` method:

```
>>> engine.execute('select * from users where id = :1', [1]).first()
(1, 'admin', 'admin@localhost')
```

For more information about SQLAlchemy, head over to the [website](#).

1.21.9 Uploading Files

Ah yes, the good old problem of file uploads. The basic idea of file uploads is actually quite simple. It basically works like this:

1. A `<form>` tag is marked with `enctype=multipart/form-data` and an `<input type=file>` is placed in that form.
2. The application accesses the file from the `files` dictionary on the request object.
3. use the `save()` method of the file to save the file permanently somewhere on the filesystem.

A Gentle Introduction

Let's start with a very basic application that uploads a file to a specific upload folder and displays a file to the user. Let's look at the bootstrapping code for our application:

```
import os
from flask import Flask, flash, request, redirect, url_for
from werkzeug.utils import secure_filename

UPLOAD_FOLDER = '/path/to/the/uploads'
ALLOWED_EXTENSIONS = {'txt', 'pdf', 'png', 'jpg', 'jpeg', 'gif'}

app = Flask(__name__)
app.config['UPLOAD_FOLDER'] = UPLOAD_FOLDER
```

So first we need a couple of imports. Most should be straightforward, the `werkzeug.secure_filename()` is explained a little bit later. The `UPLOAD_FOLDER` is where we will store the uploaded files and the `ALLOWED_EXTENSIONS` is the set of allowed file extensions.

Why do we limit the extensions that are allowed? You probably don't want your users to be able to upload everything there if the server is directly sending out the data to the client. That way you can make sure that users are not able to upload HTML files that would cause XSS problems (see *Cross-Site Scripting (XSS)*). Also make sure to disallow `.php` files if the server executes them, but who has PHP installed on their server, right? :)

Next the functions that check if an extension is valid and that uploads the file and redirects the user to the URL for the uploaded file:

```
def allowed_file(filename):
    return '.' in filename and \
        filename.rsplit('.', 1)[1].lower() in ALLOWED_EXTENSIONS

@app.route('/', methods=['GET', 'POST'])
def upload_file():
    if request.method == 'POST':
        # check if the post request has the file part
        if 'file' not in request.files:
            flash('No file part')
            return redirect(request.url)
        file = request.files['file']
        # If the user does not select a file, the browser submits an
        # empty file without a filename.
        if file.filename == '':
            flash('No selected file')
            return redirect(request.url)
        if file and allowed_file(file.filename):
            filename = secure_filename(file.filename)
            file.save(os.path.join(app.config['UPLOAD_FOLDER'], filename))
            return redirect(url_for('download_file', name=filename))
    return '''
<!doctype html>
<title>Upload new File</title>
<h1>Upload new File</h1>
<form method=post enctype=multipart/form-data>
  <input type=file name=file>
  <input type=submit value=Upload>
</form>
'''
```

So what does that `secure_filename()` function actually do? Now the problem is that there is that principle called “never trust user input”. This is also true for the filename of an uploaded file. All submitted form data can

be forged, and filenames can be dangerous. For the moment just remember: always use that function to secure a filename before storing it directly on the filesystem.

Information for the Pros

So you're interested in what that `secure_filename()` function does and what the problem is if you're not using it? So just imagine someone would send the following information as *filename* to your application:

```
filename = "../../../home/username/.bashrc"
```

Assuming the number of `../` is correct and you would join this with the `UPLOAD_FOLDER` the user might have the ability to modify a file on the server's filesystem he or she should not modify. This does require some knowledge about how the application looks like, but trust me, hackers are patient :)

Now let's look how that function works:

```
>>> secure_filename('../../../home/username/.bashrc')
'home_username_.bashrc'
```

We want to be able to serve the uploaded files so they can be downloaded by users. We'll define a `download_file` view to serve files in the upload folder by name. `url_for("download_file", name=name)` generates download URLs.

```
from flask import send_from_directory

@app.route('/uploads/<name>')
def download_file(name):
    return send_from_directory(app.config["UPLOAD_FOLDER"], name)
```

If you're using middleware or the HTTP server to serve files, you can register the `download_file` endpoint as `build_only` so `url_for` will work without a view function.

```
app.add_url_rule(
    "/uploads/<name>", endpoint="download_file", build_only=True
)
```

Improving Uploads

New in version 0.6.

So how exactly does Flask handle uploads? Well it will store them in the webserver's memory if the files are reasonably small, otherwise in a temporary location (as returned by `tempfile.gettempdir()`). But how do you specify the maximum file size after which an upload is aborted? By default Flask will happily accept file uploads with an unlimited amount of memory, but you can limit that by setting the `MAX_CONTENT_LENGTH` config key:

```
from flask import Flask, Request

app = Flask(__name__)
app.config['MAX_CONTENT_LENGTH'] = 16 * 1000 * 1000
```

The code above will limit the maximum allowed payload to 16 megabytes. If a larger file is transmitted, Flask will raise a `RequestEntityTooLarge` exception.

Connection Reset Issue

When using the local development server, you may get a connection reset error instead of a 413 response. You will get the correct status response when running the app with a production WSGI server.

This feature was added in Flask 0.6 but can be achieved in older versions as well by subclassing the request object. For more information on that consult the Werkzeug documentation on file handling.

Upload Progress Bars

A while ago many developers had the idea to read the incoming file in small chunks and store the upload progress in the database to be able to poll the progress with JavaScript from the client. The client asks the server every 5 seconds how much it has transmitted, but this is something it should already know.

An Easier Solution

Now there are better solutions that work faster and are more reliable. There are JavaScript libraries like [jQuery](#) that have form plugins to ease the construction of progress bar.

Because the common pattern for file uploads exists almost unchanged in all applications dealing with uploads, there are also some Flask extensions that implement a full fledged upload mechanism that allows controlling which file extensions are allowed to be uploaded.

1.21.10 Caching

When your application runs slow, throw some caches in. Well, at least it's the easiest way to speed up things. What does a cache do? Say you have a function that takes some time to complete but the results would still be good enough if they were 5 minutes old. So then the idea is that you actually put the result of that calculation into a cache for some time.

Flask itself does not provide caching for you, but [Flask-Caching](#), an extension for Flask does. Flask-Caching supports various backends, and it is even possible to develop your own caching backend.

1.21.11 View Decorators

Python has a really interesting feature called function decorators. This allows some really neat things for web applications. Because each view in Flask is a function, decorators can be used to inject additional functionality to one or more functions. The [route\(\)](#) decorator is the one you probably used already. But there are use cases for implementing your own decorator. For instance, imagine you have a view that should only be used by people that are logged in. If a user goes to the site and is not logged in, they should be redirected to the login page. This is a good example of a use case where a decorator is an excellent solution.

Login Required Decorator

So let's implement such a decorator. A decorator is a function that wraps and replaces another function. Since the original function is replaced, you need to remember to copy the original function's information to the new function. Use [functools.wraps\(\)](#) to handle this for you.

This example assumes that the login page is called 'login' and that the current user is stored in `g.user` and is `None` if there is no-one logged in.

```
from functools import wraps
from flask import g, request, redirect, url_for

def login_required(f):
    @wraps(f)
    def decorated_function(*args, **kwargs):
        if g.user is None:
            return redirect(url_for('login', next=request.url))
        return f(*args, **kwargs)
    return decorated_function
```

To use the decorator, apply it as innermost decorator to a view function. When applying further decorators, always remember that the `route()` decorator is the outermost.

```
@app.route('/secret_page')
@login_required
def secret_page():
    pass
```

Note: The next value will exist in `request.args` after a GET request for the login page. You'll have to pass it along when sending the POST request from the login form. You can do this with a hidden input tag, then retrieve it from `request.form` when logging the user in.

```
<input type="hidden" value="{{ request.args.get('next', '') }}" />
```

Caching Decorator

Imagine you have a view function that does an expensive calculation and because of that you would like to cache the generated results for a certain amount of time. A decorator would be nice for that. We're assuming you have set up a cache like mentioned in [Caching](#).

Here is an example cache function. It generates the cache key from a specific prefix (actually a format string) and the current path of the request. Notice that we are using a function that first creates the decorator that then decorates the function. Sounds awful? Unfortunately it is a little bit more complex, but the code should still be straightforward to read.

The decorated function will then work as follows

1. get the unique cache key for the current request based on the current path.
2. get the value for that key from the cache. If the cache returned something we will return that value.
3. otherwise the original function is called and the return value is stored in the cache for the timeout provided (by default 5 minutes).

Here the code:

```
from functools import wraps
from flask import request

def cached(timeout=5 * 60, key='view/{}'):
    def decorator(f):
        @wraps(f)
        def decorated_function(*args, **kwargs):
            cache_key = key.format(request.path)
            rv = cache.get(cache_key)
            if rv is not None:
                return rv
            rv = f(*args, **kwargs)
            cache.set(cache_key, rv, timeout=timeout)
            return rv
        return decorated_function
    return decorator
```

Notice that this assumes an instantiated cache object is available, see [Caching](#).

Templating Decorator

A common pattern invented by the TurboGears guys a while back is a templating decorator. The idea of that decorator is that you return a dictionary with the values passed to the template from the view function and the template is automatically rendered. With that, the following three examples do exactly the same:

```
@app.route('/')
def index():
    return render_template('index.html', value=42)

@app.route('/')
@templated('index.html')
def index():
    return dict(value=42)

@app.route('/')
@templated()
def index():
    return dict(value=42)
```

As you can see, if no template name is provided it will use the endpoint of the URL map with dots converted to slashes + '.html'. Otherwise the provided template name is used. When the decorated function returns, the dictionary returned is passed to the template rendering function. If None is returned, an empty dictionary is assumed, if something else than a dictionary is returned we return it from the function unchanged. That way you can still use the redirect function or return simple strings.

Here is the code for that decorator:

```
from functools import wraps
from flask import request, render_template

def templated(template=None):
    def decorator(f):
        @wraps(f)
        def decorated_function(*args, **kwargs):
            template_name = template
            if template_name is None:
                template_name = f"{request.endpoint.replace('.', '/')}.html"
            ctx = f(*args, **kwargs)
            if ctx is None:
                ctx = {}
            elif not isinstance(ctx, dict):
                return ctx
            return render_template(template_name, **ctx)
        return decorated_function
    return decorator
```

Endpoint Decorator

When you want to use the werkzeug routing system for more flexibility you need to map the endpoint as defined in the [Rule](#) to a view function. This is possible with this decorator. For example:

```
from flask import Flask
from werkzeug.routing import Rule

app = Flask(__name__)
app.url_map.add(Rule('/', endpoint='index'))
```

(continues on next page)

```
@app.endpoint('index')
def my_index():
    return "Hello world"
```

1.21.12 Form Validation with WTForms

When you have to work with form data submitted by a browser view, code quickly becomes very hard to read. There are libraries out there designed to make this process easier to manage. One of them is [WTForms](#) which we will handle here. If you find yourself in the situation of having many forms, you might want to give it a try.

When you are working with WTForms you have to define your forms as classes first. I recommend breaking up the application into multiple modules (*Large Applications as Packages*) for that and adding a separate module for the forms.

Getting the most out of WTForms with an Extension

The [Flask-WTF](#) extension expands on this pattern and adds a few little helpers that make working with forms and Flask more fun. You can get it from [PyPI](#).

The Forms

This is an example form for a typical registration page:

```
from wtforms import Form, BooleanField, StringField, PasswordField, validators

class RegistrationForm(Form):
    username = StringField('Username', [validators.Length(min=4, max=25)])
    email = StringField('Email Address', [validators.Length(min=6, max=35)])
    password = PasswordField('New Password', [
        validators.DataRequired(),
        validators.EqualTo('confirm', message='Passwords must match')
    ])
    confirm = PasswordField('Repeat Password')
    accept_tos = BooleanField('I accept the TOS', [validators.DataRequired()])
```

In the View

In the view function, the usage of this form looks like this:

```
@app.route('/register', methods=['GET', 'POST'])
def register():
    form = RegistrationForm(request.form)
    if request.method == 'POST' and form.validate():
        user = User(form.username.data, form.email.data,
                    form.password.data)
        db_session.add(user)
        flash('Thanks for registering')
        return redirect(url_for('login'))
    return render_template('register.html', form=form)
```

Notice we're implying that the view is using SQLAlchemy here (*SQLAlchemy in Flask*), but that's not a requirement, of course. Adapt the code as necessary.

Things to remember:

1. create the form from the request form value if the data is submitted via the HTTP POST method and args if the data is submitted as GET.
2. to validate the data, call the `validate()` method, which will return `True` if the data validates, `False` otherwise.
3. to access individual values from the form, access `form.<NAME>.data`.

Forms in Templates

Now to the template side. When you pass the form to the templates, you can easily render them there. Look at the following example template to see how easy this is. WTForms does half the form generation for us already. To make it even nicer, we can write a macro that renders a field with label and a list of errors if there are any.

Here's an example `_formhelpers.html` template with such a macro:

```
{% macro render_field(field) %}
<dt>{{ field.label }}
<dd>{{ field(**kwargs)|safe }}
{% if field.errors %}
<ul class=errors>
  {% for error in field.errors %}
    <li>{{ error }}</li>
  {% endfor %}
</ul>
{% endif %}
</dd>
{% endmacro %}
```

This macro accepts a couple of keyword arguments that are forwarded to WTForm's field function, which renders the field for us. The keyword arguments will be inserted as HTML attributes. So, for example, you can call `render_field(form.username, class='username')` to add a class to the input element. Note that WTForms returns standard Python strings, so we have to tell Jinja2 that this data is already HTML-escaped with the `|safe` filter.

Here is the `register.html` template for the function we used above, which takes advantage of the `_formhelpers.html` template:

```
{% from "_formhelpers.html" import render_field %}
<form method=post>
<dl>
  {{ render_field(form.username) }}
  {{ render_field(form.email) }}
  {{ render_field(form.password) }}
  {{ render_field(form.confirm) }}
  {{ render_field(form.accept_tos) }}
</dl>
<p><input type=submit value=Register>
</form>
```

For more information about WTForms, head over to the [WTForms website](#).

1.21.13 Template Inheritance

The most powerful part of Jinja is template inheritance. Template inheritance allows you to build a base “skeleton” template that contains all the common elements of your site and defines **blocks** that child templates can override.

Sounds complicated but is very basic. It’s easiest to understand it by starting with an example.

Base Template

This template, which we’ll call `layout.html`, defines a simple HTML skeleton document that you might use for a simple two-column page. It’s the job of “child” templates to fill the empty blocks with content:

```
<!doctype html>
<html>
  <head>
    {% block head %}
    <link rel="stylesheet" href="{{ url_for('static', filename='style.css') }}">
    <title>{% block title %}{% endblock %} - My Webpage</title>
    {% endblock %}
  </head>
  <body>
    <div id="content">{% block content %}{% endblock %}</div>
    <div id="footer">
      {% block footer %}
      &copy; Copyright 2010 by <a href="http://domain.invalid/">you</a>.
      {% endblock %}
    </div>
  </body>
</html>
```

In this example, the `{% block %}` tags define four blocks that child templates can fill in. All the `block` tag does is tell the template engine that a child template may override those portions of the template.

Child Template

A child template might look like this:

```
{% extends "layout.html" %}
{% block title %}Index{% endblock %}
{% block head %}
  {{ super() }}
  <style type="text/css">
    .important { color: #336699; }
  </style>
{% endblock %}
{% block content %}
  <h1>Index</h1>
  <p class="important">
    Welcome on my awesome homepage.
  </p>
{% endblock %}
```

The `{% extends %}` tag is the key here. It tells the template engine that this template “extends” another template. When the template system evaluates this template, first it locates the parent. The `extends` tag must be the first tag in the template. To render the contents of a block defined in the parent template, use `{{ super() }}`.

1.21.14 Message Flashing

Good applications and user interfaces are all about feedback. If the user does not get enough feedback they will probably end up hating the application. Flask provides a really simple way to give feedback to a user with the flashing system. The flashing system basically makes it possible to record a message at the end of a request and access it next request and only next request. This is usually combined with a layout template that does this. Note that browsers and sometimes web servers enforce a limit on cookie sizes. This means that flashing messages that are too large for session cookies causes message flashing to fail silently.

Simple Flashing

So here is a full example:

```
from flask import Flask, flash, redirect, render_template, \
    request, url_for

app = Flask(__name__)
app.secret_key = b'_5#y2L"F4Q8z\n\xec]/'

@app.route('/')
def index():
    return render_template('index.html')

@app.route('/login', methods=['GET', 'POST'])
def login():
    error = None
    if request.method == 'POST':
        if request.form['username'] != 'admin' or \
            request.form['password'] != 'secret':
            error = 'Invalid credentials'
        else:
            flash('You were successfully logged in')
            return redirect(url_for('index'))
    return render_template('login.html', error=error)
```

And here is the layout.html template which does the magic:

```
<!doctype html>
<title>My Application</title>
{% with messages = get_flashed_messages() %}
  {% if messages %}
    <ul class=flashes>
      {% for message in messages %}
        <li>{{ message }}</li>
      {% endfor %}
    </ul>
  {% endif %}
{% endwith %}
{% block body %}{% endblock %}
```

Here is the index.html template which inherits from layout.html:

```
{% extends "layout.html" %}
{% block body %}
  <h1>Overview</h1>
  <p>Do you want to <a href="{{ url_for('login') }}">log in?</a>
{% endblock %}
```

And here is the `login.html` template which also inherits from `layout.html`:

```
{% extends "layout.html" %}
{% block body %}
<h1>Login</h1>
{% if error %}
  <p class=error><strong>Error:</strong> {{ error }}
{% endif %}
<form method=post>
  <dl>
    <dt>Username:
    <dd><input type=text name=username value="{{
      request.form.username }}">
    <dt>Password:
    <dd><input type=password name=password>
  </dl>
  <p><input type=submit value=Login>
</form>
{% endblock %}
```

Flashing With Categories

New in version 0.3.

It is also possible to provide categories when flashing a message. The default category if nothing is provided is 'message'. Alternative categories can be used to give the user better feedback. For example error messages could be displayed with a red background.

To flash a message with a different category, just use the second argument to the `flash()` function:

```
flash('Invalid password provided', 'error')
```

Inside the template you then have to tell the `get_flashed_messages()` function to also return the categories. The loop looks slightly different in that situation then:

```
{% with messages = get_flashed_messages(with_categories=true) %}
{% if messages %}
  <ul class=flashes>
    {% for category, message in messages %}
      <li class="{{ category }}">{{ message }}</li>
    {% endfor %}
  </ul>
{% endif %}
{% endwith %}
```

This is just one example of how to render these flashed messages. One might also use the category to add a prefix such as `Error:` to the message.

Filtering Flash Messages

New in version 0.9.

Optionally you can pass a list of categories which filters the results of `get_flashed_messages()`. This is useful if you wish to render each category in a separate block.

```
{% with errors = get_flashed_messages(category_filter=["error"]) %}
{% if errors %}
<div class="alert-message block-message error">
  <a class="close" href="#"></a>
  <ul>
    {%- for msg in errors %}
    <li>{{ msg }}</li>
    {% endfor -%}
  </ul>
</div>
{% endif %}
{% endwith %}
```

1.21.15 AJAX with jQuery

jQuery is a small JavaScript library commonly used to simplify working with the DOM and JavaScript in general. It is the perfect tool to make web applications more dynamic by exchanging JSON between server and client.

JSON itself is a very lightweight transport format, very similar to how Python primitives (numbers, strings, dicts and lists) look like which is widely supported and very easy to parse. It became popular a few years ago and quickly replaced XML as transport format in web applications.

Loading jQuery

In order to use jQuery, you have to download it first and place it in the static folder of your application and then ensure it's loaded. Ideally you have a layout template that is used for all pages where you just have to add a script statement to the bottom of your `<body>` to load jQuery:

```
<script src="{{ url_for('static', filename='jquery.js') }}"></script>
```

Another method is using Google's [AJAX Libraries API](#) to load jQuery:

```
<script src="//ajax.googleapis.com/ajax/libs/jquery/1.9.1/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="{{
  url_for('static', filename='jquery.js') }}">\x3C/script>')</script>
```

In this case you have to put jQuery into your static folder as a fallback, but it will first try to load it directly from Google. This has the advantage that your website will probably load faster for users if they went to at least one other website before using the same jQuery version from Google because it will already be in the browser cache.

Where is My Site?

Do you know where your application is? If you are developing the answer is quite simple: it's on localhost port something and directly on the root of that server. But what if you later decide to move your application to a different location? For example to `http://example.com/myapp`? On the server side this never was a problem because we were using the handy `url_for()` function that could answer that question for us, but if we are using jQuery we should not hardcode the path to the application but make that dynamic, so how can we do that?

A simple method would be to add a script tag to our page that sets a global variable to the prefix to the root of the application. Something like this:

```
<script>
  $SCRIPT_ROOT = {{ request.script_root|tojson }};
</script>
```

JSON View Functions

Now let's create a server side function that accepts two URL arguments of numbers which should be added together and then sent back to the application in a JSON object. This is a really ridiculous example and is something you usually would do on the client side alone, but a simple example that shows how you would use jQuery and Flask nonetheless:

```
from flask import Flask, jsonify, render_template, request
app = Flask(__name__)

@app.route('/_add_numbers')
def add_numbers():
    a = request.args.get('a', 0, type=int)
    b = request.args.get('b', 0, type=int)
    return jsonify(result=a + b)

@app.route('/')
def index():
    return render_template('index.html')
```

As you can see I also added an `index` method here that renders a template. This template will load jQuery as above and have a little form where we can add two numbers and a link to trigger the function on the server side.

Note that we are using the `get()` method here which will never fail. If the key is missing a default value (here `0`) is returned. Furthermore it can convert values to a specific type (like in our case `int`). This is especially handy for code that is triggered by a script (APIs, JavaScript etc.) because you don't need special error reporting in that case.

The HTML

Your `index.html` template either has to extend a `layout.html` template with jQuery loaded and the `$SCRIPT_ROOT` variable set, or do that on the top. Here's the HTML code needed for our little application (`index.html`). Notice that we also drop the script directly into the HTML here. It is usually a better idea to have that in a separate script file:

```
<script>
  $(function() {
    $('#calculate').bind('click', function() {
      $.getJSON($SCRIPT_ROOT + '/_add_numbers', {
        a: $('#input[name="a"]').val(),
        b: $('#input[name="b"]').val()
      }, function(data) {
        $('#result').text(data.result);
      });
    });
  });
```

(continues on next page)

(continued from previous page)

```

    });
    return false;
  });
});
</script>
<h1>jQuery Example</h1>
<p><input type=text size=5 name=a> +
  <input type=text size=5 name=b> =
  <span id=result>?</span>
<p><a href=# id=calculate>calculate server side</a>

```

I won't go into detail here about how jQuery works, just a very quick explanation of the little bit of code above:

1. `$(function() { ... })` specifies code that should run once the browser is done loading the basic parts of the page.
2. `$('#selector')` selects an element and lets you operate on it.
3. `element.bind('event', func)` specifies a function that should run when the user clicked on the element. If that function returns *false*, the default behavior will not kick in (in this case, navigate to the # URL).
4. `$.getJSON(url, data, func)` sends a GET request to *url* and will send the contents of the *data* object as query parameters. Once the data arrived, it will call the given function with the return value as argument. Note that we can use the `$SCRIPT_ROOT` variable here that we set earlier.

Check out the [example source](#) for a full application demonstrating the code on this page, as well as the same thing using XMLHttpRequest and fetch.

1.21.16 Lazily Loading Views

Flask is usually used with the decorators. Decorators are simple and you have the URL right next to the function that is called for that specific URL. However there is a downside to this approach: it means all your code that uses decorators has to be imported upfront or Flask will never actually find your function.

This can be a problem if your application has to import quick. It might have to do that on systems like Google's App Engine or other systems. So if you suddenly notice that your application outgrows this approach you can fall back to a centralized URL mapping.

The system that enables having a central URL map is the `add_url_rule()` function. Instead of using decorators, you have a file that sets up the application with all URLs.

Converting to Centralized URL Map

Imagine the current application looks somewhat like this:

```

from flask import Flask
app = Flask(__name__)

@app.route('/')
def index():
    pass

@app.route('/user/<username>')
def user(username):
    pass

```

Then, with the centralized approach you would have one file with the views (`views.py`) but without any decorator:

```
def index():
    pass

def user(username):
    pass
```

And then a file that sets up an application which maps the functions to URLs:

```
from flask import Flask
from yourapplication import views
app = Flask(__name__)
app.add_url_rule('/', view_func=views.index)
app.add_url_rule('/user/<username>', view_func=views.user)
```

Loading Late

So far we only split up the views and the routing, but the module is still loaded upfront. The trick is to actually load the view function as needed. This can be accomplished with a helper class that behaves just like a function but internally imports the real function on first use:

```
from werkzeug.utils import import_string, cached_property

class LazyView(object):

    def __init__(self, import_name):
        self.__module__, self.__name__ = import_name.rsplit('.', 1)
        self.import_name = import_name

    @cached_property
    def view(self):
        return import_string(self.import_name)

    def __call__(self, *args, **kwargs):
        return self.view(*args, **kwargs)
```

What's important here is that `__module__` and `__name__` are properly set. This is used by Flask internally to figure out how to name the URL rules in case you don't provide a name for the rule yourself.

Then you can define your central place to combine the views like this:

```
from flask import Flask
from yourapplication.helpers import LazyView
app = Flask(__name__)
app.add_url_rule('/',
                 view_func=LazyView('yourapplication.views.index'))
app.add_url_rule('/user/<username>',
                 view_func=LazyView('yourapplication.views.user'))
```

You can further optimize this in terms of amount of keystrokes needed to write this by having a function that calls into `add_url_rule()` by prefixing a string with the project name and a dot, and by wrapping `view_func` in a `LazyView` as needed.

```
def url(import_name, url_rules=[], **options):
    view = LazyView(f"yourapplication.{import_name}")
    for url_rule in url_rules:
        app.add_url_rule(url_rule, view_func=view, **options)
```

(continues on next page)

(continued from previous page)

```
# add a single route to the index view
url('views.index', ['/'])

# add two routes to a single function endpoint
url_rules = ['/user/', '/user/<username>']
url('views.user', url_rules)
```

One thing to keep in mind is that before and after request handlers have to be in a file that is imported upfront to work properly on the first request. The same goes for any kind of remaining decorator.

1.21.17 MongoDB with MongoEngine

Using a document database like MongoDB is a common alternative to relational SQL databases. This pattern shows how to use `MongoEngine`, a document mapper library, to integrate with MongoDB.

A running MongoDB server and `Flask-MongoEngine` are required.

```
pip install flask-mongoengine
```

Configuration

Basic setup can be done by defining `MONGODB_SETTINGS` on `app.config` and creating a `MongoEngine` instance.

```
from flask import Flask
from flask_mongoengine import MongoEngine

app = Flask(__name__)
app.config['MONGODB_SETTINGS'] = {
    "db": "myapp",
}
db = MongoEngine(app)
```

Mapping Documents

To declare a model that represents a Mongo document, create a class that inherits from `Document` and declare each of the fields.

```
import mongoengine as me

class Movie(me.Document):
    title = me.StringField(required=True)
    year = me.IntegerField()
    rated = me.StringField()
    director = me.StringField()
    actors = me.ListField()
```

If the document has nested fields, use `EmbeddedDocument` to defined the fields of the embedded document and `EmbeddedDocumentField` to declare it on the parent document.

```
class Imdb(me.EmbeddedDocument):
    imdb_id = me.StringField()
    rating = me.DecimalField()
    votes = me.IntegerField()
```

(continues on next page)

(continued from previous page)

```
class Movie(me.Document):
    ...
    imdb = me.EmbeddedDocumentField(Imdb)
```

Creating Data

Instantiate your document class with keyword arguments for the fields. You can also assign values to the field attributes after instantiation. Then call `doc.save()`.

```
bttf = Movie(title="Back To The Future", year=1985)
bttf.actors = [
    "Michael J. Fox",
    "Christopher Lloyd"
]
bttf.imdb = Imdb(imdb_id="tt0088763", rating=8.5)
bttf.save()
```

Queries

Use the class `objects` attribute to make queries. A keyword argument looks for an equal value on the field.

```
bttf = Movies.objects(title="Back To The Future").get_or_404()
```

Query operators may be used by concatenating them with the field name using a double-underscore. `objects`, and queries returned by calling it, are iterable.

```
some_theron_movie = Movie.objects(actors__in=["Charlize Theron"]).first()

for recents in Movie.objects(year__gte=2017):
    print(recents.title)
```

Documentation

There are many more ways to define and query documents with MongoEngine. For more information, check out the [official documentation](#).

Flask-MongoEngine adds helpful utilities on top of MongoEngine. Check out their [documentation](#) as well.

1.21.18 Adding a favicon

A “favicon” is an icon used by browsers for tabs and bookmarks. This helps to distinguish your website and to give it a unique brand.

A common question is how to add a favicon to a Flask application. First, of course, you need an icon. It should be 16 × 16 pixels and in the ICO file format. This is not a requirement but a de-facto standard supported by all relevant browsers. Put the icon in your static directory as `favicon.ico`.

Now, to get browsers to find your icon, the correct way is to add a link tag in your HTML. So, for example:

```
<link rel="shortcut icon" href="{{ url_for('static', filename='favicon.ico') }}">
```

That’s all you need for most browsers, however some really old ones do not support this standard. The old de-facto standard is to serve this file, with this name, at the website root. If your application is not mounted at the root path of the domain you either need to configure the web server to serve the icon at the root or if you can’t do that you’re out of luck. If however your application is the root you can simply route a redirect:

```
app.add_url_rule('/favicon.ico',
                 redirect_to=url_for('static', filename='favicon.ico'))
```

If you want to save the extra redirect request you can also write a view using `send_from_directory()`:

```
import os
from flask import send_from_directory

@app.route('/favicon.ico')
def favicon():
    return send_from_directory(os.path.join(app.root_path, 'static'),
                              'favicon.ico', mimetype='image/vnd.microsoft.icon')
```

We can leave out the explicit mimetype and it will be guessed, but we may as well specify it to avoid the extra guessing, as it will always be the same.

The above will serve the icon via your application and if possible it's better to configure your dedicated web server to serve it; refer to the web server's documentation.

See also

- The [Favicon](#) article on Wikipedia

1.21.19 Streaming Contents

Sometimes you want to send an enormous amount of data to the client, much more than you want to keep in memory. When you are generating the data on the fly though, how do you send that back to the client without the roundtrip to the filesystem?

The answer is by using generators and direct responses.

Basic Usage

This is a basic view function that generates a lot of CSV data on the fly. The trick is to have an inner function that uses a generator to generate data and to then invoke that function and pass it to a response object:

```
@app.route('/large.csv')
def generate_large_csv():
    def generate():
        for row in iter_all_rows():
            yield f"{','.join(row)}\n"
    return app.response_class(generate(), mimetype='text/csv')
```

Each yield expression is directly sent to the browser. Note though that some WSGI middlewares might break streaming, so be careful there in debug environments with profilers and other things you might have enabled.

Streaming from Templates

The Jinja2 template engine also supports rendering templates piece by piece. This functionality is not directly exposed by Flask because it is quite uncommon, but you can easily do it yourself:

```
def stream_template(template_name, **context):
    app.update_template_context(context)
    t = app.jinja_env.get_template(template_name)
    rv = t.stream(context)
    rv.enable_buffering(5)
    return rv

@app.route('/my-large-page.html')
def render_large_template():
    rows = iter_all_rows()
    return app.response_class(stream_template('the_template.html', rows=rows))
```

The trick here is to get the template object from the Jinja2 environment on the application and to call `stream()` instead of `render()` which returns a stream object instead of a string. Since we're bypassing the Flask template render functions and using the template object itself we have to make sure to update the render context ourselves by calling `update_template_context()`. The template is then evaluated as the stream is iterated over. Since each time you do a yield the server will flush the content to the client you might want to buffer up a few items in the template which you can do with `rv.enable_buffering(size)`. 5 is a sane default.

Streaming with Context

New in version 0.9.

Note that when you stream data, the request context is already gone the moment the function executes. Flask 0.9 provides you with a helper that can keep the request context around during the execution of the generator:

```
from flask import stream_with_context, request

@app.route('/stream')
def streamed_response():
    def generate():
        yield 'Hello '
        yield request.args['name']
        yield '!'
    return app.response_class(stream_with_context(generate()))
```

Without the `stream_with_context()` function you would get a `RuntimeError` at that point.

1.21.20 Deferred Request Callbacks

One of the design principles of Flask is that response objects are created and passed down a chain of potential callbacks that can modify them or replace them. When the request handling starts, there is no response object yet. It is created as necessary either by a view function or by some other component in the system.

What happens if you want to modify the response at a point where the response does not exist yet? A common example for that would be a `before_request()` callback that wants to set a cookie on the response object.

One way is to avoid the situation. Very often that is possible. For instance you can try to move that logic into a `after_request()` callback instead. However, sometimes moving code there makes it more complicated or awkward to reason about.

As an alternative, you can use `after_this_request()` to register callbacks that will execute after only the current request. This way you can defer code execution from anywhere in the application, based on the current request.

At any time during a request, we can register a function to be called at the end of the request. For example you can remember the current language of the user in a cookie in a `before_request()` callback:

```
from flask import request, after_this_request

@app.before_request
def detect_user_language():
    language = request.cookies.get('user_lang')

    if language is None:
        language = guess_language_from_request()

    # when the response exists, set a cookie with the language
    @after_this_request
    def remember_language(response):
        response.set_cookie('user_lang', language)
        return response

g.language = language
```

1.21.21 Adding HTTP Method Overrides

Some HTTP proxies do not support arbitrary HTTP methods or newer HTTP methods (such as PATCH). In that case it's possible to “proxy” HTTP methods through another HTTP method in total violation of the protocol.

The way this works is by letting the client do an HTTP POST request and set the `X-HTTP-Method-Override` header. Then the method is replaced with the header value before being passed to Flask.

This can be accomplished with an HTTP middleware:

```
class HTTPMethodOverrideMiddleware(object):
    allowed_methods = frozenset([
        'GET',
        'HEAD',
        'POST',
        'DELETE',
        'PUT',
        'PATCH',
        'OPTIONS'
    ])
    bodyless_methods = frozenset(['GET', 'HEAD', 'OPTIONS', 'DELETE'])

    def __init__(self, app):
        self.app = app

    def __call__(self, environ, start_response):
        method = environ.get('HTTP_X_HTTP_METHOD_OVERRIDE', '').upper()
        if method in self.allowed_methods:
            environ['REQUEST_METHOD'] = method
        if method in self.bodyless_methods:
            environ['CONTENT_LENGTH'] = '0'
        return self.app(environ, start_response)
```

To use this with Flask, wrap the app object with the middleware:

```
from flask import Flask
```

(continues on next page)

```
app = Flask(__name__)
app.wsgi_app = HTTPMethodOverrideMiddleware(app.wsgi_app)
```

1.21.22 Request Content Checksums

Various pieces of code can consume the request data and preprocess it. For instance JSON data ends up on the request object already read and processed, form data ends up there as well but goes through a different code path. This seems inconvenient when you want to calculate the checksum of the incoming request data. This is necessary sometimes for some APIs.

Fortunately this is however very simple to change by wrapping the input stream.

The following example calculates the SHA1 checksum of the incoming data as it gets read and stores it in the WSGI environment:

```
import hashlib

class ChecksumCalcStream(object):

    def __init__(self, stream):
        self._stream = stream
        self._hash = hashlib.sha1()

    def read(self, bytes):
        rv = self._stream.read(bytes)
        self._hash.update(rv)
        return rv

    def readline(self, size_hint):
        rv = self._stream.readline(size_hint)
        self._hash.update(rv)
        return rv

def generate_checksum(request):
    env = request.environ
    stream = ChecksumCalcStream(env['wsgi.input'])
    env['wsgi.input'] = stream
    return stream._hash
```

To use this, all you need to do is to hook the calculating stream in before the request starts consuming data. (Eg: be careful accessing `request.form` or anything of that nature. `before_request_handlers` for instance should be careful not to access it).

Example usage:

```
@app.route('/special-api', methods=['POST'])
def special_api():
    hash = generate_checksum(request)
    # Accessing this parses the input stream
    files = request.files
    # At this point the hash is fully constructed.
    checksum = hash.hexdigest()
    return f"Hash was: {checksum}"
```

1.21.23 Celery Background Tasks

If your application has a long running task, such as processing some uploaded data or sending email, you don't want to wait for it to finish during a request. Instead, use a task queue to send the necessary data to another process that will run the task in the background while the request returns immediately.

Celery is a powerful task queue that can be used for simple background tasks as well as complex multi-stage programs and schedules. This guide will show you how to configure Celery using Flask, but assumes you've already read the [First Steps with Celery](#) guide in the Celery documentation.

Install

Celery is a separate Python package. Install it from PyPI using pip:

```
$ pip install celery
```

Configure

The first thing you need is a Celery instance, this is called the celery application. It serves the same purpose as the *Flask* object in Flask, just for Celery. Since this instance is used as the entry-point for everything you want to do in Celery, like creating tasks and managing workers, it must be possible for other modules to import it.

For instance you can place this in a `tasks` module. While you can use Celery without any reconfiguration with Flask, it becomes a bit nicer by subclassing tasks and adding support for Flask's application contexts and hooking it up with the Flask configuration.

This is all that is necessary to properly integrate Celery with Flask:

```
from celery import Celery

def make_celery(app):
    celery = Celery(
        app.import_name,
        backend=app.config['CELERY_RESULT_BACKEND'],
        broker=app.config['CELERY_BROKER_URL']
    )
    celery.conf.update(app.config)

    class ContextTask(celery.Task):
        def __call__(self, *args, **kwargs):
            with app.app_context():
                return self.run(*args, **kwargs)

    celery.Task = ContextTask
    return celery
```

The function creates a new Celery object, configures it with the broker from the application config, updates the rest of the Celery config from the Flask config and then creates a subclass of the task that wraps the task execution in an application context.

An example task

Let's write a task that adds two numbers together and returns the result. We configure Celery's broker and backend to use Redis, create a `celery` application using the factory from above, and then use it to define the task.

```
from flask import Flask

flask_app = Flask(__name__)
flask_app.config.update(
    CELERY_BROKER_URL='redis://localhost:6379',
    CELERY_RESULT_BACKEND='redis://localhost:6379'
)
celery = make_celery(flask_app)

@celery.task()
def add_together(a, b):
    return a + b
```

This task can now be called in the background:

```
result = add_together.delay(23, 42)
result.wait() # 65
```

Run a worker

If you jumped in and already executed the above code you will be disappointed to learn that `.wait()` will never actually return. That's because you also need to run a Celery worker to receive and execute the task.

```
$ celery -A your_application.celery worker
```

The `your_application` string has to point to your application's package or module that creates the `celery` object. Now that the worker is running, `wait` will return the result once the task is finished.

1.21.24 Subclassing Flask

The `Flask` class is designed for subclassing.

For example, you may want to override how request parameters are handled to preserve their order:

```
from flask import Flask, Request
from werkzeug.datastructures import ImmutableOrderedMultiDict
class MyRequest(Request):
    """Request subclass to override request parameter storage"""
    parameter_storage_class = ImmutableOrderedMultiDict
class MyFlask(Flask):
    """Flask subclass using the custom request class"""
    request_class = MyRequest
```

This is the recommended approach for overriding or augmenting Flask's internal functionality.

1.21.25 Single-Page Applications

Flask can be used to serve Single-Page Applications (SPA) by placing static files produced by your frontend framework in a subfolder inside of your project. You will also need to create a catch-all endpoint that routes all requests to your SPA.

The following example demonstrates how to serve an SPA along with an API:

```
from flask import Flask, jsonify

app = Flask(__name__, static_folder='app', static_url_path="/app")

@app.route("/heartbeat")
def heartbeat():
    return jsonify({"status": "healthy"})

@app.route('/', defaults={'path': ''})
@app.route('/<path:path>')
def catch_all(path):
    return app.send_static_file("index.html")
```

1.22 Deployment Options

While lightweight and easy to use, **Flask's built-in server is not suitable for production** as it doesn't scale well. Some of the options available for properly running Flask in production are documented here.

If you want to deploy your Flask application to a WSGI server not listed here, look up the server documentation about how to use a WSGI app with it. Just remember that your Flask application object is the actual WSGI application.

1.22.1 Hosted options

- [Deploying Flask on Heroku](#)
- [Deploying Flask on Google App Engine](#)
- [Deploying Flask on Google Cloud Run](#)
- [Deploying Flask on AWS Elastic Beanstalk](#)
- [Deploying on Azure \(IIS\)](#)
- [Deploying on PythonAnywhere](#)

1.22.2 Self-hosted options

Standalone WSGI Containers

There are popular servers written in Python that contain WSGI applications and serve HTTP. These servers stand alone when they run; you can proxy to them from your web server. Note the section on *Proxy Setups* if you run into issues.

Gunicorn

Gunicorn ‘Green Unicorn’ is a WSGI HTTP Server for UNIX. It’s a pre-fork worker model ported from Ruby’s Unicorn project. It supports both [eventlet](#) and [greenlet](#). Running a Flask application on this server is quite simple:

```
$ gunicorn myproject:app
```

Gunicorn provides many command-line options – see `gunicorn -h`. For example, to run a Flask application with 4 worker processes (`-w 4`) binding to localhost port 4000 (`-b 127.0.0.1:4000`):

```
$ gunicorn -w 4 -b 127.0.0.1:4000 myproject:app
```

The `gunicorn` command expects the names of your application module or package and the application instance within the module. If you use the application factory pattern, you can pass a call to that:

```
$ gunicorn "myproject:create_app()"
```

uWSGI

uWSGI is a fast application server written in C. It is very configurable which makes it more complicated to setup than `gunicorn`.

Running **uWSGI** HTTP Router:

```
$ uwsgi --http 127.0.0.1:5000 --module myproject:app
```

For a more optimized setup, see [configuring uWSGI and NGINX](#).

Gevent

Gevent is a coroutine-based Python networking library that uses [greenlet](#) to provide a high-level synchronous API on top of [libev](#) event loop:

```
from gevent.pywsgi import WSGIServer
from yourapplication import app

http_server = WSGIServer(('', 5000), app)
http_server.serve_forever()
```

Twisted Web

Twisted Web is the web server shipped with **Twisted**, a mature, non-blocking event-driven networking library. **Twisted Web** comes with a standard WSGI container which can be controlled from the command line using the `twistd` utility:

```
$ twistd web --wsgi myproject.app
```

This example will run a Flask application called `app` from a module named `myproject`.

Twisted Web supports many flags and options, and the `twistd` utility does as well; see `twistd -h` and `twistd web -h` for more information. For example, to run a **Twisted Web** server in the foreground, on port 8080, with an application from `myproject`:

```
$ twistd -n web --port tcp:8080 --wsgi myproject.app
```

Proxy Setups

If you deploy your application using one of these servers behind an HTTP proxy you will need to rewrite a few headers in order for the application to work. The two problematic values in the WSGI environment usually are `REMOTE_ADDR` and `HTTP_HOST`. You can configure your `httpd` to pass these headers, or you can fix them in middleware. Werkzeug ships a fixer that will solve some common setups, but you might want to write your own WSGI middleware for specific setups.

Here's a simple `nginx` configuration which proxies to an application served on `localhost` at port `8000`, setting appropriate headers:

```
server {
    listen 80;

    server_name _;

    access_log /var/log/nginx/access.log;
    error_log /var/log/nginx/error.log;

    location / {
        proxy_pass http://127.0.0.1:8000/;
        proxy_redirect off;

        proxy_set_header Host $host;
        proxy_set_header X-Real-IP $remote_addr;
        proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
        proxy_set_header X-Forwarded-Proto $scheme;
    }
}
```

If your `httpd` is not providing these headers, the most common setup invokes the host being set from `X-Forwarded-Host` and the remote address from `X-Forwarded-For`:

```
from werkzeug.middleware.proxy_fix import ProxyFix
app.wsgi_app = ProxyFix(app.wsgi_app, x_proto=1, x_host=1)
```

Trusting Headers

Please keep in mind that it is a security issue to use such a middleware in a non-proxy setup because it will blindly trust the incoming headers which might be forged by malicious clients.

If you want to rewrite the headers from another header, you might want to use a fixer like this:

```
class CustomProxyFix(object):

    def __init__(self, app):
        self.app = app

    def __call__(self, environ, start_response):
        host = environ.get('HTTP_X_FHOST', '')
        if host:
            environ['HTTP_HOST'] = host
        return self.app(environ, start_response)

app.wsgi_app = CustomProxyFix(app.wsgi_app)
```

uWSGI

uWSGI is a deployment option on servers like [nginx](#), [lighttpd](#), and [cherokee](#); see [FastCGI](#) and [Standalone WSGI Containers](#) for other options. To use your WSGI application with uWSGI protocol you will need a uWSGI server first. uWSGI is both a protocol and an application server; the application server can serve uWSGI, FastCGI, and HTTP protocols.

The most popular uWSGI server is [uwsgi](#), which we will use for this guide. Make sure to have it installed to follow along.

Watch Out

Please make sure in advance that any `app.run()` calls you might have in your application file are inside an `if __name__ == '__main__':` block or moved to a separate file. Just make sure it's not called because this will always start a local WSGI server which we do not want if we deploy that application to uWSGI.

Starting your app with uwsgi

`uwsgi` is designed to operate on WSGI callables found in python modules.

Given a flask application in `myapp.py`, use the following command:

```
$ uwsgi -s /tmp/yourapplication.sock --manage-script-name --mount /
↳yourapplication=myapp:app
```

The `--manage-script-name` will move the handling of `SCRIPT_NAME` to `uwsgi`, since it is smarter about that. It is used together with the `--mount` directive which will make requests to `/yourapplication` be directed to `myapp:app`. If your application is accessible at root level, you can use a single `/` instead of `/yourapplication`. `myapp` refers to the name of the file of your flask application (without extension) or the module which provides `app`. `app` is the callable inside of your application (usually the line reads `app = Flask(__name__)`).

If you want to deploy your flask application inside of a virtual environment, you need to also add `--virtualenv /path/to/virtual/environment`. You might also need to add `--plugin python` or `--plugin python3` depending on which python version you use for your project.

Configuring nginx

A basic flask nginx configuration looks like this:

```
location = /yourapplication { rewrite ^ /yourapplication/; }
location /yourapplication { try_files $uri @yourapplication; }
location @yourapplication {
    include uwsgi_params;
    uwsgi_pass unix:/tmp/yourapplication.sock;
}
```

This configuration binds the application to `/yourapplication`. If you want to have it in the URL root its a bit simpler:

```
location / { try_files $uri @yourapplication; }
location @yourapplication {
    include uwsgi_params;
    uwsgi_pass unix:/tmp/yourapplication.sock;
}
```

mod_wsgi (Apache)

If you are using the [Apache](#) webserver, consider using `mod_wsgi`.

Watch Out

Please make sure in advance that any `app.run()` calls you might have in your application file are inside an `if __name__ == '__main__':` block or moved to a separate file. Just make sure it's not called because this will always start a local WSGI server which we do not want if we deploy that application to `mod_wsgi`.

Installing `mod_wsgi`

If you don't have `mod_wsgi` installed yet you have to either install it using a package manager or compile it yourself. The [mod_wsgi installation instructions](#) cover source installations on UNIX systems.

If you are using Ubuntu/Debian you can `apt-get` it and activate it as follows:

```
$ apt-get install libapache2-mod-wsgi-py3
```

If you are using a yum based distribution (Fedora, OpenSUSE, etc..) you can install it as follows:

```
$ yum install mod_wsgi
```

On FreeBSD install `mod_wsgi` by compiling the `www/mod_wsgi` port or by using `pkg_add`:

```
$ pkg install ap24-py37-mod_wsgi
```

If you are using `pkgsrc` you can install `mod_wsgi` by compiling the `www/ap2-wsgi` package.

If you encounter segfaulting child processes after the first apache reload you can safely ignore them. Just restart the server.

Creating a `.wsgi` file

To run your application you need a `yourapplication.wsgi` file. This file contains the code `mod_wsgi` is executing on startup to get the application object. The object called `application` in that file is then used as application.

For most applications the following file should be sufficient:

```
from yourapplication import app as application
```

If a factory function is used in a `__init__.py` file, then the function should be imported:

```
from yourapplication import create_app
application = create_app()
```

If you don't have a factory function for application creation but a singleton instance you can directly import that one as `application`.

Store that file somewhere that you will find it again (e.g.: `/var/www/yourapplication`) and make sure that `yourapplication` and all the libraries that are in use are on the python load path. If you don't want to install it system wide consider using a [virtual python](#) instance. Keep in mind that you will have to actually install your application into the virtualenv as well. Alternatively there is the option to just patch the path in the `.wsgi` file before the import:

```
import sys
sys.path.insert(0, '/path/to/the/application')
```

Configuring Apache

The last thing you have to do is to create an Apache configuration file for your application. In this example we are telling `mod_wsgi` to execute the application under a different user for security reasons:

```
<VirtualHost *>
  ServerName example.com

  WSGIDaemonProcess yourapplication user=user1 group=group1 threads=5
  WSGIScriptAlias / /var/www/yourapplication/yourapplication.wsgi

  <Directory /var/www/yourapplication>
    WSGIProcessGroup yourapplication
    WSGIApplicationGroup %{GLOBAL}
    Order deny,allow
    Allow from all
  </Directory>
</VirtualHost>
```

Note: `WSGIDaemonProcess` isn't implemented in Windows and Apache will refuse to run with the above configuration. On a Windows system, eliminate those lines:

```
<VirtualHost *>
  ServerName example.com
  WSGIScriptAlias / C:\yourdir\yourapp.wsgi
  <Directory C:\yourdir>
    Order deny,allow
    Allow from all
  </Directory>
</VirtualHost>
```

Note: There have been some changes in access control configuration for [Apache 2.4](#).

Most notably, the syntax for directory permissions has changed from `httpd 2.2`

```
Order allow,deny
Allow from all
```

to `httpd 2.4` syntax

```
Require all granted
```

For more information consult the [mod_wsgi](#) documentation.

Troubleshooting

If your application does not run, follow this guide to troubleshoot:

Problem: application does not run, errorlog shows `SystemExit ignored` You have an `app.run()` call in your application file that is not guarded by an `if __name__ == '__main__':` condition. Either remove that `run()` call from the file and move it into a separate `run.py` file or put it into such an if block.

Problem: application gives permission errors Probably caused by your application running as the wrong user. Make sure the folders the application needs access to have the proper privileges set and the application runs as the correct user (user and group parameter to the `WSGIDaemonProcess` directive)

Problem: application dies with an error on print Keep in mind that `mod_wsgi` disallows doing anything with `sys.stdout` and `sys.stderr`. You can disable this protection from the config by setting the `WSGIRestrictStdout` to `off`:

```
WSGIRestrictStdout Off
```

Alternatively you can also replace the standard out in the `.wsgi` file with a different stream:

```
import sys
sys.stdout = sys.stderr
```

Problem: accessing resources gives IO errors Your application probably is a single `.py` file you symlinked into the `site-packages` folder. Please be aware that this does not work, instead you either have to put the folder into the `pythonpath` the file is stored in, or convert your application into a package.

The reason for this is that for non-installed packages, the module filename is used to locate the resources and for symlinks the wrong filename is picked up.

Support for Automatic Reloading

To help deployment tools you can activate support for automatic reloading. Whenever something changes the `.wsgi` file, `mod_wsgi` will reload all the daemon processes for us.

For that, just add the following directive to your *Directory* section:

```
WSGIScriptReloading On
```

Working with Virtual Environments

Virtual environments have the advantage that they never install the required dependencies system wide so you have a better control over what is used where. If you want to use a virtual environment with `mod_wsgi` you have to modify your `.wsgi` file slightly.

Add the following lines to the top of your `.wsgi` file:

```
activate_this = '/path/to/env/bin/activate_this.py'
with open(activate_this) as file_:
    exec(file_.read(), dict(__file__=activate_this))
```

This sets up the load paths according to the settings of the virtual environment. Keep in mind that the path has to be absolute.

FastCGI

FastCGI is a deployment option on servers like [nginx](#), [lighttpd](#), and [cherokee](#); see [uWSGI](#) and [Standalone WSGI Containers](#) for other options. To use your WSGI application with any of them you will need a FastCGI server first. The most popular one is [flup](#) which we will use for this guide. Make sure to have it installed to follow along.

Watch Out

Please make sure in advance that any `app.run()` calls you might have in your application file are inside an `if __name__ == '__main__':` block or moved to a separate file. Just make sure it's not called because this will always start a local WSGI server which we do not want if we deploy that application to FastCGI.

Creating a `.fcgi` file

First you need to create the FastCGI server file. Let's call it `yourapplication.fcgi`:

```
#!/usr/bin/python
from flup.server.fcgi import WSGIServer
from yourapplication import app

if __name__ == '__main__':
    WSGIServer(app).run()
```

This is enough for Apache to work, however nginx and older versions of lighttpd need a socket to be explicitly passed to communicate with the FastCGI server. For that to work you need to pass the path to the socket to the WSGIServer:

```
WSGIServer(application, bindAddress='/path/to/fcgi.sock').run()
```

The path has to be the exact same path you define in the server config.

Save the `yourapplication.fcgi` file somewhere you will find it again. It makes sense to have that in `/var/www/yourapplication` or something similar.

Make sure to set the executable bit on that file so that the servers can execute it:

```
$ chmod +x /var/www/yourapplication/yourapplication.fcgi
```

Configuring Apache

The example above is good enough for a basic Apache deployment but your `.fcgi` file will appear in your application URL e.g. `example.com/yourapplication.fcgi/news/`. There are few ways to configure your application so that `yourapplication.fcgi` does not appear in the URL. A preferable way is to use the `ScriptAlias` and `SetHandler` configuration directives to route requests to the FastCGI server. The following example uses `FastCgiServer` to start 5 instances of the application which will handle all incoming requests:

```
LoadModule fastcgi_module /usr/lib64/httpd/modules/mod_fastcgi.so

FastCgiServer /var/www/html/yourapplication/app.fcgi -idle-timeout 300 -processes 5

<VirtualHost *>
    ServerName webappl.mydomain.com
    DocumentRoot /var/www/html/yourapplication

    AddHandler fastcgi-script fcgi
    ScriptAlias / /var/www/html/yourapplication/app.fcgi/

    <Location />
        SetHandler fastcgi-script
    </Location>
</VirtualHost>
```

These processes will be managed by Apache. If you're using a standalone FastCGI server, you can use the `FastCgiExternalServer` directive instead. Note that in the following the path is not real, it's simply used as an identifier to other directives such as `AliasMatch`:

```
FastCgiServer /var/www/html/yourapplication -host 127.0.0.1:3000
```

If you cannot set `ScriptAlias`, for example on a shared web host, you can use WSGI middleware to remove `yourapplication.fcgi` from the URLs. Set `.htaccess`:

```

<IfModule mod_fcgid.c>
  AddHandler fcgid-script .fcgi
  <Files ~ (\.fcgi)>
    SetHandler fcgid-script
    Options +FollowSymLinks +ExecCGI
  </Files>
</IfModule>

<IfModule mod_rewrite.c>
  Options +FollowSymlinks
  RewriteEngine On
  RewriteBase /
  RewriteCond %{REQUEST_FILENAME} !-f
  RewriteRule ^(.*)$ yourapplication.fcgi/$1 [QSA,L]
</IfModule>

```

Set yourapplication.fcgi:

```

#!/usr/bin/python
#: optional path to your local python site-packages folder
import sys
sys.path.insert(0, '<your_local_path>/lib/python<your_python_version>/site-packages')

from flup.server.fcgi import WSGIServer
from yourapplication import app

class ScriptNameStripper(object):
    def __init__(self, app):
        self.app = app

    def __call__(self, environ, start_response):
        environ['SCRIPT_NAME'] = ''
        return self.app(environ, start_response)

app = ScriptNameStripper(app)

if __name__ == '__main__':
    WSGIServer(app).run()

```

Configuring lighttpd

A basic FastCGI configuration for lighttpd looks like that:

```

fastcgi.server = ("/yourapplication.fcgi" =>
  (
    "socket" => "/tmp/yourapplication-fcgi.sock",
    "bin-path" => "/var/www/yourapplication/yourapplication.fcgi",
    "check-local" => "disable",
    "max-procs" => 1
  )
)

alias.url = (
  "/static/" => "/path/to/your/static/"
)

```

(continues on next page)

(continued from previous page)

```
url.rewrite-once = (
    "^(/static($|/.*))$" => "$1",
    "^(/.*)$" => "/yourapplication.fcgi$1"
)
```

Remember to enable the FastCGI, alias and rewrite modules. This configuration binds the application to /yourapplication. If you want the application to work in the URL root you have to work around a `lighttpd` bug with the `LighttpdCGIRootFix` middleware.

Make sure to apply it only if you are mounting the application the URL root. Also, see the `Lighty` docs for more information on `FastCGI` and `Python` (note that explicitly passing a socket to `run()` is no longer necessary).

Configuring nginx

Installing FastCGI applications on `nginx` is a bit different because by default no FastCGI parameters are forwarded.

A basic Flask FastCGI configuration for `nginx` looks like this:

```
location = /yourapplication { rewrite ^ /yourapplication/ last; }
location /yourapplication { try_files $uri @yourapplication; }
location @yourapplication {
    include fastcgi_params;
    fastcgi_split_path_info ^(/yourapplication)(.*)$;
    fastcgi_param PATH_INFO $fastcgi_path_info;
    fastcgi_param SCRIPT_NAME $fastcgi_script_name;
    fastcgi_pass unix:/tmp/yourapplication-fcgi.sock;
}
```

This configuration binds the application to /yourapplication. If you want to have it in the URL root it's a bit simpler because you don't have to figure out how to calculate `PATH_INFO` and `SCRIPT_NAME`:

```
location / { try_files $uri @yourapplication; }
location @yourapplication {
    include fastcgi_params;
    fastcgi_param PATH_INFO $fastcgi_script_name;
    fastcgi_param SCRIPT_NAME "";
    fastcgi_pass unix:/tmp/yourapplication-fcgi.sock;
}
```

Running FastCGI Processes

Since `nginx` and others do not load FastCGI apps, you have to do it by yourself. `Supervisor` can manage FastCGI processes. You can look around for other FastCGI process managers or write a script to run your `.fcgi` file at boot, e.g. using a `SysV init.d` script. For a temporary solution, you can always run the `.fcgi` script inside `GNU screen`. See `man screen` for details, and note that this is a manual solution which does not persist across system restart:

```
$ screen
$ /var/www/yourapplication/yourapplication.fcgi
```

Debugging

FastCGI deployments tend to be hard to debug on most web servers. Very often the only thing the server log tells you is something along the lines of “premature end of headers”. In order to debug the application the only thing that can really give you ideas why it breaks is switching to the correct user and executing the application by hand.

This example assumes your application is called *application.fcgi* and that your web server user is *www-data*:

```
$ su www-data
$ cd /var/www/yourapplication
$ python application.fcgi
Traceback (most recent call last):
  File "yourapplication.fcgi", line 4, in <module>
ImportError: No module named yourapplication
```

In this case the error seems to be “yourapplication” not being on the python path. Common problems are:

- Relative paths being used. Don’t rely on the current working directory.
- The code depending on environment variables that are not set by the web server.
- Different python interpreters being used.

CGI

If all other deployment methods do not work, CGI will work for sure. CGI is supported by all major servers but usually has a sub-optimal performance.

This is also the way you can use a Flask application on Google’s [App Engine](#), where execution happens in a CGI-like environment.

Watch Out

Please make sure in advance that any `app.run()` calls you might have in your application file are inside an `if __name__ == '__main__':` block or moved to a separate file. Just make sure it’s not called because this will always start a local WSGI server which we do not want if we deploy that application to CGI / app engine.

With CGI, you will also have to make sure that your code does not contain any `print` statements, or that `sys.stdout` is overridden by something that doesn’t write into the HTTP response.

Creating a *.cgi* file

First you need to create the CGI application file. Let’s call it `yourapplication.cgi`:

```
#!/usr/bin/python
from wsgiref.handlers import CGIHandler
from yourapplication import app

CGIHandler().run(app)
```

Server Setup

Usually there are two ways to configure the server. Either just copy the `.cgi` into a `cgi-bin` (and use `mod_rewrite` or something similar to rewrite the URL) or let the server point to the file directly.

In Apache for example you can put something like this into the config:

```
ScriptAlias /app /path/to/the/application.cgi
```

On shared webhosting, though, you might not have access to your Apache config. In this case, a file called `.htaccess`, sitting in the public directory you want your app to be available, works too but the `ScriptAlias` directive won't work in that case:

```
RewriteEngine On
RewriteCond %{REQUEST_FILENAME} !-f # Don't interfere with static files
RewriteRule ^(.*)$ /path/to/the/application.cgi/$1 [L]
```

For more information consult the documentation of your webserver.

ASGI

If you'd like to use an ASGI server you will need to utilise WSGI to ASGI middleware. The `asgiref` `WsgiToAsgi` adapter is recommended as it integrates with the event loop used for Flask's *Using async and await* support. You can use the adapter by wrapping the Flask app,

```
from asgiref.wsgi import WsgiToAsgi
from flask import Flask

app = Flask(__name__)

...

asgi_app = WsgiToAsgi(app)
```

and then serving the `asgi_app` with the ASGI server, e.g. using `Hypercorn`,

```
$ hypercorn module:asgi_app
```

1.23 Becoming Big

Here are your options when growing your codebase or scaling your application.

1.23.1 Read the Source.

Flask started in part to demonstrate how to build your own framework on top of existing well-used tools Werkzeug (WSGI) and Jinja (templating), and as it developed, it became useful to a wide audience. As you grow your codebase, don't just use Flask – understand it. Read the source. Flask's code is written to be read; its documentation is published so you can use its internal APIs. Flask sticks to documented APIs in upstream libraries, and documents its internal utilities so that you can find the hook points needed for your project.

1.23.2 Hook. Extend.

The *API* docs are full of available overrides, hook points, and *Signals*. You can provide custom classes for things like the request and response objects. Dig deeper on the APIs you use, and look for the customizations which are available out of the box in a Flask release. Look for ways in which your project can be refactored into a collection of utilities and Flask extensions. Explore the many *Extensions* in the community, and look for patterns to build your own extensions if you do not find the tools you need.

1.23.3 Subclass.

The *Flask* class has many methods designed for subclassing. You can quickly add or customize behavior by subclassing *Flask* (see the linked method docs) and using that subclass wherever you instantiate an application class. This works well with *Application Factories*. See *Subclassing Flask* for an example.

1.23.4 Wrap with middleware.

The *Application Dispatching* pattern shows in detail how to apply middleware. You can introduce WSGI middleware to wrap your Flask instances and introduce fixes and changes at the layer between your Flask application and your HTTP server. Werkzeug includes several *middlewares*.

1.23.5 Fork.

If none of the above options work, fork Flask. The majority of code of Flask is within Werkzeug and Jinja2. These libraries do the majority of the work. Flask is just the paste that glues those together. For every project there is the point where the underlying framework gets in the way (due to assumptions the original developers had). This is natural because if this would not be the case, the framework would be a very complex system to begin with which causes a steep learning curve and a lot of user frustration.

This is not unique to Flask. Many people use patched and modified versions of their framework to counter shortcomings. This idea is also reflected in the license of Flask. You don't have to contribute any changes back if you decide to modify the framework.

The downside of forking is of course that Flask extensions will most likely break because the new framework has a different import name. Furthermore integrating upstream changes can be a complex process, depending on the number of changes. Because of that, forking should be the very last resort.

1.23.6 Scale like a pro.

For many web applications the complexity of the code is less an issue than the scaling for the number of users or data entries expected. Flask by itself is only limited in terms of scaling by your application code, the data store you want to use and the Python implementation and webserver you are running on.

Scaling well means for example that if you double the amount of servers you get about twice the performance. Scaling bad means that if you add a new server the application won't perform any better or would not even support a second server.

There is only one limiting factor regarding scaling in Flask which are the context local proxies. They depend on context which in Flask is defined as being either a thread, process or greenlet. If your server uses some kind of concurrency that is not based on threads or greenlets, Flask will no longer be able to support these global proxies. However the majority of servers are using either threads, greenlets or separate processes to achieve concurrency which are all methods well supported by the underlying Werkzeug library.

1.23.7 Discuss with the community.

The Flask developers keep the framework accessible to users with codebases big and small. If you find an obstacle in your way, caused by Flask, don't hesitate to contact the developers on the mailing list or Discord server. The best way for the Flask and Flask extension developers to improve the tools for larger applications is getting feedback from users.

1.24 Using `async` and `await`

New in version 2.0.

Routes, error handlers, before request, after request, and teardown functions can all be coroutine functions if Flask is installed with the `async extra` (`pip install flask[async]`). It requires Python 3.7+ where `contextvars`. `ContextVar` is available. This allows views to be defined with `async def` and use `await`.

```
@app.route("/get-data")
async def get_data():
    data = await async_db_query(...)
    return jsonify(data)
```

Pluggable class-based views also support handlers that are implemented as coroutines. This applies to the `dispatch_request()` method in views that inherit from the `flask.views.View` class, as well as all the HTTP method handlers in views that inherit from the `flask.views.MethodView` class.

Using `async` on Windows on Python 3.8

Python 3.8 has a bug related to `asyncio` on Windows. If you encounter something like `ValueError: set_wakeup_fd only works in main thread`, please upgrade to Python 3.9.

1.24.1 Performance

Async functions require an event loop to run. Flask, as a WSGI application, uses one worker to handle one request/response cycle. When a request comes in to an async view, Flask will start an event loop in a thread, run the view function there, then return the result.

Each request still ties up one worker, even for async views. The upside is that you can run async code within a view, for example to make multiple concurrent database queries, HTTP requests to an external API, etc. However, the number of requests your application can handle at one time will remain the same.

Async is not inherently faster than sync code. Async is beneficial when performing concurrent IO-bound tasks, but will probably not improve CPU-bound tasks. Traditional Flask views will still be appropriate for most use cases, but Flask's async support enables writing and using code that wasn't possible natively before.

1.24.2 Background tasks

Async functions will run in an event loop until they complete, at which stage the event loop will stop. This means any additional spawned tasks that haven't completed when the async function completes will be cancelled. Therefore you cannot spawn background tasks, for example via `asyncio.create_task`.

If you wish to use background tasks it is best to use a task queue to trigger background work, rather than spawn tasks in a view function. With that in mind you can spawn `asyncio` tasks by serving Flask with an ASGI server and utilising the `asgiref WsgiToAsgi` adapter as described in *ASGI*. This works as the adapter creates an event loop that runs continually.

1.24.3 When to use Quart instead

Flask's async support is less performant than async-first frameworks due to the way it is implemented. If you have a mainly async codebase it would make sense to consider [Quart](#). Quart is a reimplementation of Flask based on the [ASGI](#) standard instead of WSGI. This allows it to handle many concurrent requests, long running requests, and websockets without requiring multiple worker processes or threads.

It has also already been possible to run Flask with Gevent or Eventlet to get many of the benefits of async request handling. These libraries patch low-level Python functions to accomplish this, whereas `async/await` and ASGI use standard, modern Python capabilities. Deciding whether you should use Flask, Quart, or something else is ultimately up to understanding the specific needs of your project.

1.24.4 Extensions

Flask extensions predating Flask's async support do not expect async views. If they provide decorators to add functionality to views, those will probably not work with async views because they will not await the function or be awaitable. Other functions they provide will not be awaitable either and will probably be blocking if called within an async view.

Extension authors can support async functions by utilising the `flask.Flask.ensure_sync()` method. For example, if the extension provides a view function decorator add `ensure_sync` before calling the decorated function,

```
def extension(func):
    @wraps(func)
    def wrapper(*args, **kwargs):
        ... # Extension logic
        return current_app.ensure_sync(func)(*args, **kwargs)

    return wrapper
```

Check the changelog of the extension you want to use to see if they've implemented async support, or make a feature request or PR to them.

1.24.5 Other event loops

At the moment Flask only supports `asyncio`. It's possible to override `flask.Flask.ensure_sync()` to change how async functions are wrapped to use a different library.

API REFERENCE

If you are looking for information on a specific function, class or method, this part of the documentation is for you.

2.1 API

This part of the documentation covers all the interfaces of Flask. For parts where Flask depends on external libraries, we document the most important right here and provide links to the canonical documentation.

2.1.1 Application Object

```
class flask.Flask(import_name, static_url_path=None, static_folder='static', static_host=None,
                  host_matching=False, subdomain_matching=False, template_folder='templates',
                  instance_path=None, instance_relative_config=False, root_path=None)
```

The flask object implements a WSGI application and acts as the central object. It is passed the name of the module or package of the application. Once it is created it will act as a central registry for the view functions, the URL rules, template configuration and much more.

The name of the package is used to resolve resources from inside the package or the folder the module is contained in depending on if the package parameter resolves to an actual python package (a folder with an `__init__.py` file inside) or a standard module (just a `.py` file).

For more information about resource loading, see [open_resource\(\)](#).

Usually you create a `Flask` instance in your main module or in the `__init__.py` file of your package like this:

```
from flask import Flask
app = Flask(__name__)
```

About the First Parameter

The idea of the first parameter is to give Flask an idea of what belongs to your application. This name is used to find resources on the filesystem, can be used by extensions to improve debugging information and a lot more.

So it's important what you provide there. If you are using a single module, `__name__` is always the correct value. If you however are using a package, it's usually recommended to hardcode the name of your package there.

For example if your application is defined in `yourapplication/app.py` you should create it with one of the two versions below:

```
app = Flask('yourapplication')
app = Flask(__name__.split('.')[0])
```

Why is that? The application will work even with `__name__`, thanks to how resources are looked up. However it will make debugging more painful. Certain extensions can make assumptions based on the import name of your application. For example the Flask-SQLAlchemy extension will look for the code in your application that triggered an SQL query in debug mode. If the import name is not properly set up, that debugging information is lost. (For example it would only pick up SQL queries in `yourapplication.app` and not `yourapplication.views.frontend`)

New in version 1.0: The `host_matching` and `static_host` parameters were added.

New in version 1.0: The `subdomain_matching` parameter was added. Subdomain matching needs to be enabled manually now. Setting `SERVER_NAME` does not implicitly enable it.

New in version 0.11: The `root_path` parameter was added.

New in version 0.8: The `instance_path` and `instance_relative_config` parameters were added.

New in version 0.7: The `static_url_path`, `static_folder`, and `template_folder` parameters were added.

Parameters

- **import_name** (*str*) – the name of the application package
- **static_url_path** (*Optional[str]*) – can be used to specify a different path for the static files on the web. Defaults to the name of the `static_folder` folder.
- **static_folder** (*Optional[Union[str, os.PathLike]]*) – The folder with static files that is served at `static_url_path`. Relative to the application `root_path` or an absolute path. Defaults to `'static'`.
- **static_host** (*Optional[str]*) – the host to use when adding the static route. Defaults to `None`. Required when using `host_matching=True` with a `static_folder` configured.
- **host_matching** (*bool*) – set `url_map.host_matching` attribute. Defaults to `False`.
- **subdomain_matching** (*bool*) – consider the subdomain relative to `SERVER_NAME` when matching routes. Defaults to `False`.
- **template_folder** (*Optional[str]*) – the folder that contains the templates that should be used by the application. Defaults to `'templates'` folder in the root path of the application.
- **instance_path** (*Optional[str]*) – An alternative instance path for the application. By default the folder `'instance'` next to the package or module is assumed to be the instance path.
- **instance_relative_config** (*bool*) – if set to `True` relative filenames for loading the config are assumed to be relative to the instance path instead of the application root.
- **root_path** (*Optional[str]*) – The path to the root of the application files. This should only be set manually when it can't be detected automatically, such as for namespace packages.

add_template_filter(*f*, *name=None*)

Register a custom template filter. Works exactly like the `template_filter()` decorator.

Parameters

- **name** (*Optional[str]*) – the optional name of the filter, otherwise the function name will be used.
- **f** (*Callable[[...], Any]*) –

Return type `None`

add_template_global(*f*, *name=None*)

Register a custom template global function. Works exactly like the `template_global()` decorator.

New in version 0.10.

Parameters

- **name** (*Optional[str]*) – the optional name of the global function, otherwise the function name will be used.
- **f** (*Callable[[...], Any]*) –

Return type `None`**add_template_test**(*f*, *name=None*)Register a custom template test. Works exactly like the `template_test()` decorator.

New in version 0.10.

Parameters

- **name** (*Optional[str]*) – the optional name of the test, otherwise the function name will be used.
- **f** (*Callable[[...], bool]*) –

Return type `None`**add_url_rule**(*rule*, *endpoint=None*, *view_func=None*, *provide_automatic_options=None*, ***options*)Register a rule for routing incoming requests and building URLs. The `route()` decorator is a shortcut to call this with the `view_func` argument. These are equivalent:

```
@app.route("/")
def index():
    ...
```

```
def index():
    ...

app.add_url_rule("/", view_func=index)
```

See *URL Route Registrations*.The endpoint name for the route defaults to the name of the view function if the `endpoint` parameter isn't passed. An error will be raised if a function has already been registered for the endpoint.

The methods parameter defaults to ["GET"]. HEAD is always added automatically, and OPTIONS is added automatically by default.

`view_func` does not necessarily need to be passed, but if the rule should participate in routing an endpoint name must be associated with a view function at some point with the `endpoint()` decorator.

```
app.add_url_rule("/", endpoint="index")

@app.endpoint("index")
def index():
    ...
```

If `view_func` has a `required_methods` attribute, those methods are added to the passed and automatic methods. If it has a `provide_automatic_methods` attribute, it is used as the default if the parameter is not passed.**Parameters**

- **rule** (*str*) – The URL rule string.
- **endpoint** (*Optional[str]*) – The endpoint name to associate with the rule and view function. Used when routing and building URLs. Defaults to `view_func.__name__`.
- **view_func** (*Optional[Callable]*) – The view function to associate with the endpoint name.

- **provide_automatic_options** (*Optional* [*bool*]) – Add the `OPTIONS` method and respond to `OPTIONS` requests automatically.
- **options** (*Any*) – Extra options passed to the `Rule` object.

Return type `None`

after_request(*f*)

Register a function to run after each request to this object.

The function is called with the response object, and must return a response object. This allows the functions to modify or replace the response before it is sent.

If a function raises an exception, any remaining `after_request` functions will not be called. Therefore, this should not be used for actions that must execute, such as to close resources. Use `teardown_request()` for that.

Parameters *f* (*Callable*[[*Response*], *Response*]) –

Return type *Callable*[[*Response*], *Response*]

after_request_funcs: `t.Dict[AppOrBlueprintKey, t.List[AfterRequestCallable]]`

A data structure of functions to call at the end of each request, in the format `{scope: [functions]}`. The scope key is the name of a blueprint the functions are active for, or `None` for all requests.

To register a function, use the `after_request()` decorator.

This data structure is internal. It should not be modified directly and its format may change at any time.

app_context()

Create an `AppContext`. Use as a `with` block to push the context, which will make `current_app` point at this application.

An application context is automatically pushed by `RequestContext.push()` when handling a request, and when running a CLI command. Use this to manually create a context outside of these situations.

```
with app.app_context():
    init_db()
```

See *The Application Context*.

New in version 0.9.

Return type `flask.ctx.AppContext`

app_ctx_globals_class

alias of `flask.ctx._AppCtxGlobals`

async_to_sync(*func*)

Return a sync function that will run the coroutine function.

```
result = app.async_to_sync(func)(*args, **kwargs)
```

Override this method to change how the app converts async code to be synchronously callable.

New in version 2.0.

Parameters *func* (*Callable*[[...], *Coroutine*]) –

Return type *Callable*[[...], *Any*]

auto_find_instance_path()

Tries to locate the instance path if it was not provided to the constructor of the application class. It will basically calculate the path to a folder named `instance` next to your main file or the package.

New in version 0.8.

Return type `str`

before_first_request(*f*)

Registers a function to be run before the first request to this instance of the application.

The function will be called without any arguments and its return value is ignored.

New in version 0.8.

Parameters *f* (*Callable*[[], *None*]) –

Return type *Callable*[[], *None*]

before_first_request_funcs: t.List[BeforeFirstRequestCallable]

A list of functions that will be called at the beginning of the first request to this instance. To register a function, use the `before_first_request()` decorator.

New in version 0.8.

before_request(*f*)

Register a function to run before each request.

For example, this can be used to open a database connection, or to load the logged in user from the session.

```
@app.before_request
def load_user():
    if "user_id" in session:
        g.user = db.session.get(session["user_id"])
```

The function will be called without any arguments. If it returns a non-None value, the value is handled as if it was the return value from the view, and further request handling is stopped.

Parameters *f* (*Callable*[[], *Optional*[*Union*[*Response*, *AnyStr*, *Dict*[*str*, *Any*], *Generator*[*AnyStr*, *None*, *None*], *Tuple*[*Union*[*Response*, *AnyStr*, *Dict*[*str*, *Any*], *Generator*[*AnyStr*, *None*, *None*]], *Union*[*Headers*, *Dict*[*str*, *Union*[*str*, *List*[*str*], *Tuple*[*str*, ...]]], *List*[*Tuple*[*str*, *Union*[*str*, *List*[*str*], *Tuple*[*str*, ...]]]]]], *Tuple*[*Union*[*Response*, *AnyStr*, *Dict*[*str*, *Any*], *Generator*[*AnyStr*, *None*, *None*]], *int*], *Tuple*[*Union*[*Response*, *AnyStr*, *Dict*[*str*, *Any*], *Generator*[*AnyStr*, *None*, *None*]], *int*, *Union*[*Headers*, *Dict*[*str*, *Union*[*str*, *List*[*str*], *Tuple*[*str*, ...]]]], *List*[*Tuple*[*str*, *Union*[*str*, *List*[*str*], *Tuple*[*str*, ...]]]]]], *WSGIApplication*]])

–

Return type *Callable*[[], *Optional*[*Union*[*Response*, *AnyStr*, *Dict*[*str*, *Any*], *Generator*[*AnyStr*, *None*, *None*], *Tuple*[*Union*[*Response*, *AnyStr*, *Dict*[*str*, *Any*], *Generator*[*AnyStr*, *None*, *None*]], *Union*[*Headers*, *Dict*[*str*, *Union*[*str*, *List*[*str*], *Tuple*[*str*, ...]]]], *List*[*Tuple*[*str*, *Union*[*str*, *List*[*str*], *Tuple*[*str*, ...]]]]]], *Tuple*[*Union*[*Response*, *AnyStr*, *Dict*[*str*, *Any*], *Generator*[*AnyStr*, *None*, *None*]], *int*], *Tuple*[*Union*[*Response*, *AnyStr*, *Dict*[*str*, *Any*], *Generator*[*AnyStr*, *None*, *None*]], *int*, *Union*[*Headers*, *Dict*[*str*, *Union*[*str*, *List*[*str*], *Tuple*[*str*, ...]]]], *List*[*Tuple*[*str*, *Union*[*str*, *List*[*str*], *Tuple*[*str*, ...]]]]]], *WSGIApplication*]]]

before_request_funcs: t.Dict[AppOrBlueprintKey, t.List[BeforeRequestCallable]]

A data structure of functions to call at the beginning of each request, in the format {scope: [functions]}. The scope key is the name of a blueprint the functions are active for, or None for all requests.

To register a function, use the `before_request()` decorator.

This data structure is internal. It should not be modified directly and its format may change at any time.

blueprints: t.Dict[str, 'Blueprint']

Maps registered blueprint names to blueprint objects. The dict retains the order the blueprints were registered in. Blueprints can be registered multiple times, this dict does not track how often they were attached.

New in version 0.7.

cli

The Click command group for registering CLI commands for this object. The commands are available from the `flask` command once the application has been discovered and blueprints have been registered.

config

The configuration dictionary as [Config](#). This behaves exactly like a regular dictionary but supports additional methods to load a config from files.

config_class

alias of `flask.config.Config`

context_processor(*f*)

Registers a template context processor function.

Parameters *f* (`Callable[[], Dict[str, Any]]`) –

Return type `Callable[[], Dict[str, Any]]`

create_global_jinja_loader()

Creates the loader for the Jinja2 environment. Can be used to override just the loader and keeping the rest unchanged. It's discouraged to override this function. Instead one should override the [jinja_loader\(\)](#) function instead.

The global loader dispatches between the loaders of the application and the individual blueprints.

New in version 0.7.

Return type `flask.templating.DispatchingJinjaLoader`

create_jinja_environment()

Create the Jinja environment based on [jinja_options](#) and the various Jinja-related methods of the app. Changing [jinja_options](#) after this will have no effect. Also adds Flask-related globals and filters to the environment.

Changed in version 0.11: `Environment.auto_reload` set in accordance with `TEMPLATES_AUTO_RELOAD` configuration option.

New in version 0.5.

Return type `flask.templating.Environment`

create_url_adapter(*request*)

Creates a URL adapter for the given request. The URL adapter is created at a point where the request context is not yet set up so the request is passed explicitly.

Changed in version 1.0: `SERVER_NAME` no longer implicitly enables subdomain matching. Use `subdomain_matching` instead.

Changed in version 0.9: This can now also be called without a request object when the URL adapter is created for the application context.

New in version 0.6.

Parameters *request* (`Optional[flask.wrappers.Request]`) –

Return type `Optional[werkzeug.routing.MapAdapter]`

property debug: bool

Whether debug mode is enabled. When using `flask run` to start the development server, an interactive debugger will be shown for unhandled exceptions, and the server will be reloaded when code changes. This maps to the `DEBUG` config key. This is enabled when `env` is 'development' and is overridden by the `FLASK_DEBUG` environment variable. It may not behave as expected if set in code.

Do not enable debug mode when deploying in production.

Default: True if `env` is 'development', or False otherwise.

```
default_config = {'APPLICATION_ROOT': '/', 'DEBUG': None, 'ENV': None,
'EXPLAIN_TEMPLATE_LOADING': False, 'JSONIFY_MIMETYPE': 'application/json',
'JSONIFY_PRETTYPRINT_REGULAR': False, 'JSON_AS_ASCII': True, 'JSON_SORT_KEYS':
True, 'MAX_CONTENT_LENGTH': None, 'MAX_COOKIE_SIZE': 4093,
'PERMANENT_SESSION_LIFETIME': datetime.timedelta(days=31),
'PREFERRED_URL_SCHEME': 'http', 'PRESERVE_CONTEXT_ON_EXCEPTION': None,
'PROPAGATE_EXCEPTIONS': None, 'SECRET_KEY': None, 'SEND_FILE_MAX_AGE_DEFAULT':
None, 'SERVER_NAME': None, 'SESSION_COOKIE_DOMAIN': None,
'SESSION_COOKIE_HTTPONLY': True, 'SESSION_COOKIE_NAME': 'session',
'SESSION_COOKIE_PATH': None, 'SESSION_COOKIE_SAMESITE': None,
'SESSION_COOKIE_SECURE': False, 'SESSION_REFRESH_EACH_REQUEST': True,
'TEMPLATES_AUTO_RELOAD': None, 'TESTING': False, 'TRAP_BAD_REQUEST_ERRORS': None,
'TRAP_HTTP_EXCEPTIONS': False, 'USE_X_SENDFILE': False}
```

Default configuration parameters.

delete(*rule*, ***options*)

Shortcut for [route\(\)](#) with `methods=["DELETE"]`.

New in version 2.0.

Parameters

- **rule** (*str*) –
- **options** (*Any*) –

Return type Callable

dispatch_request()

Does the request dispatching. Matches the URL and returns the return value of the view or error handler. This does not have to be a response object. In order to convert the return value to a proper response object, call [make_response\(\)](#).

Changed in version 0.7: This no longer does the exception handling, this code was moved to the new [full_dispatch_request\(\)](#).

Return type Union[[Response](#), AnyStr, Dict[str, Any], Generator[AnyStr, None, None], Tuple[Union[[Response](#), AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], Tuple[Union[[Response](#), AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int], Tuple[Union[[Response](#), AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int, Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], WSGIApplication]

do_teardown_appcontext(*exc=<object object>*)

Called right before the application context is popped.

When handling a request, the application context is popped after the request context. See [do_teardown_request\(\)](#).

This calls all functions decorated with [teardown_appcontext\(\)](#). Then the [appcontext_tearing_down](#) signal is sent.

This is called by [AppContext.pop\(\)](#).

New in version 0.9.

Parameters **exc** (*Optional*[[BaseException](#)]) –

Return type None

do_teardown_request(*exc=<object object>*)

Called after the request is dispatched and the response is returned, right before the request context is popped.

This calls all functions decorated with `teardown_request()`, and `Blueprint.teardown_request()` if a blueprint handled the request. Finally, the `request_tearing_down` signal is sent.

This is called by `RequestContext.pop()`, which may be delayed during testing to maintain access to resources.

Parameters `exc` (`Optional[BaseException]`) – An unhandled exception raised while dispatching the request. Detected from the current exception information if not passed. Passed to each teardown function.

Return type `None`

Changed in version 0.9: Added the `exc` argument.

endpoint(*endpoint*)

Decorate a view function to register it for the given endpoint. Used if a rule is added without a `view_func` with `add_url_rule()`.

```
app.add_url_rule("/ex", endpoint="example")

@app.endpoint("example")
def example():
    ...
```

Parameters `endpoint` (`str`) – The endpoint name to associate with the view function.

Return type `Callable`

ensure_sync(*func*)

Ensure that the function is synchronous for WSGI workers. Plain `def` functions are returned as-is. `async def` functions are wrapped to run and wait for the response.

Override this method to change how the app runs async views.

New in version 2.0.

Parameters `func` (`Callable`) –

Return type `Callable`

env

What environment the app is running in. Flask and extensions may enable behaviors based on the environment, such as enabling debug mode. This maps to the `ENV` config key. This is set by the `FLASK_ENV` environment variable and may not behave as expected if set in code.

Do not enable development when deploying in production.

Default: 'production'

error_handler_spec: `t.Dict[AppOrBlueprintKey, t.Dict[t.Optional[int], t.Dict[t.Type[Exception], 'ErrorHandlerCallable[Exception]']]]`

A data structure of registered error handlers, in the format `{scope: {code: {class: handler}}}`. The `scope` key is the name of a blueprint the handlers are active for, or `None` for all requests. The `code` key is the HTTP status code for `HTTPException`, or `None` for other exceptions. The innermost dictionary maps exception classes to handler functions.

To register an error handler, use the `errorhandler()` decorator.

This data structure is internal. It should not be modified directly and its format may change at any time.

errorhandler(*code_or_exception*)

Register a function to handle errors by code or exception class.

A decorator that is used to register a function given an error code. Example:

```
@app.errorhandler(404)
def page_not_found(error):
    return 'This page does not exist', 404
```

You can also register handlers for arbitrary exceptions:

```
@app.errorhandler(DatabaseError)
def special_exception_handler(error):
    return 'Database connection failed', 500
```

New in version 0.7: Use `register_error_handler()` instead of modifying `error_handler_spec` directly, for application wide error handlers.

New in version 0.7: One can now additionally also register custom exception types that do not necessarily have to be a subclass of the `HTTPException` class.

Parameters `code_or_exception` (`Union[Type[flask.typing.GenericException], int]`) – the code as integer for the handler, or an arbitrary exception

Return type `Callable[[ErrorHandlerCallable[GenericException]], ErrorHandlerCallable[GenericException]]`

extensions: `dict`

a place where extensions can store application specific state. For example this is where an extension could store database engines and similar things.

The key must match the name of the extension module. For example in case of a “Flask-Foo” extension in `flask_foo`, the key would be `'foo'`.

New in version 0.7.

finalize_request(`rv`, `from_error_handler=False`)

Given the return value from a view function this finalizes the request by converting it into a response and invoking the postprocessing functions. This is invoked for both normal request dispatching as well as error handlers.

Because this means that it might be called as a result of a failure a special safe mode is available which can be enabled with the `from_error_handler` flag. If enabled, failures in response processing will be logged and otherwise ignored.

Internal

Parameters

- `rv` (`Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int, Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], WSGIApplication, werkzeug.exceptions.HTTPException]`) –
- `from_error_handler` (`bool`) –

Return type `flask.wrappers.Response`

full_dispatch_request()

Dispatches the request and on top of that performs request pre and postprocessing as well as HTTP exception catching and error handling.

New in version 0.7.

Return type *flask.wrappers.Response*

get(*rule*, ***options*)

Shortcut for `route()` with `methods=["GET"]`.

New in version 2.0.

Parameters

- **rule** (*str*) –
- **options** (*Any*) –

Return type Callable

get_send_file_max_age(*filename*)

Used by `send_file()` to determine the `max_age` cache value for a given file path if it wasn't passed.

By default, this returns `SEND_FILE_MAX_AGE_DEFAULT` from the configuration of `current_app`. This defaults to `None`, which tells the browser to use conditional requests instead of a timed cache, which is usually preferable.

Changed in version 2.0: The default configuration is `None` instead of 12 hours.

New in version 0.9.

Parameters *filename* (*Optional[str]*) –

Return type `Optional[int]`

property `got_first_request`: `bool`

This attribute is set to `True` if the application started handling the first request.

New in version 0.8.

handle_exception(*e*)

Handle an exception that did not have an error handler associated with it, or that was raised from an error handler. This always causes a `500 InternalServerError`.

Always sends the `got_request_exception` signal.

If `propagate_exceptions` is `True`, such as in debug mode, the error will be re-raised so that the debugger can display it. Otherwise, the original exception is logged, and an `InternalServerError` is returned.

If an error handler is registered for `InternalServerError` or `500`, it will be used. For consistency, the handler will always receive the `InternalServerError`. The original unhandled exception is available as `e.original_exception`.

Changed in version 1.1.0: Always passes the `InternalServerError` instance to the handler, setting `original_exception` to the unhandled error.

Changed in version 1.1.0: `after_request` functions and other finalization is done even for the default `500` response when there is no handler.

New in version 0.3.

Parameters *e* (*Exception*) –

Return type *flask.wrappers.Response*

handle_http_exception(*e*)

Handles an HTTP exception. By default this will invoke the registered error handlers and fall back to returning the exception as response.

Changed in version 1.0.3: `RoutingException`, used internally for actions such as slash redirects during routing, is not passed to error handlers.

Changed in version 1.0: Exceptions are looked up by code *and* by MRO, so `HTTPException` subclasses can be handled with a catch-all handler for the base `HTTPException`.

New in version 0.3.

Parameters *e* (*werkzeug.exceptions.HTTPException*) –

Return type Union[werkzeug.exceptions.HTTPException, *Response*, AnyStr, Dict[str, Any], Generator[AnyStr, None, None], Tuple[Union[*Response*, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], Tuple[Union[*Response*, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int], Tuple[Union[*Response*, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int, Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], WSGIApplication]

handle_url_build_error(*error*, *endpoint*, *values*)

Handle BuildError on *url_for()*.

Parameters

- **error** (*Exception*) –
- **endpoint** (*str*) –
- **values** (*dict*) –

Return type *str*

handle_user_exception(*e*)

This method is called whenever an exception occurs that should be handled. A special case is HTTPException which is forwarded to the *handle_http_exception()* method. This function will either return a response value or reraise the exception with the same traceback.

Changed in version 1.0: Key errors raised from request data like *form* show the bad key in debug mode rather than a generic bad request message.

New in version 0.7.

Parameters *e* (*Exception*) –

Return type Union[werkzeug.exceptions.HTTPException, *Response*, AnyStr, Dict[str, Any], Generator[AnyStr, None, None], Tuple[Union[*Response*, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], Tuple[Union[*Response*, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int], Tuple[Union[*Response*, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int, Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], WSGIApplication]

property has_static_folder: **bool**

True if *static_folder* is set.

New in version 0.5.

import_name

The name of the package or module that this object belongs to. Do not change this once it is set by the constructor.

inject_url_defaults(*endpoint*, *values*)

Injects the URL defaults for the given endpoint directly into the values dictionary passed. This is used internally and automatically called on URL building.

New in version 0.7.

Parameters

- **endpoint** (*str*) –
- **values** (*dict*) –

Return type *None*

instance_path

Holds the path to the instance folder.

New in version 0.8.

iter_blueprints()

Iterates over all blueprints by the order they were registered.

New in version 0.11.

Return type `ValuesView[Blueprint]`

property jinja_env: flask.templating.Environment

The Jinja environment used to load templates.

The environment is created the first time this property is accessed. Changing *jinja_options* after that will have no effect.

jinja_environment

alias of `flask.templating.Environment`

property jinja_loader: Optional[jinja2.loaders.FileSystemLoader]

The Jinja loader for this object's templates. By default this is a class `jinja2.loaders.FileSystemLoader` to *template_folder* if it is set.

New in version 0.5.

jinja_options: dict = {}

Options that are passed to the Jinja environment in `create_jinja_environment()`. Changing these options after the environment is created (accessing *jinja_env*) will have no effect.

Changed in version 1.1.0: This is a `dict` instead of an `ImmutableDict` to allow easier configuration.

json_decoder

alias of `flask.json.JSONDecoder`

json_encoder

alias of `flask.json.JSONEncoder`

log_exception(exc_info)

Logs an exception. This is called by `handle_exception()` if debugging is disabled and right before the handler is called. The default implementation logs the exception as error on the *logger*.

New in version 0.8.

Parameters `exc_info` (`Union[Tuple[type, BaseException, types.TracebackType], Tuple[None, None, None]]`) –

Return type `None`

property logger: logging.Logger

A standard Python `Logger` for the app, with the same name as *name*.

In debug mode, the logger's `level` will be set to `DEBUG`.

If there are no handlers configured, a default handler will be added. See *Logging* for more information.

Changed in version 1.1.0: The logger takes the same name as *name* rather than hard-coding "flask.app".

Changed in version 1.0.0: Behavior was simplified. The logger is always named "flask.app". The level is only set during configuration, it doesn't check `app.debug` each time. Only one format is used, not different ones depending on `app.debug`. No handlers are removed, and a handler is only added if no handlers are already configured.

New in version 0.3.

make_config(*instance_relative=False*)

Used to create the config attribute by the Flask constructor. The *instance_relative* parameter is passed in from the constructor of Flask (there named *instance_relative_config*) and indicates if the config should be relative to the instance path or the root path of the application.

New in version 0.8.

Parameters *instance_relative* (*bool*) –

Return type *flask.config.Config*

make_default_options_response()

This method is called to create the default OPTIONS response. This can be changed through subclassing to change the default behavior of OPTIONS responses.

New in version 0.7.

Return type *flask.wrappers.Response*

make_response(*rv*)

Convert the return value from a view function to an instance of *response_class*.

Parameters *rv* (*Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int, Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], WSGIApplication]*) –

the return value from the view function. The view function must return a response. Returning None, or the view ending without returning, is not allowed. The following types are allowed for *view_rv*:

str A response object is created with the string encoded to UTF-8 as the body.

bytes A response object is created with the bytes as the body.

dict A dictionary that will be jsonify'd before being returned.

tuple Either (body, status, headers), (body, status), or (body, headers), where body is any of the other types allowed here, status is a string or an integer, and headers is a dictionary or a list of (key, value) tuples. If body is a *response_class* instance, status overwrites the exiting value and headers are extended.

response_class The object is returned unchanged.

other Response class The object is coerced to *response_class*.

callable() The function is called as a WSGI application. The result is used to create a response object.

Return type *flask.wrappers.Response*

Changed in version 0.9: Previously a tuple was interpreted as the arguments for the response object.

make_shell_context()

Returns the shell context for an interactive shell for this application. This runs all the registered shell context processors.

New in version 0.11.

Return type *dict*

property name: `str`

The name of the application. This is usually the import name with the difference that it's guessed from the run file if the import name is main. This name is used as a display name when Flask needs the name of the application. It can be set and overridden to change the value.

New in version 0.8.

open_instance_resource(*resource*, *mode='rb'*)

Opens a resource from the application's instance folder (*instance_path*). Otherwise works like *open_resource()*. Instance resources can also be opened for writing.

Parameters

- **resource** (*str*) – the name of the resource. To access resources within subfolders use forward slashes as separator.
- **mode** (*str*) – resource file opening mode, default is 'rb'.

Return type IO**open_resource**(*resource*, *mode='rb'*)

Open a resource file relative to *root_path* for reading.

For example, if the file `schema.sql` is next to the file `app.py` where the Flask app is defined, it can be opened with:

```
with app.open_resource("schema.sql") as f:
    conn.executescript(f.read())
```

Parameters

- **resource** (*str*) – Path to the resource relative to *root_path*.
- **mode** (*str*) – Open the file in this mode. Only reading is supported, valid values are "r" (or "rt") and "rb".

Return type IO**patch**(*rule*, ***options*)

Shortcut for *route()* with `methods=["PATCH"]`.

New in version 2.0.

Parameters

- **rule** (*str*) –
- **options** (*Any*) –

Return type Callable**permanent_session_lifetime**

A `timedelta` which is used to set the expiration date of a permanent session. The default is 31 days which makes a permanent session survive for roughly one month.

This attribute can also be configured from the config with the `PERMANENT_SESSION_LIFETIME` configuration key. Defaults to `timedelta(days=31)`

post(*rule*, ***options*)

Shortcut for *route()* with `methods=["POST"]`.

New in version 2.0.

Parameters

- **rule** (*str*) –
- **options** (*Any*) –

Return type Callable

preprocess_request()

Called before the request is dispatched. Calls *url_value_preprocessors* registered with the app and the current blueprint (if any). Then calls *before_request_funcs* registered with the app and the blueprint.

If any *before_request()* handler returns a non-None value, the value is handled as if it was the return value from the view, and further request handling is stopped.

Return type Optional[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int, Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], WSGIApplication]]

property preserve_context_on_exception: bool

Returns the value of the PRESERVE_CONTEXT_ON_EXCEPTION configuration value in case it's set, otherwise a sensible default is returned.

New in version 0.7.

process_response(response)

Can be overridden in order to modify the response object before it's sent to the WSGI server. By default this will call all the *after_request()* decorated functions.

Changed in version 0.5: As of Flask 0.5 the functions registered for after request execution are called in reverse order of registration.

Parameters *response* (*flask.wrappers.Response*) – a *response_class* object.

Returns a new response object or the same, has to be an instance of *response_class*.

Return type *flask.wrappers.Response*

property propagate_exceptions: bool

Returns the value of the PROPAGATE_EXCEPTIONS configuration value in case it's set, otherwise a sensible default is returned.

New in version 0.7.

put(rule, **options)

Shortcut for *route()* with *methods=["PUT"]*.

New in version 2.0.

Parameters

- **rule** (*str*) –
- **options** (*Any*) –

Return type Callable

raise_routing_exception(request)

Exceptions that are recording during routing are reraised with this method. During debug we are not reraising redirect requests for non GET, HEAD, or OPTIONS requests and we're raising a different error instead to help debug situations.

Internal

Parameters *request* (*flask.wrappers.Request*) –

Return type *te.NoReturn*

register_blueprint(blueprint, **options)

Register a *Blueprint* on the application. Keyword arguments passed to this method will override the defaults set on the blueprint.

Calls the blueprint's `register()` method after recording the blueprint in the application's `blueprints`.

Parameters

- **blueprint** (`Blueprint`) – The blueprint to register.
- **url_prefix** – Blueprint routes will be prefixed with this.
- **subdomain** – Blueprint routes will match on this subdomain.
- **url_defaults** – Blueprint routes will use these default values for view arguments.
- **options** (*Any*) – Additional keyword arguments are passed to `BlueprintSetupState`. They can be accessed in `record()` callbacks.

Return type `None`

Changed in version 2.0.1: The `name` option can be used to change the (pre-dotted) name the blueprint is registered with. This allows the same blueprint to be registered multiple times with unique names for `url_for`.

New in version 0.7.

register_error_handler(*code_or_exception, f*)

Alternative error attach function to the `errorhandler()` decorator that is more straightforward to use for non decorator usage.

New in version 0.7.

Parameters

- **code_or_exception** (`Union[Type[flask.typing.GenericException], int]`) –
- **f** (`ErrorHandlerCallable[GenericException]`) –

Return type `None`

request_class

alias of `flask.wrappers.Request`

request_context(*environ*)

Create a `RequestContext` representing a WSGI environment. Use a `with` block to push the context, which will make `request` point at this request.

See *The Request Context*.

Typically you should not call this from your own code. A request context is automatically pushed by the `wsgi_app()` when handling a request. Use `test_request_context()` to create an environment and context instead of this method.

Parameters `environ` (*dict*) – a WSGI environment

Return type `flask.ctx.RequestContext`

response_class

alias of `flask.wrappers.Response`

root_path

Absolute path to the package on the filesystem. Used to look up resources contained in the package.

route(*rule, **options*)

Decorate a view function to register it with the given URL rule and options. Calls `add_url_rule()`, which has more details about the implementation.

```
@app.route("/")
def index():
    return "Hello, World!"
```

See [URL Route Registrations](#).

The endpoint name for the route defaults to the name of the view function if the `endpoint` parameter isn't passed.

The `methods` parameter defaults to `["GET"]`. `HEAD` and `OPTIONS` are added automatically.

Parameters

- **rule** (*str*) – The URL rule string.
- **options** (*Any*) – Extra options passed to the [Rule](#) object.

Return type

Callable

run(*host=None, port=None, debug=None, load_dotenv=True, **options*)

Runs the application on a local development server.

Do not use `run()` in a production setting. It is not intended to meet security and performance requirements for a production server. Instead, see [Deployment Options](#) for WSGI server recommendations.

If the `debug` flag is set the server will automatically reload for code changes and show a debugger in case an exception happened.

If you want to run the application in debug mode, but disable the code execution on the interactive debugger, you can pass `use_eval=False` as parameter. This will keep the debugger's traceback screen active, but disable code execution.

It is not recommended to use this function for development with automatic reloading as this is badly supported. Instead you should be using the **flask** command line script's `run` support.

Keep in Mind

Flask will suppress any server error with a generic error page unless it is in debug mode. As such to enable just the interactive debugger without the code reloading, you have to invoke `run()` with `debug=True` and `use_reloader=False`. Setting `use_debugger` to `True` without being in debug mode won't catch any exceptions because there won't be any to catch.

Parameters

- **host** (*Optional[str]*) – the hostname to listen on. Set this to `'0.0.0.0'` to have the server available externally as well. Defaults to `'127.0.0.1'` or the host in the `SERVER_NAME` config variable if present.
- **port** (*Optional[int]*) – the port of the webserver. Defaults to `5000` or the port defined in the `SERVER_NAME` config variable if present.
- **debug** (*Optional[bool]*) – if given, enable or disable debug mode. See [debug](#).
- **load_dotenv** (*bool*) – Load the nearest `.env` and `.flaskenv` files to set environment variables. Will also change the working directory to the directory containing the first file found.
- **options** (*Any*) – the options to be forwarded to the underlying Werkzeug server. See [werkzeug.serving.run_simple\(\)](#) for more information.

Return type

None

Changed in version 1.0: If installed, `python-dotenv` will be used to load environment variables from `.env` and `.flaskenv` files.

If set, the `FLASK_ENV` and `FLASK_DEBUG` environment variables will override `env` and `debug`.

Threaded mode is enabled by default.

Changed in version 0.10: The default port is now picked from the `SERVER_NAME` variable.

secret_key

If a secret key is set, cryptographic components can use this to sign cookies and other things. Set this to a complex random value when you want to use the secure cookie for instance.

This attribute can also be configured from the config with the `SECRET_KEY` configuration key. Defaults to `None`.

select_jinja_autoescape(*filename*)

Returns `True` if autoescaping should be active for the given template name. If no template name is given, returns `True`.

New in version 0.5.

Parameters `filename` (*str*) –

Return type `bool`

send_file_max_age_default

A `timedelta` or number of seconds which is used as the default `max_age` for `send_file()`. The default is `None`, which tells the browser to use conditional requests instead of a timed cache.

Configured with the `SEND_FILE_MAX_AGE_DEFAULT` configuration key.

Changed in version 2.0: Defaults to `None` instead of 12 hours.

send_static_file(*filename*)

The view function used to serve files from `static_folder`. A route is automatically registered for this view at `static_url_path` if `static_folder` is set.

New in version 0.5.

Parameters `filename` (*str*) –

Return type `Response`

session_cookie_name

The secure cookie uses this for the name of the session cookie.

This attribute can also be configured from the config with the `SESSION_COOKIE_NAME` configuration key. Defaults to `'session'`

session_interface = <flask.sessions.SecureCookieSessionInterface object>

the session interface to use. By default an instance of `SecureCookieSessionInterface` is used here.

New in version 0.8.

shell_context_processor(*f*)

Registers a shell context processor function.

New in version 0.11.

Parameters `f` (*Callable*) –

Return type `Callable`

shell_context_processors: `t.List[t.Callable[[], t.Dict[str, t.Any]]]`

A list of shell context processor functions that should be run when a shell context is created.

New in version 0.11.

should_ignore_error(*error*)

This is called to figure out if an error should be ignored or not as far as the teardown system is concerned. If this function returns `True` then the teardown handlers will not be passed the error.

New in version 0.10.

Parameters `error` (*Optional[BaseException]*) –

Return type `bool`

property static_folder: Optional[str]

The absolute path to the configured static folder. `None` if no static folder is set.

property static_url_path: Optional[str]

The URL prefix that the static route will be accessible from.

If it was not configured during init, it is derived from `static_folder`.

teardown_appcontext(f)

Registers a function to be called when the application context ends. These functions are typically also called when the request context is popped.

Example:

```
ctx = app.app_context()
ctx.push()
...
ctx.pop()
```

When `ctx.pop()` is executed in the above example, the teardown functions are called just before the app context moves from the stack of active contexts. This becomes relevant if you are using such constructs in tests.

Since a request context typically also manages an application context it would also be called when you pop a request context.

When a teardown function was called because of an unhandled exception it will be passed an error object. If an `errorhandler()` is registered, it will handle the exception and the teardown will not receive it.

The return values of teardown functions are ignored.

New in version 0.9.

Parameters `f` (`Callable[[Optional[BaseException]], None]`) –

Return type `Callable[[Optional[BaseException]], None]`

teardown_appcontext_funcs: t.List[TeardownCallable]

A list of functions that are called when the application context is destroyed. Since the application context is also torn down if the request ends this is the place to store code that disconnects from databases.

New in version 0.9.

teardown_request(f)

Register a function to be run at the end of each request, regardless of whether there was an exception or not. These functions are executed when the request context is popped, even if not an actual request was performed.

Example:

```
ctx = app.test_request_context()
ctx.push()
...
ctx.pop()
```

When `ctx.pop()` is executed in the above example, the teardown functions are called just before the request context moves from the stack of active contexts. This becomes relevant if you are using such constructs in tests.

Teardown functions must avoid raising exceptions. If they execute code that might fail they will have to surround the execution of that code with `try/except` statements and log any errors.

When a teardown function was called because of an exception it will be passed an error object.

The return values of teardown functions are ignored.

Debug Note

In debug mode Flask will not tear down a request on an exception immediately. Instead it will keep it alive so that the interactive debugger can still access it. This behavior can be controlled by the `PRESERVE_CONTEXT_ON_EXCEPTION` configuration variable.

Parameters `f` (`Callable[[Optional[BaseException]], None]`) –

Return type `Callable[[Optional[BaseException]], None]`

teardown_request_funcs: `t.Dict[AppOrBlueprintKey, t.List[TeardownCallable]]`

A data structure of functions to call at the end of each request even if an exception is raised, in the format `{scope: [functions]}`. The `scope` key is the name of a blueprint the functions are active for, or `None` for all requests.

To register a function, use the `teardown_request()` decorator.

This data structure is internal. It should not be modified directly and its format may change at any time.

template_context_processors: `t.Dict[AppOrBlueprintKey, t.List[TemplateContextProcessorCallable]]`

A data structure of functions to call to pass extra context values when rendering templates, in the format `{scope: [functions]}`. The `scope` key is the name of a blueprint the functions are active for, or `None` for all requests.

To register a function, use the `context_processor()` decorator.

This data structure is internal. It should not be modified directly and its format may change at any time.

template_filter(`name=None`)

A decorator that is used to register custom template filter. You can specify a name for the filter, otherwise the function name will be used. Example:

```
@app.template_filter()
def reverse(s):
    return s[::-1]
```

Parameters `name` (`Optional[str]`) – the optional name of the filter, otherwise the function name will be used.

Return type `Callable[[Callable[...], Any], Callable[...], Any]`

template_folder

The path to the templates folder, relative to `root_path`, to add to the template loader. `None` if templates should not be added.

template_global(`name=None`)

A decorator that is used to register a custom template global function. You can specify a name for the global function, otherwise the function name will be used. Example:

```
@app.template_global()
def double(n):
    return 2 * n
```

New in version 0.10.

Parameters `name` (`Optional[str]`) – the optional name of the global function, otherwise the function name will be used.

Return type `Callable[[Callable[...], Any], Callable[...], Any]`

template_test(*name=None*)

A decorator that is used to register custom template test. You can specify a name for the test, otherwise the function name will be used. Example:

```
@app.template_test()
def is_prime(n):
    if n == 2:
        return True
    for i in range(2, int(math.ceil(math.sqrt(n))) + 1):
        if n % i == 0:
            return False
    return True
```

New in version 0.10.

Parameters *name* (*Optional[str]*) – the optional name of the test, otherwise the function name will be used.

Return type Callable[[Callable[...], bool], Callable[...], bool]

property templates_auto_reload: bool

Reload templates when they are changed. Used by `create_jinja_environment()`.

This attribute can be configured with `TEMPLATES_AUTO_RELOAD`. If not set, it will be enabled in debug mode.

New in version 1.0: This property was added but the underlying config and behavior already existed.

test_cli_runner(***kwargs*)

Create a CLI runner for testing CLI commands. See *Testing CLI Commands*.

Returns an instance of `test_cli_runner_class`, by default `FlaskCliRunner`. The Flask app object is passed as the first argument.

New in version 1.0.

Parameters *kwargs* (*Any*) –

Return type `FlaskCliRunner`

test_cli_runner_class: Optional[Type[FlaskCliRunner]] = None

The `CliRunner` subclass, by default `FlaskCliRunner` that is used by `test_cli_runner()`. Its `__init__` method should take a Flask app object as the first argument.

New in version 1.0.

test_client(*use_cookies=True*, ***kwargs*)

Creates a test client for this application. For information about unit testing head over to *Testing Flask Applications*.

Note that if you are testing for assertions or exceptions in your application code, you must set `app.testing = True` in order for the exceptions to propagate to the test client. Otherwise, the exception will be handled by the application (not visible to the test client) and the only indication of an `AssertionError` or other exception will be a 500 status code response to the test client. See the `testing` attribute. For example:

```
app.testing = True
client = app.test_client()
```

The test client can be used in a `with` block to defer the closing down of the context until the end of the `with` block. This is useful if you want to access the context locals for testing:

```
with app.test_client() as c:
    rv = c.get('/?vodka=42')
    assert request.args['vodka'] == '42'
```

Additionally, you may pass optional keyword arguments that will then be passed to the application's `test_client_class` constructor. For example:

```
from flask.testing import FlaskClient

class CustomClient(FlaskClient):
    def __init__(self, *args, **kwargs):
        self._authentication = kwargs.pop("authentication")
        super(CustomClient, self).__init__( *args, **kwargs)

app.test_client_class = CustomClient
client = app.test_client(authentication='Basic ....')
```

See `FlaskClient` for more information.

Changed in version 0.11: Added `**kwargs` to support passing additional keyword arguments to the constructor of `test_client_class`.

New in version 0.7: The `use_cookies` parameter was added as well as the ability to override the client to be used by setting the `test_client_class` attribute.

Changed in version 0.4: added support for `with` block usage for the client.

Parameters

- `use_cookies` (*bool*) –
- `kwargs` (*Any*) –

Return type `FlaskClient`

test_client_class: `Optional[Type[FlaskClient]] = None`

The `test_client()` method creates an instance of this test client class. Defaults to `FlaskClient`.

New in version 0.7.

test_request_context(**args, **kwargs*)

Create a `RequestContext` for a WSGI environment created from the given values. This is mostly useful during testing, where you may want to run a function that uses request data without dispatching a full request.

See *The Request Context*.

Use a `with` block to push the context, which will make `request` point at the request for the created environment.

```
with test_request_context(...):
    generate_report()
```

When using the shell, it may be easier to push and pop the context manually to avoid indentation.

```
ctx = app.test_request_context(...)
ctx.push()
...
ctx.pop()
```

Takes the same arguments as Werkzeug's `EnvironBuilder`, with some defaults from the application. See the linked Werkzeug docs for most of the available arguments. Flask-specific behavior is listed here.

Parameters

- `path` – URL path being requested.

- **base_url** – Base URL where the app is being served, which path is relative to. If not given, built from `PREFERRED_URL_SCHEME`, `subdomain`, `SERVER_NAME`, and `APPLICATION_ROOT`.
- **subdomain** – Subdomain name to append to `SERVER_NAME`.
- **url_scheme** – Scheme to use instead of `PREFERRED_URL_SCHEME`.
- **data** – The request body, either as a string or a dict of form keys and values.
- **json** – If given, this is serialized as JSON and passed as `data`. Also defaults `content_type` to `application/json`.
- **args** (*Any*) – other positional arguments passed to `EnvironBuilder`.
- **kwargs** (*Any*) – other keyword arguments passed to `EnvironBuilder`.

Return type `flask.ctx.RequestContext`

testing

The testing flag. Set this to `True` to enable the test mode of Flask extensions (and in the future probably also Flask itself). For example this might activate test helpers that have an additional runtime cost which should not be enabled by default.

If this is enabled and `PROPAGATE_EXCEPTIONS` is not changed from the default it's implicitly enabled.

This attribute can also be configured from the config with the `TESTING` configuration key. Defaults to `False`.

trap_http_exception(*e*)

Checks if an HTTP exception should be trapped or not. By default this will return `False` for all exceptions except for a bad request key error if `TRAP_BAD_REQUEST_ERRORS` is set to `True`. It also returns `True` if `TRAP_HTTP_EXCEPTIONS` is set to `True`.

This is called for all HTTP exceptions raised by a view function. If it returns `True` for any exception the error handler for this exception is not called and it shows up as regular exception in the traceback. This is helpful for debugging implicitly raised HTTP exceptions.

Changed in version 1.0: Bad request errors are not trapped by default in debug mode.

New in version 0.8.

Parameters *e* (*Exception*) –

Return type `bool`

try_trigger_before_first_request_functions()

Called before each request and will ensure that it triggers the `before_first_request_funcs` and only exactly once per application instance (which means process usually).

Internal

Return type `None`

update_template_context(*context*)

Update the template context with some commonly used variables. This injects `request`, `session`, `config` and `g` into the template context as well as everything template context processors want to inject. Note that the as of Flask 0.6, the original values in the context will not be overridden if a context processor decides to return a value with the same key.

Parameters *context* (*dict*) – the context as a dictionary that is updated in place to add extra variables.

Return type `None`

url_build_error_handlers: `t.List[t.Callable[[Exception, str, dict], str]]`

A list of functions that are called when `url_for()` raises a `BuildError`. Each function registered here is called with `error`, `endpoint` and `values`. If a function returns `None` or raises a `BuildError` the next function is tried.

New in version 0.9.

url_default_functions: `t.Dict[AppOrBlueprintKey, t.List[URLDefaultCallable]]`

A data structure of functions to call to modify the keyword arguments when generating URLs, in the format `{scope: [functions]}`. The scope key is the name of a blueprint the functions are active for, or `None` for all requests.

To register a function, use the `url_defaults()` decorator.

This data structure is internal. It should not be modified directly and its format may change at any time.

url_defaults(*f*)

Callback function for URL defaults for all view functions of the application. It's called with the endpoint and values and should update the values passed in place.

Parameters `f(Callable[[str, dict], None])` –

Return type `Callable[[str, dict], None]`

url_map

The `Map` for this instance. You can use this to change the routing converters after the class was created but before any routes are connected. Example:

```
from werkzeug.routing import BaseConverter

class ListConverter(BaseConverter):
    def to_python(self, value):
        return value.split(',')
    def to_url(self, values):
        return ','.join(super(ListConverter, self).to_url(value)
                        for value in values)

app = Flask(__name__)
app.url_map.converters['list'] = ListConverter
```

url_map_class

alias of `werkzeug.routing.Map`

url_rule_class

alias of `werkzeug.routing.Rule`

url_value_preprocessor(*f*)

Register a URL value preprocessor function for all view functions in the application. These functions will be called before the `before_request()` functions.

The function can modify the values captured from the matched url before they are passed to the view. For example, this can be used to pop a common language code value and place it in `g` rather than pass it to every view.

The function is passed the endpoint name and values dict. The return value is ignored.

Parameters `f(Callable[[Optional[str], Optional[dict]], None])` –

Return type `Callable[[Optional[str], Optional[dict]], None]`

url_value_preprocessors: `t.Dict[AppOrBlueprintKey, t.List[URLValuePreprocessorCallable]]`

A data structure of functions to call to modify the keyword arguments passed to the view function, in the format `{scope: [functions]}`. The scope key is the name of a blueprint the functions are active for, or `None` for all requests.

To register a function, use the `url_value_preprocessor()` decorator.

This data structure is internal. It should not be modified directly and its format may change at any time.

use_x_sendfile

Enable this if you want to use the X-Sendfile feature. Keep in mind that the server has to support this. This only affects files sent with the `send_file()` method.

New in version 0.2.

This attribute can also be configured from the config with the `USE_X_SENDFILE` configuration key. Defaults to `False`.

view_functions: t.Dict[str, t.Callable]

A dictionary mapping endpoint names to view functions.

To register a view function, use the `route()` decorator.

This data structure is internal. It should not be modified directly and its format may change at any time.

wsgi_app(environ, start_response)

The actual WSGI application. This is not implemented in `__call__()` so that middlewares can be applied without losing a reference to the app object. Instead of doing this:

```
app = MyMiddleware(app)
```

It's a better idea to do this instead:

```
app.wsgi_app = MyMiddleware(app.wsgi_app)
```

Then you still have the original application object around and can continue to call methods on it.

Changed in version 0.7: Teardown events for the request and app contexts are called even if an unhandled error occurs. Other events may not be called depending on when an error occurs during dispatch. See [Callbacks and Errors](#).

Parameters

- **environ** (*dict*) – A WSGI environment.
- **start_response** (*Callable*) – A callable accepting a status code, a list of headers, and an optional exception context to start the response.

Return type Any

2.1.2 Blueprint Objects

```
class flask.Blueprint(name, import_name, static_folder=None, static_url_path=None,
                    template_folder=None, url_prefix=None, subdomain=None, url_defaults=None,
                    root_path=None, cli_group=<object object>)
```

Represents a blueprint, a collection of routes and other app-related functions that can be registered on a real application later.

A blueprint is an object that allows defining application functions without requiring an application object ahead of time. It uses the same decorators as *Flask*, but defers the need for an application by recording them for later registration.

Decorating a function with a blueprint creates a deferred function that is called with *BlueprintSetupState* when the blueprint is registered on an application.

See [Modular Applications with Blueprints](#) for more information.

Parameters

- **name** (*str*) – The name of the blueprint. Will be prepended to each endpoint name.
- **import_name** (*str*) – The name of the blueprint package, usually `__name__`. This helps locate the `root_path` for the blueprint.

- **static_folder** (*Optional[Union[str, os.PathLike]]*) – A folder with static files that should be served by the blueprint’s static route. The path is relative to the blueprint’s root path. Blueprint static files are disabled by default.
- **static_url_path** (*Optional[str]*) – The url to serve static files from. Defaults to `static_folder`. If the blueprint does not have a `url_prefix`, the app’s static route will take precedence, and the blueprint’s static files won’t be accessible.
- **template_folder** (*Optional[str]*) – A folder with templates that should be added to the app’s template search path. The path is relative to the blueprint’s root path. Blueprint templates are disabled by default. Blueprint templates have a lower precedence than those in the app’s templates folder.
- **url_prefix** (*Optional[str]*) – A path to prepend to all of the blueprint’s URLs, to make them distinct from the rest of the app’s routes.
- **subdomain** (*Optional[str]*) – A subdomain that blueprint routes will match on by default.
- **url_defaults** (*Optional[dict]*) – A dict of default values that blueprint routes will receive by default.
- **root_path** (*Optional[str]*) – By default, the blueprint will automatically set this based on `import_name`. In certain situations this automatic detection can fail, so the path can be specified manually instead.
- **cli_group** (*Optional[str]*) –

Changed in version 1.1.0: Blueprints have a `cli_group` to register nested CLI commands. The `cli_group` parameter controls the name of the group under the `flask` command.

New in version 0.7.

add_app_template_filter(*f, name=None*)

Register a custom template filter, available application wide. Like `Flask.add_template_filter()` but for a blueprint. Works exactly like the `app_template_filter()` decorator.

Parameters

- **name** (*Optional[str]*) – the optional name of the filter, otherwise the function name will be used.
- **f** (*Callable[[...], Any]*) –

Return type `None`

add_app_template_global(*f, name=None*)

Register a custom template global, available application wide. Like `Flask.add_template_global()` but for a blueprint. Works exactly like the `app_template_global()` decorator.

New in version 0.10.

Parameters

- **name** (*Optional[str]*) – the optional name of the global, otherwise the function name will be used.
- **f** (*Callable[[...], Any]*) –

Return type `None`

add_app_template_test(*f, name=None*)

Register a custom template test, available application wide. Like `Flask.add_template_test()` but for a blueprint. Works exactly like the `app_template_test()` decorator.

New in version 0.10.

Parameters

- **name** (*Optional*[*str*]) – the optional name of the test, otherwise the function name will be used.
- **f** (*Callable*[[...], *bool*]) –

Return type *None*

add_url_rule(*rule*, *endpoint=None*, *view_func=None*, *provide_automatic_options=None*, ***options*)

Like *Flask.add_url_rule()* but for a blueprint. The endpoint for the *url_for()* function is prefixed with the name of the blueprint.

Parameters

- **rule** (*str*) –
- **endpoint** (*Optional*[*str*]) –
- **view_func** (*Optional*[*Callable*]) –
- **provide_automatic_options** (*Optional*[*bool*]) –
- **options** (*Any*) –

Return type *None*

after_app_request(*f*)

Like *Flask.after_request()* but for a blueprint. Such a function is executed after each request, even if outside of the blueprint.

Parameters **f** (*Callable*[[*Response*], *Response*]) –

Return type *Callable*[[*Response*], *Response*]

after_request(*f*)

Register a function to run after each request to this object.

The function is called with the response object, and must return a response object. This allows the functions to modify or replace the response before it is sent.

If a function raises an exception, any remaining *after_request* functions will not be called. Therefore, this should not be used for actions that must execute, such as to close resources. Use *teardown_request()* for that.

Parameters **f** (*Callable*[[*Response*], *Response*]) –

Return type *Callable*[[*Response*], *Response*]

after_request_funcs: *t.Dict*[*AppOrBlueprintKey*, *t.List*[*AfterRequestCallable*]]

A data structure of functions to call at the end of each request, in the format {scope: [functions]}. The scope key is the name of a blueprint the functions are active for, or *None* for all requests.

To register a function, use the *after_request()* decorator.

This data structure is internal. It should not be modified directly and its format may change at any time.

app_context_processor(*f*)

Like *Flask.context_processor()* but for a blueprint. Such a function is executed each request, even if outside of the blueprint.

Parameters **f** (*Callable*[[], *Dict*[*str*, *Any*]]) –

Return type *Callable*[[], *Dict*[*str*, *Any*]]

app_errorhandler(*code*)

Like *Flask.errorhandler()* but for a blueprint. This handler is used for all requests, even if outside of the blueprint.

Parameters **code** (*Union*[*Type*[*Exception*], *int*]) –

Return type *Callable*

app_template_filter(*name=None*)

Register a custom template filter, available application wide. Like `Flask.template_filter()` but for a blueprint.

Parameters *name* (*Optional [str]*) – the optional name of the filter, otherwise the function name will be used.

Return type Callable[[Callable[[...], Any]], Callable[[...], Any]]

app_template_global(*name=None*)

Register a custom template global, available application wide. Like `Flask.template_global()` but for a blueprint.

New in version 0.10.

Parameters *name* (*Optional [str]*) – the optional name of the global, otherwise the function name will be used.

Return type Callable[[Callable[[...], Any]], Callable[[...], Any]]

app_template_test(*name=None*)

Register a custom template test, available application wide. Like `Flask.template_test()` but for a blueprint.

New in version 0.10.

Parameters *name* (*Optional [str]*) – the optional name of the test, otherwise the function name will be used.

Return type Callable[[Callable[[...], bool]], Callable[[...], bool]]

app_url_defaults(*f*)

Same as `url_defaults()` but application wide.

Parameters *f* (*Callable[[str, dict], None]*) –

Return type Callable[[str, dict], None]

app_url_value_preprocessor(*f*)

Same as `url_value_preprocessor()` but application wide.

Parameters *f* (*Callable[[Optional[str], Optional[dict]], None]*) –

Return type Callable[[Optional[str], Optional[dict]], None]

before_app_first_request(*f*)

Like `Flask.before_first_request()`. Such a function is executed before the first request to the application.

Parameters *f* (*Callable[[], None]*) –

Return type Callable[[], None]

before_app_request(*f*)

Like `Flask.before_request()`. Such a function is executed before each request, even if outside of a blueprint.

Parameters *f* (*Callable[[], Optional[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None], Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int, Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], WSGIApplication]]]*)

–

Return type Callable[[], Optional[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int, Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], WS-GIApplication]]]

before_request(*f*)

Register a function to run before each request.

For example, this can be used to open a database connection, or to load the logged in user from the session.

```
@app.before_request
def load_user():
    if "user_id" in session:
        g.user = db.session.get(session["user_id"])
```

The function will be called without any arguments. If it returns a non-None value, the value is handled as if it was the return value from the view, and further request handling is stopped.

Parameters *f* (Callable[[], Optional[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int, Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], WS-GIApplication]]])

Return type Callable[[], Optional[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int, Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], WS-GIApplication]]]

before_request_funcs: t.Dict[AppOrBlueprintKey, t.List[BeforeRequestCallable]]

A data structure of functions to call at the beginning of each request, in the format {scope: [functions]}. The scope key is the name of a blueprint the functions are active for, or None for all requests.

To register a function, use the `before_request()` decorator.

This data structure is internal. It should not be modified directly and its format may change at any time.

cli

The Click command group for registering CLI commands for this object. The commands are available from the `flask` command once the application has been discovered and blueprints have been registered.

context_processor(*f*)

Registers a template context processor function.

Parameters *f* (Callable[[], Dict[str, Any]]) –

Return type Callable[[], Dict[str, Any]]

delete(*rule*, ***options*)

Shortcut for `route()` with `methods=["DELETE"]`.

New in version 2.0.

Parameters

- **rule** (*str*) –
- **options** (*Any*) –

Return type Callable

endpoint(*endpoint*)

Decorate a view function to register it for the given endpoint. Used if a rule is added without a `view_func` with `add_url_rule()`.

```
app.add_url_rule("/ex", endpoint="example")

@app.endpoint("example")
def example():
    ...
```

Parameters **endpoint** (*str*) – The endpoint name to associate with the view function.

Return type Callable

error_handler_spec: `t.Dict[AppOrBlueprintKey, t.Dict[t.Optional[int], t.Dict[t.Type[Exception], 'ErrorHandlerCallable[Exception]']]]`

A data structure of registered error handlers, in the format `{scope: {code: {class: handler}}}`. The `scope` key is the name of a blueprint the handlers are active for, or `None` for all requests. The `code` key is the HTTP status code for `HTTPException`, or `None` for other exceptions. The innermost dictionary maps exception classes to handler functions.

To register an error handler, use the `errorhandler()` decorator.

This data structure is internal. It should not be modified directly and its format may change at any time.

errorhandler(*code_or_exception*)

Register a function to handle errors by code or exception class.

A decorator that is used to register a function given an error code. Example:

```
@app.errorhandler(404)
def page_not_found(error):
    return 'This page does not exist', 404
```

You can also register handlers for arbitrary exceptions:

```
@app.errorhandler(DatabaseError)
def special_exception_handler(error):
    return 'Database connection failed', 500
```

New in version 0.7: Use `register_error_handler()` instead of modifying `error_handler_spec` directly, for application wide error handlers.

New in version 0.7: One can now additionally also register custom exception types that do not necessarily have to be a subclass of the `HTTPException` class.

Parameters **code_or_exception** (`Union[Type[flask.typing.GenericException], int]`) – the code as integer for the handler, or an arbitrary exception

Return type `Callable[[ErrorHandlerCallable[GenericException]], ErrorHandlerCallable[GenericException]]`

get(*rule*, ***options*)

Shortcut for `route()` with `methods=["GET"]`.

New in version 2.0.

Parameters

- **rule** (*str*) –
- **options** (*Any*) –

Return type Callable

get_send_file_max_age(*filename*)

Used by `send_file()` to determine the `max_age` cache value for a given file path if it wasn't passed.

By default, this returns `SEND_FILE_MAX_AGE_DEFAULT` from the configuration of `current_app`. This defaults to `None`, which tells the browser to use conditional requests instead of a timed cache, which is usually preferable.

Changed in version 2.0: The default configuration is `None` instead of 12 hours.

New in version 0.9.

Parameters *filename* (*Optional[str]*) –

Return type *Optional[int]*

property has_static_folder: `bool`

True if `static_folder` is set.

New in version 0.5.

import_name

The name of the package or module that this object belongs to. Do not change this once it is set by the constructor.

property jinja_loader: `Optional[jinja2.loaders.FileSystemLoader]`

The Jinja loader for this object's templates. By default this is a class `jinja2.loaders.FileSystemLoader` to `template_folder` if it is set.

New in version 0.5.

json_decoder: `Optional[Type[json.decoder.JSONDecoder]] = None`

Blueprint local JSON decoder class to use. Set to `None` to use the app's `json_decoder`.

json_encoder: `Optional[Type[json.encoder.JSONEncoder]] = None`

Blueprint local JSON encoder class to use. Set to `None` to use the app's `json_encoder`.

make_setup_state(*app*, *options*, *first_registration=False*)

Creates an instance of `BlueprintSetupState()` object that is later passed to the register callback functions. Subclasses can override this to return a subclass of the setup state.

Parameters

- **app** (`Flask`) –
- **options** (*dict*) –
- **first_registration** (*bool*) –

Return type `flask.blueprints.BlueprintSetupState`

open_resource(*resource*, *mode='rb'*)

Open a resource file relative to `root_path` for reading.

For example, if the file `schema.sql` is next to the file `app.py` where the Flask app is defined, it can be opened with:

```
with app.open_resource("schema.sql") as f:
    conn.executescript(f.read())
```

Parameters

- **resource** (*str*) – Path to the resource relative to *root_path*.
- **mode** (*str*) – Open the file in this mode. Only reading is supported, valid values are “r” (or “rt”) and “rb”.

Return type IO**patch**(*rule*, ***options*)Shortcut for `route()` with `methods=["PATCH"]`.

New in version 2.0.

Parameters

- **rule** (*str*) –
- **options** (*Any*) –

Return type Callable**post**(*rule*, ***options*)Shortcut for `route()` with `methods=["POST"]`.

New in version 2.0.

Parameters

- **rule** (*str*) –
- **options** (*Any*) –

Return type Callable**put**(*rule*, ***options*)Shortcut for `route()` with `methods=["PUT"]`.

New in version 2.0.

Parameters

- **rule** (*str*) –
- **options** (*Any*) –

Return type Callable**record**(*func*)Registers a function that is called when the blueprint is registered on the application. This function is called with the state as argument as returned by the `make_setup_state()` method.**Parameters** *func* (*Callable*) –**Return type** None**record_once**(*func*)Works like `record()` but wraps the function in another function that will ensure the function is only called once. If the blueprint is registered a second time on the application, the function passed is not called.**Parameters** *func* (*Callable*) –**Return type** None**register**(*app*, *options*)Called by `Flask.register_blueprint()` to register all views and callbacks registered on the blueprint with the application. Creates a `BlueprintSetupState` and calls each `record()` callback with it.**Parameters**

- **app** (*Flask*) – The application this blueprint is being registered with.

- **options** (*dict*) – Keyword arguments forwarded from `register_blueprint()`.

Return type `None`

Changed in version 2.0.1: Nested blueprints are registered with their dotted name. This allows different blueprints with the same name to be nested at different locations.

Changed in version 2.0.1: The `name` option can be used to change the (pre-dotted) name the blueprint is registered with. This allows the same blueprint to be registered multiple times with unique names for `url_for`.

Changed in version 2.0.1: Registering the same blueprint with the same name multiple times is deprecated and will become an error in Flask 2.1.

register_blueprint(*blueprint*, ***options*)

Register a [Blueprint](#) on this blueprint. Keyword arguments passed to this method will override the defaults set on the blueprint.

Changed in version 2.0.1: The `name` option can be used to change the (pre-dotted) name the blueprint is registered with. This allows the same blueprint to be registered multiple times with unique names for `url_for`.

New in version 2.0.

Parameters

- **blueprint** (`flask.blueprints.Blueprint`) –
- **options** (*Any*) –

Return type `None`

register_error_handler(*code_or_exception*, *f*)

Alternative error attach function to the `errorhandler()` decorator that is more straightforward to use for non decorator usage.

New in version 0.7.

Parameters

- **code_or_exception** (`Union[Type[flask.typing.GenericException], int]`) –
- **f** (`ErrorHandlerCallable[GenericException]`) –

Return type `None`

root_path

Absolute path to the package on the filesystem. Used to look up resources contained in the package.

route(*rule*, ***options*)

Decorate a view function to register it with the given URL rule and options. Calls `add_url_rule()`, which has more details about the implementation.

```
@app.route("/")
def index():
    return "Hello, World!"
```

See [URL Route Registrations](#).

The endpoint name for the route defaults to the name of the view function if the `endpoint` parameter isn't passed.

The `methods` parameter defaults to `["GET"]`. HEAD and OPTIONS are added automatically.

Parameters

- **rule** (*str*) – The URL rule string.
- **options** (*Any*) – Extra options passed to the `Rule` object.

Return type Callable

send_static_file(*filename*)

The view function used to serve files from *static_folder*. A route is automatically registered for this view at *static_url_path* if *static_folder* is set.

New in version 0.5.

Parameters *filename* (*str*) –

Return type *Response*

property static_folder: Optional[*str*]

The absolute path to the configured static folder. None if no static folder is set.

property static_url_path: Optional[*str*]

The URL prefix that the static route will be accessible from.

If it was not configured during init, it is derived from *static_folder*.

teardown_app_request(*f*)

Like *Flask.teardown_request()* but for a blueprint. Such a function is executed when tearing down each request, even if outside of the blueprint.

Parameters *f* (Callable[[Optional[BaseException]], None]) –

Return type Callable[[Optional[BaseException]], None]

teardown_request(*f*)

Register a function to be run at the end of each request, regardless of whether there was an exception or not. These functions are executed when the request context is popped, even if not an actual request was performed.

Example:

```
ctx = app.test_request_context()
ctx.push()
...
ctx.pop()
```

When *ctx.pop()* is executed in the above example, the teardown functions are called just before the request context moves from the stack of active contexts. This becomes relevant if you are using such constructs in tests.

Teardown functions must avoid raising exceptions. If they execute code that might fail they will have to surround the execution of that code with try/except statements and log any errors.

When a teardown function was called because of an exception it will be passed an error object.

The return values of teardown functions are ignored.

Debug Note

In debug mode Flask will not tear down a request on an exception immediately. Instead it will keep it alive so that the interactive debugger can still access it. This behavior can be controlled by the `PRESERVE_CONTEXT_ON_EXCEPTION` configuration variable.

Parameters *f* (Callable[[Optional[BaseException]], None]) –

Return type Callable[[Optional[BaseException]], None]

teardown_request_funcs: t.Dict[AppOrBlueprintKey, t.List[TeardownCallable]]

A data structure of functions to call at the end of each request even if an exception is raised, in the format {scope: [functions]}. The scope key is the name of a blueprint the functions are active for, or None for all requests.

To register a function, use the `teardown_request()` decorator.

This data structure is internal. It should not be modified directly and its format may change at any time.

template_context_processors: `t.Dict[AppOrBlueprintKey, t.List[TemplateContextProcessorCallable]]`

A data structure of functions to call to pass extra context values when rendering templates, in the format `{scope: [functions]}`. The `scope` key is the name of a blueprint the functions are active for, or `None` for all requests.

To register a function, use the `context_processor()` decorator.

This data structure is internal. It should not be modified directly and its format may change at any time.

template_folder

The path to the templates folder, relative to `root_path`, to add to the template loader. `None` if templates should not be added.

url_default_functions: `t.Dict[AppOrBlueprintKey, t.List[URLDefaultCallable]]`

A data structure of functions to call to modify the keyword arguments when generating URLs, in the format `{scope: [functions]}`. The `scope` key is the name of a blueprint the functions are active for, or `None` for all requests.

To register a function, use the `url_defaults()` decorator.

This data structure is internal. It should not be modified directly and its format may change at any time.

url_defaults(*f*)

Callback function for URL defaults for all view functions of the application. It's called with the endpoint and values and should update the values passed in place.

Parameters *f* (`Callable[[str, dict], None]`) –

Return type `Callable[[str, dict], None]`

url_value_preprocessor(*f*)

Register a URL value preprocessor function for all view functions in the application. These functions will be called before the `before_request()` functions.

The function can modify the values captured from the matched url before they are passed to the view. For example, this can be used to pop a common language code value and place it in `g` rather than pass it to every view.

The function is passed the endpoint name and values dict. The return value is ignored.

Parameters *f* (`Callable[[Optional[str], Optional[dict]], None]`) –

Return type `Callable[[Optional[str], Optional[dict]], None]`

url_value_preprocessors: `t.Dict[AppOrBlueprintKey, t.List[URLValuePreprocessorCallable]]`

A data structure of functions to call to modify the keyword arguments passed to the view function, in the format `{scope: [functions]}`. The `scope` key is the name of a blueprint the functions are active for, or `None` for all requests.

To register a function, use the `url_value_preprocessor()` decorator.

This data structure is internal. It should not be modified directly and its format may change at any time.

view_functions: `t.Dict[str, t.Callable]`

A dictionary mapping endpoint names to view functions.

To register a view function, use the `route()` decorator.

This data structure is internal. It should not be modified directly and its format may change at any time.

2.1.3 Incoming Request Data

class flask.Request(*environ*, *populate_request=True*, *shallow=False*)

The request object used by default in Flask. Remembers the matched endpoint and view arguments.

It is what ends up as `request`. If you want to replace the request object used you can subclass this and set `request_class` to your subclass.

The request object is a `Request` subclass and provides all of the attributes Werkzeug defines plus a few Flask specific ones.

Parameters

- **environ** (*WSGIEnvironment*) –
- **populate_request** (*bool*) –
- **shallow** (*bool*) –

Return type None

property `accept_charsets`: `werkzeug.datastructures.CharsetAccept`

List of charsets this client supports as `CharsetAccept` object.

property `accept_encodings`: `werkzeug.datastructures.Accept`

List of encodings this client accepts. Encodings in a HTTP term are compression encodings such as gzip. For charsets have a look at `accept_charset`.

property `accept_languages`: `werkzeug.datastructures.LanguageAccept`

List of languages this client accepts as `LanguageAccept` object.

property `accept_mimetypes`: `werkzeug.datastructures.MIMEAccept`

List of mimetypes this client supports as `MIMEAccept` object.

access_control_request_headers

Sent with a preflight request to indicate which headers will be sent with the cross origin request. Set `access_control_allow_headers` on the response to indicate which headers are allowed.

access_control_request_method

Sent with a preflight request to indicate which method will be used for the cross origin request. Set `access_control_allow_methods` on the response to indicate which methods are allowed.

property `access_route`: `List[str]`

If a forwarded header exists this is a list of all ip addresses from the client ip to the last proxy server.

classmethod `application(f)`

Decorate a function as responder that accepts the request as the last argument. This works like the `responder()` decorator but the function is passed the request object as the last argument and the request object will be closed automatically:

```
@Request.application
def my_wsgi_app(request):
    return Response('Hello World!')
```

As of Werkzeug 0.14 HTTP exceptions are automatically caught and converted to responses instead of failing.

Parameters `f` (*Callable[[Request], WSGIApplication]*) – the WSGI callable to decorate

Returns a new WSGI callable

Return type `WSGIApplication`

property `args`: `werkzeug.datastructures.MultiDict[str, str]`

The parsed URL parameters (the part in the URL after the question mark).

By default an `ImmutableMultiDict` is returned from this function. This can be changed by setting `parameter_storage_class` to a different type. This might be necessary if the order of the form data is important.

property authorization: `Optional[werkzeug.datastructures.Authorization]`

The `Authorization` object in parsed form.

property base_url: `str`

Like `url` but without the query string.

property blueprint: `Optional[str]`

The registered name of the current blueprint.

This will be `None` if the endpoint is not part of a blueprint, or if URL matching failed or has not been performed yet.

This does not necessarily match the name the blueprint was created with. It may have been nested, or registered with a different name.

property blueprints: `List[str]`

The registered names of the current blueprint upwards through parent blueprints.

This will be an empty list if there is no current blueprint, or if URL matching failed.

New in version 2.0.1.

property cache_control: `werkzeug.datastructures.RequestCacheControl`

A `RequestCacheControl` object for the incoming cache control headers.

close()

Closes associated resources of this request object. This closes all file handles explicitly. You can also use the request object in a `with` statement which will automatically close it.

New in version 0.9.

Return type `None`

content_encoding

The Content-Encoding entity-header field is used as a modifier to the media-type. When present, its value indicates what additional content codings have been applied to the entity-body, and thus what decoding mechanisms must be applied in order to obtain the media-type referenced by the Content-Type header field.

New in version 0.9.

property content_length: `Optional[int]`

The Content-Length entity-header field indicates the size of the entity-body in bytes or, in the case of the HEAD method, the size of the entity-body that would have been sent had the request been a GET.

content_md5

The Content-MD5 entity-header field, as defined in RFC 1864, is an MD5 digest of the entity-body for the purpose of providing an end-to-end message integrity check (MIC) of the entity-body. (Note: a MIC is good for detecting accidental modification of the entity-body in transit, but is not proof against malicious attacks.)

New in version 0.9.

content_type

The Content-Type entity-header field indicates the media type of the entity-body sent to the recipient or, in the case of the HEAD method, the media type that would have been sent had the request been a GET.

property cookies: `werkzeug.datastructures.ImmutableMultiDict[str, str]`

A `dict` with the contents of all cookies transmitted with the request.

property data: `bytes`

Contains the incoming request data as string in case it came with a mimetype Werkzeug does not handle.

date

The Date general-header field represents the date and time at which the message was originated, having the same semantics as orig-date in RFC 822.

Changed in version 2.0: The datetime object is timezone-aware.

dict_storage_class

alias of `werkzeug.datastructures.ImmutableMultiDict`

property endpoint: Optional[str]

The endpoint that matched the request URL.

This will be None if matching failed or has not been performed yet.

This in combination with `view_args` can be used to reconstruct the same URL or a modified URL.

environ: WSGIEnvironment

The WSGI environment containing HTTP headers and information from the WSGI server.

property files: werkzeug.datastructures.ImmutableMultiDict[str, werkzeug.datastructures.FileStorage]

`MultiDict` object containing all uploaded files. Each key in `files` is the name from the `<input type="file" name=">`. Each value in `files` is a Werkzeug `FileStorage` object.

It basically behaves like a standard file object you know from Python, with the difference that it also has a `save()` function that can store the file on the filesystem.

Note that `files` will only contain data if the request method was POST, PUT or PATCH and the `<form>` that posted to the request had `enctype="multipart/form-data"`. It will be empty otherwise.

See the `MultiDict / FileStorage` documentation for more details about the used data structure.

property form: werkzeug.datastructures.ImmutableMultiDict[str, str]

The form parameters. By default an `ImmutableMultiDict` is returned from this function. This can be changed by setting `parameter_storage_class` to a different type. This might be necessary if the order of the form data is important.

Please keep in mind that file uploads will not end up here, but instead in the `files` attribute.

Changed in version 0.9: Previous to Werkzeug 0.9 this would only contain form data for POST and PUT requests.

form_data_parser_class

alias of `werkzeug.formparser.FormDataParser`

classmethod from_values(*args, **kwargs)

Create a new request object based on the values provided. If `environ` is given missing values are filled from there. This method is useful for small scripts when you need to simulate a request from an URL. Do not use this method for unittesting, there is a full featured client object (`Client`) that allows to create multipart requests, support for cookies etc.

This accepts the same options as the `EnvironBuilder`.

Changed in version 0.5: This method now accepts the same arguments as `EnvironBuilder`. Because of this the `environ` parameter is now called `environ_overrides`.

Returns request object

Parameters

- `args` (*Any*) –
- `kwargs` (*Any*) –

Return type `werkzeug.wrappers.request.Request`

property full_path: str

Requested path, including the query string.

get_data(*cache=True, as_text=False, parse_form_data=False*)

This reads the buffered incoming data from the client into one bytes object. By default this is cached but that behavior can be changed by setting *cache* to *False*.

Usually it's a bad idea to call this method without checking the content length first as a client could send dozens of megabytes or more to cause memory problems on the server.

Note that if the form data was already parsed this method will not return anything as form data parsing does not cache the data like this method does. To implicitly invoke form data parsing function set *parse_form_data* to *True*. When this is done the return value of this method will be an empty string if the form parser handles the data. This generally is not necessary as if the whole data is cached (which is the default) the form parser will use the cached data to parse the form data. Please be generally aware of checking the content length first in any case before calling this method to avoid exhausting server memory.

If *as_text* is set to *True* the return value will be a decoded string.

New in version 0.9.

Parameters

- **cache** (*bool*) –
- **as_text** (*bool*) –
- **parse_form_data** (*bool*) –

Return type Union[bytes, str]

get_json(*force=False, silent=False, cache=True*)

Parse *data* as JSON.

If the mimetype does not indicate JSON (*application/json*, see *is_json*), this returns *None*.

If parsing fails, *on_json_loading_failed()* is called and its return value is used as the return value.

Parameters

- **force** (*bool*) – Ignore the mimetype and always try to parse JSON.
- **silent** (*bool*) – Silence parsing errors and return *None* instead.
- **cache** (*bool*) – Store the parsed JSON to return for subsequent calls.

Return type Optional[Any]

headers

The headers received with the request.

property host: **str**

The host name the request was made to, including the port if it's non-standard. Validated with *trusted_hosts*.

property host_url: **str**

The request URL scheme and host only.

property if_match: **werkzeug.datastructures.ETags**

An object containing all the etags in the *If-Match* header.

Return type ETags

property if_modified_since: **Optional[datetime.datetime]**

The parsed *If-Modified-Since* header as a datetime object.

Changed in version 2.0: The datetime object is timezone-aware.

property if_none_match: **werkzeug.datastructures.ETags**

An object containing all the etags in the *If-None-Match* header.

Return type ETags

property if_range: `werkzeug.datastructures.IfRange`

The parsed If-Range header.

Changed in version 2.0: `IfRange.date` is timezone-aware.

New in version 0.7.

property if_unmodified_since: `Optional[datetime.datetime]`

The parsed *If-Unmodified-Since* header as a datetime object.

Changed in version 2.0: The datetime object is timezone-aware.

input_stream

The WSGI input stream.

In general it's a bad idea to use this one because you can easily read past the boundary. Use the `stream` instead.

property is_json: `bool`

Check if the mimetype indicates JSON data, either `application/json` or `application/*+json`.

is_multiprocess

boolean that is `True` if the application is served by a WSGI server that spawns multiple processes.

is_multithread

boolean that is `True` if the application is served by a multithreaded WSGI server.

is_run_once

boolean that is `True` if the application will be executed only once in a process lifetime. This is the case for CGI for example, but it's not guaranteed that the execution only happens one time.

property is_secure: `bool`

True if the request was made with a secure protocol (HTTPS or WSS).

property json: `Optional[Any]`

The parsed JSON data if `mimetype` indicates JSON (`application/json`, see `is_json`).

Calls `get_json()` with default arguments.

list_storage_class

alias of `werkzeug.datastructures.ImmutableList`

make_form_data_parser()

Creates the form data parser. Instantiates the `form_data_parser_class` with some parameters.

New in version 0.8.

Return type `werkzeug.formparser.FormDataParser`

property max_content_length: `Optional[int]`

Read-only view of the `MAX_CONTENT_LENGTH` config key.

max_forwards

The Max-Forwards request-header field provides a mechanism with the `TRACE` and `OPTIONS` methods to limit the number of proxies or gateways that can forward the request to the next inbound server.

method

The method the request was made with, such as `GET`.

property mimetype: `str`

Like `content_type`, but without parameters (eg, without charset, type etc.) and always lowercase. For example if the content type is `text/HTML; charset=utf-8` the mimetype would be `'text/html'`.

property mimetype_params: `Dict[str, str]`

The mimetype parameters as dict. For example if the content type is `text/html; charset=utf-8` the params would be `{'charset': 'utf-8'}`.

on_json_loading_failed(*e*)

Called if `get_json()` parsing fails and isn't silenced. If this method returns a value, it is used as the return value for `get_json()`. The default implementation raises `BadRequest`.

Parameters `e` (*Exception*) –

Return type `te.NoReturn`

origin

The host that the request originated from. Set `access_control_allow_origin` on the response to indicate which origins are allowed.

parameter_storage_class

alias of `werkzeug.datastructures.ImmutableMultiDict`

path

The path part of the URL after `root_path`. This is the path used for routing within the application.

property pragma: `werkzeug.datastructures.HeaderSet`

The Pragma general-header field is used to include implementation-specific directives that might apply to any recipient along the request/response chain. All pragma directives specify optional behavior from the viewpoint of the protocol; however, some systems MAY require that behavior be consistent with the directives.

query_string

The part of the URL after the “?”. This is the raw value, use `args` for the parsed values.

property range: `Optional[werkzeug.datastructures.Range]`

The parsed *Range* header.

New in version 0.7.

Return type `Range`

referrer

The Referer[sic] request-header field allows the client to specify, for the server’s benefit, the address (URI) of the resource from which the Request-URI was obtained (the “referrer”, although the header field is misspelled).

remote_addr

The address of the client sending the request.

remote_user

If the server supports user authentication, and the script is protected, this attribute contains the username the user has authenticated as.

root_path

The prefix that the application is mounted under, without a trailing slash. `path` comes after this.

property root_url: `str`

The request URL scheme, host, and root path. This is the root that the application is accessed from.

routing_exception: `Optional[Exception] = None`

If matching the URL failed, this is the exception that will be raised / was raised as part of the request handling. This is usually a `NotFound` exception or something similar.

scheme

The URL scheme of the protocol the request used, such as `https` or `wss`.

property script_root: `str`

Alias for `self.root_path.envron["SCRIPT_ROOT"]` without a trailing slash.

server

The address of the server. (`host`, `port`), (`path`, `None`) for unix sockets, or `None` if not known.

shallow: `bool`

Set when creating the request object. If `True`, reading from the request body will cause a `RuntimeException`. Useful to prevent modifying the stream from middleware.

property stream: `I0[bytes]`

If the incoming form data was not encoded with a known mimetype the data is stored unmodified in

this stream for consumption. Most of the time it is a better idea to use `data` which will give you that data as a string. The stream only returns the data once.

Unlike `input_stream` this stream is properly guarded that you can't accidentally read past the length of the input. Werkzeug will internally always refer to this stream to read data which makes it possible to wrap this object with a stream that does filtering.

Changed in version 0.9: This stream is now always available but might be consumed by the form parser later on. Previously the stream was only set if no parsing happened.

property url: `str`

The full request URL with the scheme, host, root path, path, and query string.

property url_charset: `str`

The charset that is assumed for URLs. Defaults to the value of `charset`.

New in version 0.6.

property url_root: `str`

Alias for `root_url`. The URL with scheme, host, and root path. For example, `https://example.com/app/`.

url_rule: `Optional[Rule] = None`

The internal URL rule that matched the request. This can be useful to inspect which methods are allowed for the URL from a before/after handler (`request.url_rule.methods`) etc. Though if the request's method was invalid for the URL rule, the valid list is available in `routing_exception.valid_methods` instead (an attribute of the Werkzeug exception `MethodNotAllowed`) because the request was never internally bound.

New in version 0.6.

property user_agent: `werkzeug.user_agent.UserAgent`

The user agent. Use `user_agent.string` to get the header value. Set `user_agent_class` to a subclass of `UserAgent` to provide parsing for the other properties or other extended data.

Changed in version 2.0: The built in parser is deprecated and will be removed in Werkzeug 2.1. A `UserAgent` subclass must be set to parse data from the string.

user_agent_class

alias of `werkzeug.useragents._UserAgent`

property values: `werkzeug.datastructures.CombinedMultiDict[str, str]`

A `werkzeug.datastructures.CombinedMultiDict` that combines `args` and `form`.

For GET requests, only `args` are present, not `form`.

Changed in version 2.0: For GET requests, only `args` are present, not `form`.

view_args: `Optional[Dict[str, Any]] = None`

A dict of view arguments that matched the request. If an exception happened when matching, this will be `None`.

property want_form_data_parsed: `bool`

True if the request method carries content. By default this is true if a `Content-Type` is sent.

New in version 0.8.

flask.request

To access incoming request data, you can use the global `request` object. Flask parses incoming request data for you and gives you access to it through that global object. Internally Flask makes sure that you always get the correct data for the active thread if you are in a multithreaded environment.

This is a proxy. See *Notes On Proxies* for more information.

The request object is an instance of a `Request`.

2.1.4 Response Objects

class flask.**Response**(*response=None, status=None, headers=None, mimetype=None, content_type=None, direct_passthrough=False*)

The response object that is used by default in Flask. Works like the response object from Werkzeug but is set to have an HTML mimetype by default. Quite often you don't have to create this object yourself because [make_response\(\)](#) will take care of that for you.

If you want to replace the response object used you can subclass this and set [response_class](#) to your subclass.

Changed in version 1.0: JSON support is added to the response, like the request. This is useful when testing to get the test client response data as JSON.

Changed in version 1.0: Added [max_cookie_size](#).

Parameters

- **response** (*Union[Iterable[str], Iterable[bytes]]*) –
- **status** (*Optional[Union[int, str, http.HTTPStatus]]*) –
- **headers** (*werkzeug.datastructures.Headers*) –
- **mimetype** (*Optional[str]*) –
- **content_type** (*Optional[str]*) –
- **direct_passthrough** (*bool*) –

Return type `None`

accept_ranges

The *Accept-Ranges* header. Even though the name would indicate that multiple values are supported, it must be one string token only.

The values 'bytes' and 'none' are common.

New in version 0.7.

property access_control_allow_credentials: bool

Whether credentials can be shared by the browser to JavaScript code. As part of the preflight request it indicates whether credentials can be used on the cross origin request.

access_control_allow_headers

Which headers can be sent with the cross origin request.

access_control_allow_methods

Which methods can be used for the cross origin request.

access_control_allow_origin

The origin or '*' for any origin that may make cross origin requests.

access_control_expose_headers

Which headers can be shared by the browser to JavaScript code.

access_control_max_age

The maximum age in seconds the access control settings can be cached for.

add_etag(overwrite=False, weak=False)

Add an etag for the current response if there is none yet.

Changed in version 2.0: SHA-1 is used to generate the value. MD5 may not be available in some environments.

Parameters

- **overwrite** (*bool*) –
- **weak** (*bool*) –

Return type `None`

age

The Age response-header field conveys the sender's estimate of the amount of time since the response (or its revalidation) was generated at the origin server.

Age values are non-negative decimal integers, representing time in seconds.

property allow: `werkzeug.datastructures.HeaderSet`

The Allow entity-header field lists the set of methods supported by the resource identified by the Request-URI. The purpose of this field is strictly to inform the recipient of valid methods associated with the resource. An Allow header field **MUST** be present in a 405 (Method Not Allowed) response.

property cache_control: `werkzeug.datastructures.ResponseCacheControl`

The Cache-Control general-header field is used to specify directives that **MUST** be obeyed by all caching mechanisms along the request/response chain.

calculate_content_length()

Returns the content length if available or *None* otherwise.

Return type `Optional[int]`

call_on_close(*func*)

Adds a function to the internal list of functions that should be called as part of closing down the response. Since 0.7 this function also returns the function that was passed so that this can be used as a decorator.

New in version 0.6.

Parameters `func (Callable[[], Any])` –

Return type `Callable[[], Any]`

close()

Close the wrapped response if possible. You can also use the object in a with statement which will automatically close it.

New in version 0.9: Can now be used in a with statement.

Return type `None`

content_encoding

The Content-Encoding entity-header field is used as a modifier to the media-type. When present, its value indicates what additional content codings have been applied to the entity-body, and thus what decoding mechanisms must be applied in order to obtain the media-type referenced by the Content-Type header field.

property content_language: `werkzeug.datastructures.HeaderSet`

The Content-Language entity-header field describes the natural language(s) of the intended audience for the enclosed entity. Note that this might not be equivalent to all the languages used within the entity-body.

content_length

The Content-Length entity-header field indicates the size of the entity-body, in decimal number of OCTETs, sent to the recipient or, in the case of the HEAD method, the size of the entity-body that would have been sent had the request been a GET.

content_location

The Content-Location entity-header field **MAY** be used to supply the resource location for the entity enclosed in the message when that entity is accessible from a location separate from the requested resource's URI.

content_md5

The Content-MD5 entity-header field, as defined in RFC 1864, is an MD5 digest of the entity-body for the purpose of providing an end-to-end message integrity check (MIC) of the entity-body. (Note: a MIC is good for detecting accidental modification of the entity-body in transit, but is not proof against malicious attacks.)

property content_range: `werkzeug.datastructures.ContentRange`

The Content-Range header as a `ContentRange` object. Available even if the header is not set.

New in version 0.7.

property content_security_policy: `werkzeug.datastructures.ContentSecurityPolicy`

The Content-Security-Policy header as a `ContentSecurityPolicy` object. Available even if the header is not set.

The Content-Security-Policy header adds an additional layer of security to help detect and mitigate certain types of attacks.

property content_security_policy_report_only:
`werkzeug.datastructures.ContentSecurityPolicy`

The Content-Security-policy-report-only header as a `ContentSecurityPolicy` object. Available even if the header is not set.

The Content-Security-Policy-Report-Only header adds a csp policy that is not enforced but is reported thereby helping detect certain types of attacks.

content_type

The Content-Type entity-header field indicates the media type of the entity-body sent to the recipient or, in the case of the HEAD method, the media type that would have been sent had the request been a GET.

cross_origin_embedder_policy

Prevents a document from loading any cross-origin resources that do not explicitly grant the document permission. Values must be a member of the `werkzeug.http.COEP` enum.

cross_origin_opener_policy

Allows control over sharing of browsing context group with cross-origin documents. Values must be a member of the `werkzeug.http.COOP` enum.

property data: `Union[bytes, str]`

A descriptor that calls `get_data()` and `set_data()`.

date

The Date general-header field represents the date and time at which the message was originated, having the same semantics as orig-date in RFC 822.

Changed in version 2.0: The datetime object is timezone-aware.

delete_cookie(*key*, *path*='/', *domain*=None, *secure*=False, *httponly*=False, *samesite*=None)

Delete a cookie. Fails silently if key doesn't exist.

Parameters

- **key** (*str*) – the key (name) of the cookie to be deleted.
- **path** (*str*) – if the cookie that should be deleted was limited to a path, the path has to be defined here.
- **domain** (*Optional[str]*) – if the cookie that should be deleted was limited to a domain, that domain has to be defined here.
- **secure** (*bool*) – If True, the cookie will only be available via HTTPS.
- **httponly** (*bool*) – Disallow JavaScript access to the cookie.
- **samesite** (*Optional[str]*) – Limit the scope of the cookie to only be attached to requests that are “same-site”.

Return type `None`**direct_passthrough**

Pass the response body directly through as the WSGI iterable. This can be used when the body is a binary file or other iterator of bytes, to skip some unnecessary checks. Use `send_file()` instead of setting this manually.

expires

The Expires entity-header field gives the date/time after which the response is considered stale. A stale cache entry may not normally be returned by a cache.

Changed in version 2.0: The datetime object is timezone-aware.

classmethod force_type(*response, environ=None*)

Enforce that the WSGI response is a response object of the current type. Werkzeug will use the *Response* internally in many situations like the exceptions. If you call `get_response()` on an exception you will get back a regular *Response* object, even if you are using a custom subclass.

This method can enforce a given response type, and it will also convert arbitrary WSGI callables into response objects if an environ is provided:

```
# convert a Werkzeug response object into an instance of the
# MyResponseClass subclass.
response = MyResponseClass.force_type(response)

# convert any WSGI application into a response object
response = MyResponseClass.force_type(response, environ)
```

This is especially useful if you want to post-process responses in the main dispatcher and use functionality provided by your subclass.

Keep in mind that this will modify response objects in place if possible!

Parameters

- **response** (*Response*) – a response object or wsgi application.
- **environ** (*Optional [WSGIEnvironment]*) – a WSGI environment object.

Returns a response object.

Return type *Response*

freeze(*no_etag=None*)

Make the response object ready to be pickled. Does the following:

- Buffer the response into a list, ignoring `implicit_sequence_conversion` and `direct_passthrough`.
- Set the Content-Length header.
- Generate an ETag header if one is not already set.

Changed in version 2.0: An ETag header is added, the `no_etag` parameter is deprecated and will be removed in Werkzeug 2.1.

Changed in version 0.6: The Content-Length header is set.

Parameters `no_etag` (*None*) –

Return type *None*

classmethod from_app(*app, environ, buffered=False*)

Create a new response object from an application output. This works best if you pass it an application that returns a generator all the time. Sometimes applications may use the `write()` callable returned by the `start_response` function. This tries to resolve such edge cases automatically. But if you don't get the expected output you should set `buffered` to `True` which enforces buffering.

Parameters

- **app** (*WSGIApplication*) – the WSGI application to execute.
- **environ** (*WSGIEnvironment*) – the WSGI environment to execute against.
- **buffered** (*bool*) – set to `True` to enforce buffering.

Returns a response object.

Return type *Response*

get_app_iter(*environ*)

Returns the application iterator for the given environ. Depending on the request method and the current status code the return value might be an empty response rather than the one from the response.

If the request method is *HEAD* or the status code is in a range where the HTTP specification requires an empty response, an empty iterable is returned.

New in version 0.6.

Parameters *environ* (*WSGIEnvironment*) – the WSGI environment of the request.

Returns a response iterable.

Return type `Iterable[bytes]`

get_data(*as_text=False*)

The string representation of the response body. Whenever you call this property the response iterable is encoded and flattened. This can lead to unwanted behavior if you stream big data.

This behavior can be disabled by setting `implicit_sequence_conversion` to *False*.

If *as_text* is set to *True* the return value will be a decoded string.

New in version 0.9.

Parameters *as_text* (*bool*) –

Return type `Union[bytes, str]`

get_etag()

Return a tuple in the form (etag, is_weak). If there is no ETag the return value is (None, None).

Return type `Union[Tuple[str, bool], Tuple[None, None]]`

get_json(*force=False, silent=False*)

Parse *data* as JSON. Useful during testing.

If the mimetype does not indicate JSON (*application/json*, see *is_json*), this returns None.

Unlike *Request.get_json()*, the result is not cached.

Parameters

- **force** (*bool*) – Ignore the mimetype and always try to parse JSON.
- **silent** (*bool*) – Silence parsing errors and return None instead.

Return type `Optional[Any]`

get_wsgi_headers(*environ*)

This is automatically called right before the response is started and returns headers modified for the given environment. It returns a copy of the headers from the response with some modifications applied if necessary.

For example the location header (if present) is joined with the root URL of the environment. Also the content length is automatically set to zero here for certain status codes.

Changed in version 0.6: Previously that function was called *fix_headers* and modified the response object in place. Also since 0.6, IRIs in location and content-location headers are handled properly.

Also starting with 0.6, Werkzeug will attempt to set the content length if it is able to figure it out on its own. This is the case if all the strings in the response iterable are already encoded and the iterable is buffered.

Parameters *environ* (*WSGIEnvironment*) – the WSGI environment of the request.

Returns returns a new `Headers` object.

Return type `werkzeug.datastructures.Headers`

get_wsgi_response(*environ*)

Returns the final WSGI response as tuple. The first item in the tuple is the application iterator, the second the status and the third the list of headers. The response returned is created specially for the given environment. For example if the request method in the WSGI environment is 'HEAD' the response will be empty and only the headers and status code will be present.

New in version 0.6.

Parameters *environ* (*WSGIEnvironment*) – the WSGI environment of the request.

Returns an (*app_iter*, *status*, *headers*) tuple.

Return type Tuple[Iterable[bytes], str, List[Tuple[str, str]]]

property is_json: **bool**

Check if the mimetype indicates JSON data, either *application/json* or *application/*+json*.

property is_sequence: **bool**

If the iterator is buffered, this property will be *True*. A response object will consider an iterator to be buffered if the response attribute is a list or tuple.

New in version 0.6.

property is_streamed: **bool**

If the response is streamed (the response is not an iterable with a length information) this property is *True*. In this case streamed means that there is no information about the number of iterations. This is usually *True* if a generator is passed to the response object.

This is useful for checking before applying some sort of post filtering that should not take place for streamed responses.

iter_encoded()

Iter the response encoded with the encoding of the response. If the response object is invoked as WSGI application the return value of this method is used as application iterator unless *direct_passthrough* was activated.

Return type Iterator[bytes]

property json: **Optional[Any]**

The parsed JSON data if *mimetype* indicates JSON (*application/json*, see *is_json*).

Calls *get_json()* with default arguments.

last_modified

The Last-Modified entity-header field indicates the date and time at which the origin server believes the variant was last modified.

Changed in version 2.0: The datetime object is timezone-aware.

location

The Location response-header field is used to redirect the recipient to a location other than the Request-URI for completion of the request or identification of a new resource.

make_conditional(*request_or_environ*, *accept_ranges=False*, *complete_length=None*)

Make the response conditional to the request. This method works best if an etag was defined for the response already. The *add_etag* method can be used to do that. If called without etag just the date header is set.

This does nothing if the request method in the request or environ is anything but GET or HEAD.

For optimal performance when handling range requests, it's recommended that your response data object implements *seekable*, *seek* and *tell* methods as described by *io.IOBase*. Objects returned by *wrap_file()* automatically implement those methods.

It does not remove the body of the response because that's something the *__call__()* function does for us automatically.

Returns self so that you can do `return resp.make_conditional(req)` but modifies the object in-place.

Parameters

- **request_or_environ** (*WSGIEnvironment*) – a request object or WSGI environment to be used to make the response conditional against.
- **accept_ranges** (*Union[bool, str]*) – This parameter dictates the value of *Accept-Range* header. If `False` (default), the header is not set. If `True`, it will be set to `"bytes"`. If `None`, it will be set to `"none"`. If it's a string, it will use this value.
- **complete_length** (*Optional[int]*) – Will be used only in valid Range Requests. It will set *Content-Range* complete length value and compute *Content-Length* real value. This parameter is mandatory for successful Range Requests completion.

Raises `RequestedRangeNotSatisfiable` if *Range* header could not be parsed or satisfied.

Return type *Response*

Changed in version 2.0: Range processing is skipped if length is 0 instead of raising a 416 Range Not Satisfiable error.

make_sequence()

Converts the response iterator in a list. By default this happens automatically if required. If *implicit_sequence_conversion* is disabled, this method is not automatically called and some properties might raise exceptions. This also encodes all the items.

New in version 0.6.

Return type `None`

property max_cookie_size: int

Read-only view of the `MAX_COOKIE_SIZE` config key.

See `max_cookie_size` in Werkzeug's docs.

property mimetype: Optional[str]

The mimetype (content type without charset etc.)

property mimetype_params: Dict[str, str]

The mimetype parameters as dict. For example if the content type is `text/html; charset=utf-8` the params would be `{'charset': 'utf-8'}`.

New in version 0.5.

property retry_after: Optional[datetime.datetime]

The `Retry-After` response-header field can be used with a 503 (Service Unavailable) response to indicate how long the service is expected to be unavailable to the requesting client.

Time in seconds until expiration or date.

Changed in version 2.0: The `datetime` object is timezone-aware.

set_cookie(key, value="", max_age=None, expires=None, path='/', domain=None, secure=False, httponly=False, samesite=None)

Sets a cookie.

A warning is raised if the size of the cookie header exceeds `max_cookie_size`, but the header will still be set.

Parameters

- **key** (*str*) – the key (name) of the cookie to be set.
- **value** (*str*) – the value of the cookie.
- **max_age** (*Optional[Union[datetime.timedelta, int]]*) – should be a number of seconds, or `None` (default) if the cookie should last only as long as the client's browser session.
- **expires** (*Optional[Union[str, datetime.datetime, int, float]]*) – should be a *datetime* object or UNIX timestamp.

- **path** (*Optional[str]*) – limits the cookie to a given path, per default it will span the whole domain.
- **domain** (*Optional[str]*) – if you want to set a cross-domain cookie. For example, `domain=".example.com"` will set a cookie that is readable by the domain `www.example.com`, `foo.example.com` etc. Otherwise, a cookie will only be readable by the domain that set it.
- **secure** (*bool*) – If True, the cookie will only be available via HTTPS.
- **httponly** (*bool*) – Disallow JavaScript access to the cookie.
- **samesite** (*Optional[str]*) – Limit the scope of the cookie to only be attached to requests that are “same-site”.

Return type `None`

set_data(*value*)

Sets a new string as response. The value must be a string or bytes. If a string is set it's encoded to the charset of the response (utf-8 by default).

New in version 0.9.

Parameters *value* (*Union[bytes, str]*) –

Return type `None`

set_etag(*etag*, *weak=False*)

Set the etag, and override the old one if there was one.

Parameters

- **etag** (*str*) –
- **weak** (*bool*) –

Return type `None`

property status: `str`

The HTTP status code as a string.

property status_code: `int`

The HTTP status code as a number.

property stream: `werkzeug.wrappers.response.ResponseStream`

The response iterable as write-only stream.

property vary: `werkzeug.datastructures.HeaderSet`

The Vary field value indicates the set of request-header fields that fully determines, while the response is fresh, whether a cache is permitted to use the response to reply to a subsequent request without revalidation.

property www_authenticate: `werkzeug.datastructures.WWWAuthenticate`

The WWW-Authenticate header in a parsed form.

2.1.5 Sessions

If you have set `Flask.secret_key` (or configured it from `SECRET_KEY`) you can use sessions in Flask applications. A session makes it possible to remember information from one request to another. The way Flask does this is by using a signed cookie. The user can look at the session contents, but can't modify it unless they know the secret key, so make sure to set that to something complex and unguessable.

To access the current session you can use the `session` object:

class flask.session

The session object works pretty much like an ordinary dict, with the difference that it keeps track of modifications.

This is a proxy. See [Notes On Proxies](#) for more information.

The following attributes are interesting:

new

True if the session is new, False otherwise.

modified

True if the session object detected a modification. Be advised that modifications on mutable structures are not picked up automatically, in that situation you have to explicitly set the attribute to True yourself. Here an example:

```
# this change is not picked up because a mutable object (here
# a list) is changed.
session['objects'].append(42)
# so mark it as modified yourself
session.modified = True
```

permanent

If set to True the session lives for `permanent_session_lifetime` seconds. The default is 31 days. If set to False (which is the default) the session will be deleted when the user closes the browser.

2.1.6 Session Interface

New in version 0.8.

The session interface provides a simple way to replace the session implementation that Flask is using.

class flask.sessions.SessionInterface

The basic interface you have to implement in order to replace the default session interface which uses Werkzeug's securecookie implementation. The only methods you have to implement are `open_session()` and `save_session()`, the others have useful defaults which you don't need to change.

The session object returned by the `open_session()` method has to provide a dictionary like interface plus the properties and methods from the `SessionMixin`. We recommend just subclassing a dict and adding that mixin:

```
class Session(dict, SessionMixin):
    pass
```

If `open_session()` returns None Flask will call into `make_null_session()` to create a session that acts as replacement if the session support cannot work because some requirement is not fulfilled. The default `NullSession` class that is created will complain that the secret key was not set.

To replace the session interface on an application all you have to do is to assign `flask.Flask.session_interface`:

```
app = Flask(__name__)
app.session_interface = MySessionInterface()
```

New in version 0.8.

get_cookie_domain(app)

Returns the domain that should be set for the session cookie.

Uses `SESSION_COOKIE_DOMAIN` if it is configured, otherwise falls back to detecting the domain based on `SERVER_NAME`.

Once detected (or if not set at all), `SESSION_COOKIE_DOMAIN` is updated to avoid re-running the logic.

Parameters `app` (`Flask`) –

Return type Optional[`str`]

get_cookie_httponly(*app*)

Returns True if the session cookie should be httponly. This currently just returns the value of the `SESSION_COOKIE_HTTPONLY` config var.

Parameters *app* (Flask) –

Return type bool

get_cookie_name(*app*)

Returns the name of the session cookie.

Uses `app.session_cookie_name` which is set to `SESSION_COOKIE_NAME`

Parameters *app* (Flask) –

Return type str

get_cookie_path(*app*)

Returns the path for which the cookie should be valid. The default implementation uses the value from the `SESSION_COOKIE_PATH` config var if it's set, and falls back to `APPLICATION_ROOT` or uses `/` if it's None.

Parameters *app* (Flask) –

Return type str

get_cookie_samesite(*app*)

Return 'Strict' or 'Lax' if the cookie should use the SameSite attribute. This currently just returns the value of the `SESSION_COOKIE_SAMESITE` setting.

Parameters *app* (Flask) –

Return type str

get_cookie_secure(*app*)

Returns True if the cookie should be secure. This currently just returns the value of the `SESSION_COOKIE_SECURE` setting.

Parameters *app* (Flask) –

Return type bool

get_expiration_time(*app*, *session*)

A helper method that returns an expiration date for the session or None if the session is linked to the browser session. The default implementation returns now + the permanent session lifetime configured on the application.

Parameters

- *app* (Flask) –
- *session* (`flask.sessions.SessionMixin`) –

Return type Optional[datetime.datetime]

is_null_session(*obj*)

Checks if a given object is a null session. Null sessions are not asked to be saved.

This checks if the object is an instance of `null_session_class` by default.

Parameters *obj* (*object*) –

Return type bool

make_null_session(*app*)

Creates a null session which acts as a replacement object if the real session support could not be loaded due to a configuration error. This mainly aids the user experience because the job of the null session is to still support lookup without complaining but modifications are answered with a helpful error message of what failed.

This creates an instance of `null_session_class` by default.

Parameters `app` (`Flask`) –

Return type `flask.sessions.NullSession`

null_session_class

`make_null_session()` will look here for the class that should be created when a null session is requested. Likewise the `is_null_session()` method will perform a typecheck against this type.

alias of `flask.sessions.NullSession`

open_session(`app`, `request`)

This method has to be implemented and must either return `None` in case the loading failed because of a configuration error or an instance of a session object which implements a dictionary like interface + the methods and attributes on `SessionMixin`.

Parameters

- `app` (`Flask`) –
- `request` (`Request`) –

Return type `Optional[flask.sessions.SessionMixin]`

pickle_based = False

A flag that indicates if the session interface is pickle based. This can be used by Flask extensions to make a decision in regards to how to deal with the session object.

New in version 0.10.

save_session(`app`, `session`, `response`)

This is called for actual sessions returned by `open_session()` at the end of the request. This is still called during a request context so if you absolutely need access to the request you can do that.

Parameters

- `app` (`Flask`) –
- `session` (`flask.sessions.SessionMixin`) –
- `response` (`Response`) –

Return type `None`

should_set_cookie(`app`, `session`)

Used by session backends to determine if a Set-Cookie header should be set for this session cookie for this response. If the session has been modified, the cookie is set. If the session is permanent and the `SESSION_REFRESH_EACH_REQUEST` config is true, the cookie is always set.

This check is usually skipped if the session was deleted.

New in version 0.11.

Parameters

- `app` (`Flask`) –
- `session` (`flask.sessions.SessionMixin`) –

Return type `bool`

class flask.sessions.SecureCookieSessionInterface

The default session interface that stores sessions in signed cookies through the `itsdangerous` module.

static digest_method(`string=b"`, *, `usedforsecurity=True`)

the hash function to use for the signature. The default is `sha1`

key_derivation = 'hmac'

the name of the `itsdangerous` supported key derivation. The default is `hmac`.

open_session(*app, request*)

This method has to be implemented and must either return `None` in case the loading failed because of a configuration error or an instance of a session object which implements a dictionary like interface + the methods and attributes on [SessionMixin](#).

Parameters

- **app** ([Flask](#)) –
- **request** ([Request](#)) –

Return type `Optional[flask.sessions.SecureCookieSession]`

salt = 'cookie-session'

the salt that should be applied on top of the secret key for the signing of cookie based sessions.

save_session(*app, session, response*)

This is called for actual sessions returned by [open_session\(\)](#) at the end of the request. This is still called during a request context so if you absolutely need access to the request you can do that.

Parameters

- **app** ([Flask](#)) –
- **session** ([flask.sessions.SessionMixin](#)) –
- **response** ([Response](#)) –

Return type `None`

serializer = <flask.json.tag.TaggedJSONSerializer object>

A python serializer for the payload. The default is a compact JSON derived serializer with support for some extra Python types such as datetime objects or tuples.

session_class

alias of [flask.sessions.SecureCookieSession](#)

class flask.sessions.SecureCookieSession(*initial=None*)

Base class for sessions based on signed cookies.

This session backend will set the [modified](#) and [accessed](#) attributes. It cannot reliably track whether a session is new (vs. empty), so `new` remains hard coded to `False`.

Parameters **initial** (*Any*) –

Return type `None`

accessed = False

header, which allows caching proxies to cache different pages for different users.

get(*key, default=None*)

Return the value for key if key is in the dictionary, else default.

Parameters

- **key** (*str*) –
- **default** (*Optional[Any]*) –

Return type `Any`

modified = False

When data is changed, this is set to `True`. Only the session dictionary itself is tracked; if the session contains mutable data (for example a nested dict) then this must be set to `True` manually when modifying that data. The session cookie will only be written to the response if this is `True`.

setdefault(*key, default=None*)

Insert key with a value of default if key is not in the dictionary.

Return the value for key if key is in the dictionary, else default.

Parameters

- **key** (*str*) –
- **default** (*Optional[Any]*) –

Return type *Any*

class flask.sessions.**NullSession**(*initial=None*)

Class used to generate nicer error messages if sessions are not available. Will still allow read-only access to the empty session but fail on setting.

Parameters **initial** (*Any*) –

Return type *None*

clear() → *None*. Remove all items from D.

Parameters

- **args** (*Any*) –
- **kwargs** (*Any*) –

Return type *te.NoReturn*

pop(*k*[, *d*]) → *v*, remove specified key and return the corresponding value.

If key is not found, default is returned if given, otherwise *KeyError* is raised

Parameters

- **args** (*Any*) –
- **kwargs** (*Any*) –

Return type *te.NoReturn*

popitem(**args*, ***kwargs*)

Remove and return a (key, value) pair as a 2-tuple.

Pairs are returned in LIFO (last-in, first-out) order. Raises *KeyError* if the dict is empty.

Parameters

- **args** (*Any*) –
- **kwargs** (*Any*) –

Return type *te.NoReturn*

setdefault(**args*, ***kwargs*)

Insert key with a value of default if key is not in the dictionary.

Return the value for key if key is in the dictionary, else default.

Parameters

- **args** (*Any*) –
- **kwargs** (*Any*) –

Return type *te.NoReturn*

update([*E*], ***F*) → *None*. Update D from dict/iterable E and F.

If E is present and has a *.keys()* method, then does: for k in E: D[k] = E[k] If E is present and lacks a *.keys()* method, then does: for k, v in E: D[k] = v In either case, this is followed by: for k in F: D[k] = F[k]

Parameters

- **args** (*Any*) –
- **kwargs** (*Any*) –

Return type *te.NoReturn*

class flask.sessions.SessionMixin

Expands a basic dictionary with session attributes.

accessed = True

Some implementations can detect when session data is read or written and set this when that happens. The mixin default is hard coded to True.

modified = True

Some implementations can detect changes to the session and set this when that happens. The mixin default is hard coded to True.

property permanent: bool

This reflects the `'_permanent'` key in the dict.

Notice

The `PERMANENT_SESSION_LIFETIME` config key can also be an integer starting with Flask 0.8. Either catch this down yourself or use the `permanent_session_lifetime` attribute on the app which converts the result to an integer automatically.

2.1.7 Test Client

class flask.testing.FlaskClient(*args, **kwargs)

Works like a regular Werkzeug test client but has some knowledge about how Flask works to defer the cleanup of the request context stack to the end of a `with` body when used in a `with` statement. For general information about how to use this class refer to `werkzeug.test.Client`.

Changed in version 0.12: `app.test_client()` includes preset default environment, which can be set after instantiation of the `app.test_client()` object in `client.environ_base`.

Basic usage is outlined in the *Testing Flask Applications* chapter.

Parameters

- **args** (*Any*) –
- **kwargs** (*Any*) –

Return type *None*

open(*args, as_tuple=False, buffered=False, follow_redirects=False, **kwargs)

Generate an environ dict from the given arguments, make a request to the application using it, and return the response.

Parameters

- **args** (*Any*) – Passed to `EnvironBuilder` to create the environ for the request. If a single arg is passed, it can be an existing `EnvironBuilder` or an environ dict.
- **buffered** (*bool*) – Convert the iterator returned by the app into a list. If the iterator has a `close()` method, it is called automatically.
- **follow_redirects** (*bool*) – Make additional requests to follow HTTP redirects until a non-redirect status is returned. `TestResponse.history` lists the intermediate responses.
- **as_tuple** (*bool*) –
- **kwargs** (*Any*) –

Return type *Response*

Changed in version 2.0: `as_tuple` is deprecated and will be removed in Werkzeug 2.1. Use `TestResponse.request` and `request.environ` instead.

Changed in version 2.0: The request input stream is closed when calling `response.close()`. Input streams for redirects are automatically closed.

Changed in version 0.5: If a dict is provided as file in the dict for the data parameter the content type has to be called `content_type` instead of `mimetype`. This change was made for consistency with `werkzeug.FileWrapper`.

Changed in version 0.5: Added the `follow_redirects` parameter.

session_transaction(*args, **kwargs)

When used in combination with a `with` statement this opens a session transaction. This can be used to modify the session that the test client uses. Once the `with` block is left the session is stored back.

```
with client.session_transaction() as session:
    session['value'] = 42
```

Internally this is implemented by going through a temporary test request context and since session handling could depend on request variables this function accepts the same arguments as `test_request_context()` which are directly passed through.

Parameters

- **args** (Any) –
- **kwargs** (Any) –

Return type Generator[*flask.sessions.SessionMixin*, None, None]

2.1.8 Test CLI Runner

class flask.testing.FlaskCliRunner(app, **kwargs)

A `CliRunner` for testing a Flask app's CLI commands. Typically created using `test_cli_runner()`. See *Testing CLI Commands*.

Parameters

- **app** (Flask) –
- **kwargs** (Any) –

Return type None

invoke(cli=None, args=None, **kwargs)

Invokes a CLI command in an isolated environment. See `CliRunner.invoke` for full method documentation. See *Testing CLI Commands* for examples.

If the `obj` argument is not given, passes an instance of `ScriptInfo` that knows how to load the Flask app being tested.

Parameters

- **cli** (Optional[Any]) – Command object to invoke. Default is the app's `cli` group.
- **args** (Optional[Any]) – List of strings to invoke the command with.
- **kwargs** (Any) –

Returns a `Result` object.

Return type Any

2.1.9 Application Globals

To share data that is valid for one request only from one function to another, a global variable is not good enough because it would break in threaded environments. Flask provides you with a special object that ensures it is only valid for the active request and that will return different values for each request. In a nutshell: it does the right thing, like it does for *request* and *session*.

`flask.g`

A namespace object that can store data during an *application context*. This is an instance of `Flask.app_ctx_globals_class`, which defaults to `ctx._AppCtxGlobals`.

This is a good place to store resources during a request. During testing, you can use the *Faking Resources and Context* pattern to pre-configure such resources.

This is a proxy. See *Notes On Proxies* for more information.

Changed in version 0.10: Bound to the application context instead of the request context.

class `flask.ctx._AppCtxGlobals`

A plain object. Used as a namespace for storing data during an application context.

Creating an app context automatically creates this object, which is made available as the `g` proxy.

'key' in g

Check whether an attribute is present.

New in version 0.10.

iter(g)

Return an iterator over the attribute names.

New in version 0.10.

get(name, default=None)

Get an attribute by name, or a default value. Like `dict.get()`.

Parameters

- **name** (*str*) – Name of attribute to get.
- **default** (*Optional[Any]*) – Value to return if the attribute is not present.

Return type Any

New in version 0.10.

pop(name, default=<object object>)

Get and remove an attribute by name. Like `dict.pop()`.

Parameters

- **name** (*str*) – Name of attribute to pop.
- **default** (*Any*) – Value to return if the attribute is not present, instead of raising a `KeyError`.

Return type Any

New in version 0.11.

setdefault(name, default=None)

Get the value of an attribute if it is present, otherwise set and return a default value. Like `dict.setdefault()`.

Parameters

- **name** (*str*) – Name of attribute to get.
- **default** (*Optional[Any]*) – Value to set and return if the attribute is not present.

Return type Any

New in version 0.11.

2.1.10 Useful Functions and Classes

flask.current_app

A proxy to the application handling the current request. This is useful to access the application without needing to import it, or if it can't be imported, such as when using the application factory pattern or in blueprints and extensions.

This is only available when an *application context* is pushed. This happens automatically during requests and CLI commands. It can be controlled manually with `app_context()`.

This is a proxy. See *Notes On Proxies* for more information.

flask.has_request_context()

If you have code that wants to test if a request context is there or not this function can be used. For instance, you may want to take advantage of request information if the request object is available, but fail silently if it is unavailable.

```
class User(db.Model):

    def __init__(self, username, remote_addr=None):
        self.username = username
        if remote_addr is None and has_request_context():
            remote_addr = request.remote_addr
        self.remote_addr = remote_addr
```

Alternatively you can also just test any of the context bound objects (such as `request` or `g`) for truthness:

```
class User(db.Model):

    def __init__(self, username, remote_addr=None):
        self.username = username
        if remote_addr is None and request:
            remote_addr = request.remote_addr
        self.remote_addr = remote_addr
```

New in version 0.7.

Return type bool

flask.copy_current_request_context(f)

A helper function that decorates a function to retain the current request context. This is useful when working with greenlets. The moment the function is decorated a copy of the request context is created and then pushed when the function is called. The current session is also included in the copied request context.

Example:

```
import gevent
from flask import copy_current_request_context

@app.route('/')
def index():
    @copy_current_request_context
    def do_some_work():
        # do some work here, it can access flask.request or
        # flask.session like you would otherwise in the view function.
        ...
    gevent.spawn(do_some_work)
    return 'Regular response'
```

New in version 0.10.

Parameters `f` (*Callable*) –

Return type `Callable`

`flask.has_app_context()`

Works like `has_request_context()` but for the application context. You can also just do a boolean check on the `current_app` object instead.

New in version 0.9.

Return type `bool`

`flask.url_for(endpoint, **values)`

Generates a URL to the given endpoint with the method provided.

Variable arguments that are unknown to the target endpoint are appended to the generated URL as query arguments. If the value of a query argument is `None`, the whole pair is skipped. In case blueprints are active you can shortcut references to the same blueprint by prefixing the local endpoint with a dot (`.`).

This will reference the index function local to the current blueprint:

```
url_for('.index')
```

See *URL Building*.

Configuration values `APPLICATION_ROOT` and `SERVER_NAME` are only used when generating URLs outside of a request context.

To integrate applications, *Flask* has a hook to intercept URL build errors through `Flask.url_build_error_handlers`. The `url_for` function results in a `BuildError` when the current app does not have a URL for the given endpoint and values. When it does, the `current_app` calls its `url_build_error_handlers` if it is not `None`, which can return a string to use as the result of `url_for` (instead of `url_for`'s default to raise the `BuildError` exception) or re-raise the exception. An example:

```
def external_url_handler(error, endpoint, values):
    "Looks up an external URL when `url_for` cannot build a URL."
    # This is an example of hooking the build_error_handler.
    # Here, lookup_url is some utility function you've built
    # which looks up the endpoint in some external URL registry.
    url = lookup_url(endpoint, **values)
    if url is None:
        # External lookup did not have a URL.
        # Re-raise the BuildError, in context of original traceback.
        exc_type, exc_value, tb = sys.exc_info()
        if exc_value is error:
            raise exc_type(exc_value).with_traceback(tb)
        else:
            raise error
    # url_for will use this result, instead of raising BuildError.
    return url
```

```
app.url_build_error_handlers.append(external_url_handler)
```

Here, `error` is the instance of `BuildError`, and `endpoint` and `values` are the arguments passed into `url_for`. Note that this is for building URLs outside the current application, and not for handling 404 Not Found errors.

New in version 0.10: The `_scheme` parameter was added.

New in version 0.9: The `_anchor` and `_method` parameters were added.

New in version 0.9: Calls `Flask.handle_build_error()` on `BuildError`.

Parameters

- **endpoint** (*str*) – the endpoint of the URL (name of the function)
- **values** (*Any*) – the variable arguments of the URL rule
- **_external** – if set to `True`, an absolute URL is generated. Server address can be changed via `SERVER_NAME` configuration variable which falls back to the `Host` header, then to the IP and port of the request.
- **_scheme** – a string specifying the desired URL scheme. The `_external` parameter must be set to `True` or a `ValueError` is raised. The default behavior uses the same scheme as the current request, or `PREFERRED_URL_SCHEME` if no request context is available. This also can be set to an empty string to build protocol-relative URLs.
- **_anchor** – if provided this is added as anchor to the URL.
- **_method** – if provided this explicitly specifies an HTTP method.

Return type `str`

`flask.abort(status, *args, **kwargs)`

Raises an `HTTPException` for the given status code or WSGI application.

If a status code is given, it will be looked up in the list of exceptions and will raise that exception. If passed a WSGI application, it will wrap it in a proxy WSGI exception and raise that:

```
abort(404) # 404 Not Found
abort(Response('Hello World'))
```

Parameters

- **status** (`Union[int, Response]`) –
- **args** (*Any*) –
- **kwargs** (*Any*) –

Return type `te.NoReturn`

`flask.redirect(location, code=302, Response=None)`

Returns a response object (a WSGI application) that, if called, redirects the client to the target location. Supported codes are 301, 302, 303, 305, 307, and 308. 300 is not supported because it's not a real redirect and 304 because it's the answer for a request with a request with defined If-Modified-Since headers.

New in version 0.10: The class used for the Response object can now be passed in.

New in version 0.6: The location can now be a unicode string that is encoded using the `iri_to_uri()` function.

Parameters

- **location** (*str*) – the location the response should redirect to.
- **code** (*int*) – the redirect status code. defaults to 302.
- **Response** (*class*) – a Response class to use when instantiating a response. The default is `werkzeug.wrappers.Response` if unspecified.

Return type `Response`

`flask.make_response(*args)`

Sometimes it is necessary to set additional headers in a view. Because views do not have to return response objects but can return a value that is converted into a response object by Flask itself, it becomes tricky to add headers to it. This function can be called instead of using a return and you will get a response object which you can use to attach headers.

If view looked like this and you want to add a new header:

```
def index():
    return render_template('index.html', foo=42)
```

You can now do something like this:

```
def index():
    response = make_response(render_template('index.html', foo=42))
    response.headers['X-Parachutes'] = 'parachutes are cool'
    return response
```

This function accepts the very same arguments you can return from a view function. This for example creates a response with a 404 error code:

```
response = make_response(render_template('not_found.html'), 404)
```

The other use case of this function is to force the return value of a view function into a response which is helpful with view decorators:

```
response = make_response(view_function())
response.headers['X-Parachutes'] = 'parachutes are cool'
```

Internally this function does the following things:

- if no arguments are passed, it creates a new response argument
- if one argument is passed, `flask.Flask.make_response()` is invoked with it.
- if more than one argument is passed, the arguments are passed to the `flask.Flask.make_response()` function as tuple.

New in version 0.6.

Parameters `args` (*Any*) –

Return type *Response*

`flask.after_this_request` (*f*)

Executes a function after this request. This is useful to modify response objects. The function is passed the response object and has to return the same or a new one.

Example:

```
@app.route('/')
def index():
    @after_this_request
    def add_header(response):
        response.headers['X-Foo'] = 'Parachute'
        return response
    return 'Hello World!'
```

This is more useful if a function other than the view function wants to modify a response. For instance think of a decorator that wants to add some headers without converting the return value into a response object.

New in version 0.9.

Parameters `f` (*Callable[[Response], Response]*) –

Return type *Callable[[Response], Response]*

`flask.send_file` (*path_or_file*, *mimetype=None*, *as_attachment=False*, *download_name=None*, *attachment_filename=None*, *conditional=True*, *etag=True*, *add_etags=None*, *last_modified=None*, *max_age=None*, *cache_timeout=None*)

Send the contents of a file to the client.

The first argument can be a file path or a file-like object. Paths are preferred in most cases because Werkzeug can manage the file and get extra information from the path. Passing a file-like object requires that the file is opened in binary mode, and is mostly useful when building a file in memory with `io.BytesIO`.

Never pass file paths provided by a user. The path is assumed to be trusted, so a user could craft a path to access a file you didn't intend. Use `send_from_directory()` to safely serve user-requested paths from within a directory.

If the WSGI server sets a `file_wrapper` in `environ`, it is used, otherwise Werkzeug's built-in wrapper is used. Alternatively, if the HTTP server supports X-Sendfile, configuring Flask with `USE_X_SENDFILE = True` will tell the server to send the given path, which is much more efficient than reading it in Python.

Parameters

- **path_or_file** (`Union[os.PathLike, str, BinaryIO]`) – The path to the file to send, relative to the current working directory if a relative path is given. Alternatively, a file-like object opened in binary mode. Make sure the file pointer is seeked to the start of the data.
- **mimetype** (`Optional[str]`) – The MIME type to send for the file. If not provided, it will try to detect it from the file name.
- **as_attachment** (`bool`) – Indicate to a browser that it should offer to save the file instead of displaying it.
- **download_name** (`Optional[str]`) – The default name browsers will use when saving the file. Defaults to the passed file name.
- **conditional** (`bool`) – Enable conditional and range responses based on request headers. Requires passing a file path and `environ`.
- **etag** (`Union[bool, str]`) – Calculate an ETag for the file, which requires passing a file path. Can also be a string to use instead.
- **last_modified** (`Optional[Union[datetime.datetime, int, float]]`) – The last modified time to send for the file, in seconds. If not provided, it will try to detect it from the file path.
- **max_age** (`Optional[Union[int, Callable[[Optional[str]], Optional[int]]]`) – How long the client should cache the file, in seconds. If set, `Cache-Control` will be `public`, otherwise it will be `no-cache` to prefer conditional caching.
- **attachment_filename** (`Optional[str]`) –
- **add_etags** (`Optional[bool]`) –
- **cache_timeout** (`Optional[int]`) –

Changed in version 2.0: `download_name` replaces the `attachment_filename` parameter. If `as_attachment=False`, it is passed with `Content-Disposition: inline` instead.

Changed in version 2.0: `max_age` replaces the `cache_timeout` parameter. `conditional` is enabled and `max_age` is not set by default.

Changed in version 2.0: `etag` replaces the `add_etags` parameter. It can be a string to use instead of generating one.

Changed in version 2.0: Passing a file-like object that inherits from `TextIOBase` will raise a `ValueError` rather than sending an empty file.

New in version 2.0: Moved the implementation to Werkzeug. This is now a wrapper to pass some Flask-specific arguments.

Changed in version 1.1: `filename` may be a `PathLike` object.

Changed in version 1.1: Passing a `BytesIO` object supports range requests.

Changed in version 1.0.3: Filenames are encoded with ASCII instead of Latin-1 for broader compatibility with WSGI servers.

Changed in version 1.0: UTF-8 filenames as specified in [RFC 2231](#) are supported.

Changed in version 0.12: The filename is no longer automatically inferred from file objects. If you want to use automatic MIME and etag support, pass a filename via `filename_or_fp` or `attachment_filename`.

Changed in version 0.12: `attachment_filename` is preferred over `filename` for MIME detection.

Changed in version 0.9: `cache_timeout` defaults to `Flask.get_send_file_max_age()`.

Changed in version 0.7: MIME guessing and etag support for file-like objects was deprecated because it was unreliable. Pass a filename if you are able to, otherwise attach an etag yourself.

Changed in version 0.5: The `add_etags`, `cache_timeout` and `conditional` parameters were added. The default behavior is to add etags.

New in version 0.2.

`flask.send_from_directory(directory, path, filename=None, **kwargs)`
 Send a file from within a directory using `send_file()`.

```
@app.route("/uploads/<path:name>")
def download_file(name):
    return send_from_directory(
        app.config['UPLOAD_FOLDER'], name, as_attachment=True
    )
```

This is a secure way to serve files from a folder, such as static files or uploads. Uses `safe_join()` to ensure the path coming from the client is not maliciously crafted to point outside the specified directory.

If the final path does not point to an existing regular file, raises a 404 `NotFound` error.

Parameters

- **directory** (*Union[os.PathLike, str]*) – The directory that path must be located under.
- **path** (*Union[os.PathLike, str]*) – The path to the file to send, relative to directory.
- **kwargs** (*Any*) – Arguments to pass to `send_file()`.
- **filename** (*Optional[str]*) –

Return type *Response*

Changed in version 2.0: `path` replaces the `filename` parameter.

New in version 2.0: Moved the implementation to Werkzeug. This is now a wrapper to pass some Flask-specific arguments.

New in version 0.5.

`flask.safe_join(directory, *pathnames)`
 Safely join zero or more untrusted path components to a base directory to avoid escaping the base directory.

Parameters

- **directory** (*str*) – The trusted base directory.
- **pathnames** (*str*) – The untrusted path components relative to the base directory.

Returns A safe path, otherwise `None`.

Return type *str*

`flask.escape()`
 Replace the characters `&`, `<`, `>`, `'`, and `"` in the string with HTML-safe sequences. Use this if you need to display text that might contain such characters in HTML.

If the object has an `__html__` method, it is called and the return value is assumed to already be safe for HTML.

Parameters `s` – An object to be converted to a string and escaped.

Returns A *Markup* string with the escaped text.

class `flask.Markup`(*base=""*, *encoding=None*, *errors='strict'*)

A string that is ready to be safely inserted into an HTML or XML document, either because it was escaped or because it was marked safe.

Passing an object to the constructor converts it to text and wraps it to mark it safe without escaping. To escape the text, use the `escape()` class method instead.

```
>>> Markup("Hello, <em>World</em>!")
Markup('Hello, <em>World</em>!')
>>> Markup(42)
Markup('42')
>>> Markup.escape("Hello, <em>World</em>!")
Markup('Hello &lt;em&gt;World&lt;/em&gt;!')
```

This implements the `__html__()` interface that some frameworks use. Passing an object that implements `__html__()` will wrap the output of that method, marking it safe.

```
>>> class Foo:
...     def __html__(self):
...         return '<a href="/foo">foo</a>'
...
>>> Markup(Foo())
Markup('<a href="/foo">foo</a>')
```

This is a subclass of `str`. It has the same methods, but escapes their arguments and returns a *Markup* instance.

```
>>> Markup("<em>%s</em>") % ("foo & bar",)
Markup('<em>foo &amp; bar</em>')
>>> Markup("<em>Hello</em> ") + "<foo>"
Markup('<em>Hello</em> &lt;foo&gt;')
```

Parameters

- **base** (*Any*) –
- **encoding** (*Optional[str]*) –
- **errors** (*str*) –

Return type *Markup*

classmethod `escape(s)`

Escape a string. Calls `escape()` and ensures that for subclasses the correct type is returned.

Parameters `s` (*Any*) –

Return type *markupsafe.Markup*

striptags()

`unescape()` the markup, remove tags, and normalize whitespace to single spaces.

```
>>> Markup("Main &raquo; <em>About</em>").striptags()
'Main » About'
```

Return type `str`

unescape()

Convert escaped markup back into a text string. This replaces HTML entities with the characters they represent.

```
>>> Markup("Main &raquo; <em>About</em>").unescape()
'Main » <em>About</em>'
```

Return type `str`

2.1.11 Message Flashing

`flask.flash(message, category='message')`

Flashes a message to the next request. In order to remove the flashed message from the session and to display it to the user, the template has to call `get_flashed_messages()`.

Changed in version 0.3: `category` parameter added.

Parameters

- **message** (`str`) – the message to be flashed.
- **category** (`str`) – the category for the message. The following values are recommended: 'message' for any kind of message, 'error' for errors, 'info' for information messages and 'warning' for warnings. However any kind of string can be used as category.

Return type `None`

`flask.get_flashed_messages(with_categories=False, category_filter=())`

Pulls all flashed messages from the session and returns them. Further calls in the same request to the function will return the same messages. By default just the messages are returned, but when `with_categories` is set to True, the return value will be a list of tuples in the form (category, message) instead.

Filter the flashed messages to one or more categories by providing those categories in `category_filter`. This allows rendering categories in separate html blocks. The `with_categories` and `category_filter` arguments are distinct:

- `with_categories` controls whether categories are returned with message text (True gives a tuple, where False gives just the message text).
- `category_filter` filters the messages down to only those matching the provided categories.

See [Message Flashing](#) for examples.

Changed in version 0.9: `category_filter` parameter added.

Changed in version 0.3: `with_categories` parameter added.

Parameters

- **with_categories** (`bool`) – set to True to also receive categories.
- **category_filter** (`Iterable[str]`) – filter of categories to limit return values. Only categories in the list will be returned.

Return type `Union[List[str], List[Tuple[str, str]]]`

2.1.12 JSON Support

Flask uses the built-in `json` module for handling JSON. It will use the current blueprint's or application's JSON encoder and decoder for easier customization. By default it handles some extra data types:

- `datetime.datetime` and `datetime.date` are serialized to **RFC 822** strings. This is the same as the HTTP date format.
- `uuid.UUID` is serialized to a string.
- `dataclasses.dataclass` is passed to `dataclasses.asdict()`.
- *Markup* (or any object with a `__html__` method) will call the `__html__` method to get a string.

Jinja's `|tojson` filter is configured to use Flask's `dumps()` function. The filter marks the output with `|safe` automatically. Use the filter to render data inside `<script>` tags.

```
<script>
  const names = {{ names|tojson }};
  renderChart(names, {{ axis_data|tojson }});
</script>
```

`flask.json jsonify(*args, **kwargs)`

Serialize data to JSON and wrap it in a *Response* with the `application/json` mimetype.

Uses `dumps()` to serialize the data, but `args` and `kwargs` are treated as data rather than arguments to `json.dumps()`.

1. Single argument: Treated as a single value.
2. Multiple arguments: Treated as a list of values. `jsonify(1, 2, 3)` is the same as `jsonify([1, 2, 3])`.
3. Keyword arguments: Treated as a dict of values. `jsonify(data=data, errors=errors)` is the same as `jsonify({"data": data, "errors": errors})`.
4. Passing both arguments and keyword arguments is not allowed as it's not clear what should happen.

```
from flask import jsonify

@app.route("/users/me")
def get_current_user():
    return jsonify(
        username=g.user.username,
        email=g.user.email,
        id=g.user.id,
    )
```

Will return a JSON response like this:

```
{
  "username": "admin",
  "email": "admin@localhost",
  "id": 42
}
```

The default output omits indents and spaces after separators. In debug mode or if `JSONIFY_PRETTYPRINT_REGULAR` is `True`, the output will be formatted to be easier to read.

Changed in version 2.0.2: `decimal.Decimal` is supported by converting to a string.

Changed in version 0.11: Added support for serializing top-level arrays. This introduces a security risk in ancient browsers. See *JSON Security*.

New in version 0.2.

Parameters

- **args** (*Any*) –
- **kwargs** (*Any*) –

Return type *Response*

`flask.json.dumps(obj, app=None, **kwargs)`

Serialize an object to a string of JSON.

Takes the same arguments as the built-in `json.dumps()`, with some defaults from application configuration.

Parameters

- **obj** (*Any*) – Object to serialize to JSON.
- **app** (*Optional[Flask]*) – Use this app’s config instead of the active app context or defaults.
- **kwargs** (*Any*) – Extra arguments passed to `json.dumps()`.

Return type *str*

Changed in version 2.0.2: `decimal.Decimal` is supported by converting to a string.

Changed in version 2.0: `encoding` is deprecated and will be removed in Flask 2.1.

Changed in version 1.0.3: `app` can be passed directly, rather than requiring an app context for configuration.

`flask.json.dump(obj, fp, app=None, **kwargs)`

Serialize an object to JSON written to a file object.

Takes the same arguments as the built-in `json.dump()`, with some defaults from application configuration.

Parameters

- **obj** (*Any*) – Object to serialize to JSON.
- **fp** (*IO[str]*) – File object to write JSON to.
- **app** (*Optional[Flask]*) – Use this app’s config instead of the active app context or defaults.
- **kwargs** (*Any*) – Extra arguments passed to `json.dump()`.

Return type *None*

Changed in version 2.0: Writing to a binary file, and the `encoding` argument, is deprecated and will be removed in Flask 2.1.

`flask.json.loads(s, app=None, **kwargs)`

Deserialize an object from a string of JSON.

Takes the same arguments as the built-in `json.loads()`, with some defaults from application configuration.

Parameters

- **s** (*str*) – JSON string to deserialize.
- **app** (*Optional[Flask]*) – Use this app’s config instead of the active app context or defaults.
- **kwargs** (*Any*) – Extra arguments passed to `json.loads()`.

Return type *Any*

Changed in version 2.0: `encoding` is deprecated and will be removed in Flask 2.1. The data must be a string or UTF-8 bytes.

Changed in version 1.0.3: `app` can be passed directly, rather than requiring an app context for configuration.

`flask.json.load(fp, app=None, **kwargs)`

Deserialize an object from JSON read from a file object.

Takes the same arguments as the built-in `json.load()`, with some defaults from application configuration.

Parameters

- **fp** (*IO[str]*) – File object to read JSON from.
- **app** (*Optional[Flask]*) – Use this app’s config instead of the active app context or defaults.
- **kwargs** (*Any*) – Extra arguments passed to `json.load()`.

Return type

Any

Changed in version 2.0: `encoding` is deprecated and will be removed in Flask 2.1. The file must be text mode, or binary mode with UTF-8 bytes.

class `flask.json.JSONEncoder`(* , skipkeys=False, ensure_ascii=True, check_circular=True, allow_nan=True, sort_keys=False, indent=None, separators=None, default=None)

The default JSON encoder. Handles extra types compared to the built-in `json.JSONEncoder`.

- `datetime.datetime` and `datetime.date` are serialized to **RFC 822** strings. This is the same as the HTTP date format.
- `uuid.UUID` is serialized to a string.
- `dataclasses.dataclass` is passed to `dataclasses.asdict()`.
- *Markup* (or any object with a `__html__` method) will call the `__html__` method to get a string.

Assign a subclass of this to `flask.Flask.json_encoder` or `flask.Blueprint.json_encoder` to override the default.

default(o)

Convert `o` to a JSON serializable type. See `json.JSONEncoder.default()`. Python does not support overriding how basic types like `str` or `list` are serialized, they are handled before this method.

Parameters `o` (*Any*) –

Return type Any

class `flask.json.JSONDecoder`(* , object_hook=None, parse_float=None, parse_int=None, parse_constant=None, strict=True, object_pairs_hook=None)

The default JSON decoder.

This does not change any behavior from the built-in `json.JSONDecoder`.

Assign a subclass of this to `flask.Flask.json_decoder` or `flask.Blueprint.json_decoder` to override the default.

Tagged JSON

A compact representation for lossless serialization of non-standard JSON types. `SecureCookieSessionInterface` uses this to serialize the session data, but it may be useful in other places. It can be extended to support other types.

class `flask.json.tag.TaggedJSONSerializer`

Serializer that uses a tag system to compactly represent objects that are not JSON types. Passed as the intermediate serializer to `itsdangerous.Serializer`.

The following extra types are supported:

- `dict`
- `tuple`

- `bytes`
- `Markup`
- `UUID`
- `datetime`

Return type `None`

```
default_tags = [<class 'flask.json.tag.TagDict'>, <class  
'flask.json.tag.PassDict'>, <class 'flask.json.tag.TagTuple'>, <class  
'flask.json.tag.PassList'>, <class 'flask.json.tag.TagBytes'>, <class  
'flask.json.tag.TagMarkup'>, <class 'flask.json.tag.TagUUID'>, <class  
'flask.json.tag.TagDateTime'>]
```

Tag classes to bind when creating the serializer. Other tags can be added later using `register()`.

dumps (*value*)

Tag the value and dump it to a compact JSON string.

Parameters *value* (*Any*) –

Return type `str`

loads (*value*)

Load data from a JSON string and deserialized any tagged objects.

Parameters *value* (*str*) –

Return type *Any*

register (*tag_class*, *force=False*, *index=None*)

Register a new tag with this serializer.

Parameters

- **tag_class** (*Type*[`flask.json.tag.JSONTag`]) – tag class to register. Will be instantiated with this serializer instance.
- **force** (*bool*) – overwrite an existing tag. If false (default), a `KeyError` is raised.
- **index** (*Optional*[*int*]) – index to insert the new tag in the tag order. Useful when the new tag is a special case of an existing tag. If `None` (default), the tag is appended to the end of the order.

Raises `KeyError` – if the tag key is already registered and *force* is not true.

Return type `None`

tag (*value*)

Convert a value to a tagged representation if necessary.

Parameters *value* (*Any*) –

Return type `Dict[str, Any]`

untag (*value*)

Convert a tagged representation back to the original type.

Parameters *value* (*Dict*[*str*, *Any*]) –

Return type *Any*

class `flask.json.tag.JSONTag`(*serializer*)

Base class for defining type tags for `TaggedJSONSerializer`.

Parameters *serializer* (`TaggedJSONSerializer`) –

Return type `None`

check(*value*)

Check if the given value should be tagged by this tag.

Parameters *value* (*Any*) –

Return type `bool`

key: `Optional[str] = None`

The tag to mark the serialized object with. If `None`, this tag is only used as an intermediate step during tagging.

tag(*value*)

Convert the value to a valid JSON type and add the tag structure around it.

Parameters *value* (*Any*) –

Return type *Any*

to_json(*value*)

Convert the Python object to an object that is a valid JSON type. The tag will be added later.

Parameters *value* (*Any*) –

Return type *Any*

to_python(*value*)

Convert the JSON representation back to the correct type. The tag will already be removed.

Parameters *value* (*Any*) –

Return type *Any*

Let's see an example that adds support for `OrderedDict`. Dicts don't have an order in JSON, so to handle this we will dump the items as a list of `[key, value]` pairs. Subclass `JSONTag` and give it the new key `'od'` to identify the type. The session serializer processes dicts first, so insert the new tag at the front of the order since `OrderedDict` must be processed before `dict`.

```
from flask.json.tag import JSONTag

class TagOrderedDict(JSONTag):
    __slots__ = ('serializer',)
    key = 'od'

    def check(self, value):
        return isinstance(value, OrderedDict)

    def to_json(self, value):
        return [[k, self.serializer.tag(v)] for k, v in iteritems(value)]

    def to_python(self, value):
        return OrderedDict(value)

app.session_interface.serializer.register(TagOrderedDict, index=0)
```

2.1.13 Template Rendering

`flask.render_template(template_name_or_list, **context)`

Renders a template from the template folder with the given context.

Parameters

- **template_name_or_list** (*Union[str, List[str]]*) – the name of the template to be rendered, or an iterable with template names the first one existing will be rendered
- **context** (*Any*) – the variables that should be available in the context of the template.

Return type `str`

`flask.render_template_string(source, **context)`

Renders a template from the given template source string with the given context. Template variables will be autoescaped.

Parameters

- **source** (*str*) – the source code of the template to be rendered
- **context** (*Any*) – the variables that should be available in the context of the template.

Return type `str`

`flask.get_template_attribute(template_name, attribute)`

Loads a macro (or variable) a template exports. This can be used to invoke a macro from within Python code. If you for example have a template named `_cider.html` with the following contents:

```
{% macro hello(name) %}Hello {{ name }}!{% endmacro %}
```

You can access this from Python code like this:

```
hello = get_template_attribute('_cider.html', 'hello')
return hello('World')
```

New in version 0.2.

Parameters

- **template_name** (*str*) – the name of the template
- **attribute** (*str*) – the name of the variable of macro to access

Return type `Any`

2.1.14 Configuration

`class flask.Config(root_path, defaults=None)`

Works exactly like a dict but provides ways to fill it from files or special dictionaries. There are two common patterns to populate the config.

Either you can fill the config from a config file:

```
app.config.from_pyfile('yourconfig.cfg')
```

Or alternatively you can define the configuration options in the module that calls `from_object()` or provide an import path to a module that should be loaded. It is also possible to tell it to use the same module and with that provide the configuration values just before the call:

```
DEBUG = True
SECRET_KEY = 'development key'
app.config.from_object(__name__)
```

In both cases (loading from any Python file or loading from modules), only uppercase keys are added to the config. This makes it possible to use lowercase values in the config file for temporary values that are not added to the config or to define the config keys in the same file that implements the application.

Probably the most interesting way to load configurations is from an environment variable pointing to a file:

```
app.config.from_envvar('YOURAPPLICATION_SETTINGS')
```

In this case before launching the application you have to set this environment variable to the file you want to use. On Linux and OS X use the export statement:

```
export YOURAPPLICATION_SETTINGS='/path/to/config/file'
```

On windows use *set* instead.

Parameters

- **root_path** (*str*) – path to which files are read relative from. When the config object is created by the application, this is the application's *root_path*.
- **defaults** (*Optional[dict]*) – an optional dictionary of default values

Return type `None`

from_envvar(*variable_name, silent=False*)

Loads a configuration from an environment variable pointing to a configuration file. This is basically just a shortcut with nicer error messages for this line of code:

```
app.config.from_pyfile(os.environ['YOURAPPLICATION_SETTINGS'])
```

Parameters

- **variable_name** (*str*) – name of the environment variable
- **silent** (*bool*) – set to True if you want silent failure for missing files.

Returns True if the file was loaded successfully.

Return type `bool`

from_file(*filename, load, silent=False*)

Update the values in the config from a file that is loaded using the load parameter. The loaded data is passed to the *from_mapping()* method.

```
import toml
app.config.from_file("config.toml", load=toml.load)
```

Parameters

- **filename** (*str*) – The path to the data file. This can be an absolute path or relative to the config root path.
- **load** (*Callable[[Reader], Mapping]* where *Reader* implements a *read* method.) – A callable that takes a file handle and returns a mapping of loaded data from the file.
- **silent** (*bool*) – Ignore the file if it doesn't exist.

Returns True if the file was loaded successfully.

Return type `bool`

New in version 2.0.

from_json(filename, silent=False)

Update the values in the config from a JSON file. The loaded data is passed to the `from_mapping()` method.

Parameters

- **filename** (*str*) – The path to the JSON file. This can be an absolute path or relative to the config root path.
- **silent** (*bool*) – Ignore the file if it doesn't exist.

Returns True if the file was loaded successfully.

Return type bool

Deprecated since version 2.0.0: Will be removed in Flask 2.1. Use `from_file()` instead. This was removed early in 2.0.0, was added back in 2.0.1.

New in version 0.11.

from_mapping(mapping=None, **kwargs)

Updates the config like `update()` ignoring items with non-upper keys. :return: Always returns True.

New in version 0.11.

Parameters

- **mapping** (*Optional[Mapping[str, Any]]*) –
- **kwargs** (*Any*) –

Return type bool

from_object(obj)

Updates the values from the given object. An object can be of one of the following two types:

- a string: in this case the object with that name will be imported
- an actual object reference: that object is used directly

Objects are usually either modules or classes. `from_object()` loads only the uppercase attributes of the module/class. A dict object will not work with `from_object()` because the keys of a dict are not attributes of the dict class.

Example of module-based configuration:

```
app.config.from_object('yourapplication.default_config')
from yourapplication import default_config
app.config.from_object(default_config)
```

Nothing is done to the object before loading. If the object is a class and has `@property` attributes, it needs to be instantiated before being passed to this method.

You should not use this function to load the actual configuration but rather configuration defaults. The actual config should be loaded with `from_pyfile()` and ideally from a location not within the package because the package might be installed system wide.

See *Development / Production* for an example of class-based configuration using `from_object()`.

Parameters **obj** (*Union[object, str]*) – an import name or object

Return type None

from_pyfile(filename, silent=False)

Updates the values in the config from a Python file. This function behaves as if the file was imported as module with the `from_object()` function.

Parameters

- **filename** (*str*) – the filename of the config. This can either be an absolute filename or a filename relative to the root path.

- **silent** (*bool*) – set to `True` if you want silent failure for missing files.

Returns `True` if the file was loaded successfully.

Return type `bool`

New in version 0.7: *silent* parameter.

get_namespace(*namespace, lowercase=True, trim_namespace=True*)

Returns a dictionary containing a subset of configuration options that match the specified namespace/prefix. Example usage:

```
app.config['IMAGE_STORE_TYPE'] = 'fs'
app.config['IMAGE_STORE_PATH'] = '/var/app/images'
app.config['IMAGE_STORE_BASE_URL'] = 'http://img.website.com'
image_store_config = app.config.get_namespace('IMAGE_STORE_')
```

The resulting dictionary *image_store_config* would look like:

```
{
  'type': 'fs',
  'path': '/var/app/images',
  'base_url': 'http://img.website.com'
}
```

This is often useful when configuration options map directly to keyword arguments in functions or class constructors.

Parameters

- **namespace** (*str*) – a configuration namespace
- **lowercase** (*bool*) – a flag indicating if the keys of the resulting dictionary should be lowercase
- **trim_namespace** (*bool*) – a flag indicating if the keys of the resulting dictionary should not include the namespace

Return type `Dict[str, Any]`

New in version 0.11.

2.1.15 Stream Helpers

`flask.stream_with_context`(*generator_or_function*)

Request contexts disappear when the response is started on the server. This is done for efficiency reasons and to make it less likely to encounter memory leaks with badly written WSGI middlewares. The downside is that if you are using streamed responses, the generator cannot access request bound information any more.

This function however can help you keep the context around for longer:

```
from flask import stream_with_context, request, Response

@app.route('/stream')
def streamed_response():
    @stream_with_context
    def generate():
        yield 'Hello '
        yield request.args['name']
        yield '!'
    return Response(generate())
```

Alternatively it can also be used around a specific generator:

```
from flask import stream_with_context, request, Response

@app.route('/stream')
def streamed_response():
    def generate():
        yield 'Hello '
        yield request.args['name']
        yield '!'
    return Response(stream_with_context(generate()))
```

New in version 0.9.

Parameters `generator_or_function` (`Union[Iterator, Callable[[...], Iterator]]`) –

Return type `Iterator`

2.1.16 Useful Internals

class `flask.ctx.RequestContext`(`app`, `environ`, `request=None`, `session=None`)

The request context contains all request relevant information. It is created at the beginning of the request and pushed to the `_request_ctx_stack` and removed at the end of it. It will create the URL adapter and request object for the WSGI environment provided.

Do not attempt to use this class directly, instead use `test_request_context()` and `request_context()` to create this object.

When the request context is popped, it will evaluate all the functions registered on the application for tear-down execution (`teardown_request()`).

The request context is automatically popped at the end of the request for you. In debug mode the request context is kept around if exceptions happen so that interactive debuggers have a chance to introspect the data. With 0.4 this can also be forced for requests that did not fail and outside of DEBUG mode. By setting `'flask._preserve_context'` to `True` on the WSGI environment the context will not pop itself at the end of the request. This is used by the `test_client()` for example to implement the deferred cleanup functionality.

You might find this helpful for unittests where you need the information from the context local around for a little longer. Make sure to properly `pop()` the stack yourself in that situation, otherwise your unittests will leak memory.

Parameters

- **app** (`Flask`) –
- **environ** (`dict`) –
- **request** (`Optional[Request]`) –
- **session** (`Optional[SessionMixin]`) –

Return type `None`

`copy()`

Creates a copy of this request context with the same request object. This can be used to move a request context to a different greenlet. Because the actual request object is the same this cannot be used to move a request context to a different thread unless access to the request object is locked.

Changed in version 1.1: The current session object is used instead of reloading the original data. This prevents `flask.session` pointing to an out-of-date object.

New in version 0.10.

Return type `flask.ctx.RequestContext`

match_request()

Can be overridden by a subclass to hook into the matching of the request.

Return type `None`

pop(exc=<object object>)

Pops the request context and unbinds it by doing that. This will also trigger the execution of functions registered by the `teardown_request()` decorator.

Changed in version 0.9: Added the `exc` argument.

Parameters `exc` (`Optional[BaseException]`) –

Return type `None`

push()

Binds the request context to the current context.

Return type `None`

flask._request_ctx_stack

The internal `LocalStack` that holds `RequestContext` instances. Typically, the `request` and `session` proxies should be accessed instead of the stack. It may be useful to access the stack in extension code.

The following attributes are always present on each layer of the stack:

app the active Flask application.

url_adapter the URL adapter that was used to match the request.

request the current request object.

session the active session object.

g an object with all the attributes of the `flask.g` object.

flashes an internal cache for the flashed messages.

Example usage:

```
from flask import _request_ctx_stack

def get_session():
    ctx = _request_ctx_stack.top
    if ctx is not None:
        return ctx.session
```

class flask.ctx.AppContext(app)

The application context binds an application object implicitly to the current thread or greenlet, similar to how the `RequestContext` binds request information. The application context is also implicitly created if a request context is created but the application is not on top of the individual application context.

Parameters `app` (`Flask`) –

Return type `None`

pop(exc=<object object>)

Pops the app context.

Parameters `exc` (`Optional[BaseException]`) –

Return type `None`

push()

Binds the app context to the current context.

Return type `None`

`flask._app_ctx_stack`

The internal `LocalStack` that holds `AppContext` instances. Typically, the `current_app` and `g` proxies should be accessed instead of the stack. Extensions can access the contexts on the stack as a namespace to store data.

New in version 0.9.

class `flask.blueprints.BlueprintSetupState`(*blueprint, app, options, first_registration*)

Temporary holder object for registering a blueprint with the application. An instance of this class is created by the `make_setup_state()` method and later passed to all register callback functions.

Parameters

- **blueprint** (`Blueprint`) –
- **app** (`Flask`) –
- **options** (`Any`) –
- **first_registration** (`bool`) –

Return type `None`

add_url_rule(*rule, endpoint=None, view_func=None, **options*)

A helper method to register a rule (and optionally a view function) to the application. The endpoint is automatically prefixed with the blueprint's name.

Parameters

- **rule** (`str`) –
- **endpoint** (`Optional[str]`) –
- **view_func** (`Optional[Callable]`) –
- **options** (`Any`) –

Return type `None`

app

a reference to the current application

blueprint

a reference to the blueprint that created this setup state.

first_registration

as blueprints can be registered multiple times with the application and not everything wants to be registered multiple times on it, this attribute can be used to figure out if the blueprint was registered in the past already.

options

a dictionary with all options that were passed to the `register_blueprint()` method.

subdomain

The subdomain that the blueprint should be active for, `None` otherwise.

url_defaults

A dictionary with URL defaults that is added to each and every URL that was defined with the blueprint.

url_prefix

The prefix that should be used for all URLs defined on the blueprint.

2.1.17 Signals

New in version 0.6.

`signals.signals_available`

True if the signaling system is available. This is the case when `blinker` is installed.

The following signals exist in Flask:

`flask.template_rendered`

This signal is sent when a template was successfully rendered. The signal is invoked with the instance of the template as `template` and the context as dictionary (named `context`).

Example subscriber:

```
def log_template_renders(sender, template, context, **extra):
    sender.logger.debug('Rendering template "%s" with context %s',
                        template.name or 'string template',
                        context)

from flask import template_rendered
template_rendered.connect(log_template_renders, app)
```

`flask.before_render_template`

This signal is sent before template rendering process. The signal is invoked with the instance of the template as `template` and the context as dictionary (named `context`).

Example subscriber:

```
def log_template_renders(sender, template, context, **extra):
    sender.logger.debug('Rendering template "%s" with context %s',
                        template.name or 'string template',
                        context)

from flask import before_render_template
before_render_template.connect(log_template_renders, app)
```

`flask.request_started`

This signal is sent when the request context is set up, before any request processing happens. Because the request context is already bound, the subscriber can access the request with the standard global proxies such as `request`.

Example subscriber:

```
def log_request(sender, **extra):
    sender.logger.debug('Request context is set up')

from flask import request_started
request_started.connect(log_request, app)
```

`flask.request_finished`

This signal is sent right before the response is sent to the client. It is passed the response to be sent named `response`.

Example subscriber:

```
def log_response(sender, response, **extra):
    sender.logger.debug('Request context is about to close down. '
                        'Response: %s', response)

from flask import request_finished
request_finished.connect(log_response, app)
```

flask.got_request_exception

This signal is sent when an unhandled exception happens during request processing, including when debugging. The exception is passed to the subscriber as `exception`.

This signal is not sent for `HTTPException`, or other exceptions that have error handlers registered, unless the exception was raised from an error handler.

This example shows how to do some extra logging if a theoretical `SecurityException` was raised:

```
from flask import got_request_exception

def log_security_exception(sender, exception, **extra):
    if not isinstance(exception, SecurityException):
        return

    security_logger.exception(
        f"SecurityException at {request.url!r}",
        exc_info=exception,
    )

got_request_exception.connect(log_security_exception, app)
```

flask.request_tearing_down

This signal is sent when the request is tearing down. This is always called, even if an exception is caused. Currently functions listening to this signal are called after the regular teardown handlers, but this is not something you can rely on.

Example subscriber:

```
def close_db_connection(sender, **extra):
    session.close()

from flask import request_tearing_down
request_tearing_down.connect(close_db_connection, app)
```

As of Flask 0.9, this will also be passed an `exc` keyword argument that has a reference to the exception that caused the teardown if there was one.

flask.appcontext_tearing_down

This signal is sent when the app context is tearing down. This is always called, even if an exception is caused. Currently functions listening to this signal are called after the regular teardown handlers, but this is not something you can rely on.

Example subscriber:

```
def close_db_connection(sender, **extra):
    session.close()

from flask import appcontext_tearing_down
appcontext_tearing_down.connect(close_db_connection, app)
```

This will also be passed an `exc` keyword argument that has a reference to the exception that caused the teardown if there was one.

flask.appcontext_pushed

This signal is sent when an application context is pushed. The sender is the application. This is usually useful for unittests in order to temporarily hook in information. For instance it can be used to set a resource early onto the `g` object.

Example usage:

```

from contextlib import contextmanager
from flask import appcontext_pushed

@contextmanager
def user_set(app, user):
    def handler(sender, **kwargs):
        g.user = user
    with appcontext_pushed.connected_to(handler, app):
        yield

```

And in the testcode:

```

def test_user_me(self):
    with user_set(app, 'john'):
        c = app.test_client()
        resp = c.get('/users/me')
        assert resp.data == 'username=john'

```

New in version 0.10.

flask.appcontext_popped

This signal is sent when an application context is popped. The sender is the application. This usually falls in line with the [appcontext_tearing_down](#) signal.

New in version 0.10.

flask.message_flashed

This signal is sent when the application is flashing a message. The messages is sent as *message* keyword argument and the category as *category*.

Example subscriber:

```

recorded = []
def record(sender, message, category, **extra):
    recorded.append((message, category))

from flask import message_flashed
message_flashed.connect(record, app)

```

New in version 0.10.

class signals.Namespace

An alias for [blinker.base.Namespace](#) if blinker is available, otherwise a dummy class that creates fake signals. This class is available for Flask extensions that want to provide the same fallback system as Flask itself.

signal(*name*, *doc=None*)

Creates a new signal for this namespace if blinker is available, otherwise returns a fake signal that has a `send` method that will do nothing but will fail with a [RuntimeError](#) for all other operations, including connecting.

2.1.18 Class-Based Views

New in version 0.7.

class flask.views.View

Alternative way to use view functions. A subclass has to implement `dispatch_request()` which is called with the view arguments from the URL routing system. If `methods` is provided the methods do not have to be passed to the `add_url_rule()` method explicitly:

```
class MyView(View):
    methods = ['GET']

    def dispatch_request(self, name):
        return f"Hello {name}!"

app.add_url_rule('/hello/<name>', view_func=MyView.as_view('myview'))
```

When you want to decorate a pluggable view you will have to either do that when the view function is created (by wrapping the return value of `as_view()`) or you can use the `decorators` attribute:

```
class SecretView(View):
    methods = ['GET']
    decorators = [superuser_required]

    def dispatch_request(self):
        ...
```

The decorators stored in the `decorators` list are applied one after another when the view function is created. Note that you can *not* use the class based decorators since those would decorate the view class and not the generated view function!

classmethod as_view(name, *class_args, **class_kwargs)

Converts the class into an actual view function that can be used with the routing system. Internally this generates a function on the fly which will instantiate the `View` on each request and call the `dispatch_request()` method on it.

The arguments passed to `as_view()` are forwarded to the constructor of the class.

Parameters

- **name** (*str*) –
- **class_args** (*Any*) –
- **class_kwargs** (*Any*) –

Return type Callable

decorators: List[Callable] = []

The canonical way to decorate class-based views is to decorate the return value of `as_view()`. However since this moves parts of the logic from the class declaration to the place where it's hooked into the routing system.

You can place one or more decorators in this list and whenever the view function is created the result is automatically decorated.

New in version 0.8.

dispatch_request()

Subclasses have to override this method to implement the actual view function code. This method is called with all the arguments from the URL rule.

Return type Union[*Response*, AnyStr, Dict[str, Any], Generator[AnyStr, None, None], Tuple[Union[*Response*, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str,

List[str], Tuple[str, ...]]]]], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int, Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], WSGIApplication]

methods: Optional[List[str]] = None

A list of methods this view can handle.

provide_automatic_options: Optional[bool] = None

Setting this disables or force-enables the automatic options handling.

class flask.views.MethodView

A class-based view that dispatches request methods to the corresponding class methods. For example, if you implement a get method, it will be used to handle GET requests.

```
class CounterAPI(MethodView):
    def get(self):
        return session.get('counter', 0)

    def post(self):
        session['counter'] = session.get('counter', 0) + 1
        return 'OK'

app.add_url_rule('/counter', view_func=CounterAPI.as_view('counter'))
```

dispatch_request(*args, **kwargs)

Subclasses have to override this method to implement the actual view function code. This method is called with all the arguments from the URL rule.

Parameters

- **args** (Any) –
- **kwargs** (Any) –

Return type Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int], Tuple[Union[Response, AnyStr, Dict[str, Any], Generator[AnyStr, None, None]], int, Union[Headers, Dict[str, Union[str, List[str], Tuple[str, ...]]], List[Tuple[str, Union[str, List[str], Tuple[str, ...]]]]], WSGIApplication]

2.1.19 URL Route Registrations

Generally there are three ways to define rules for the routing system:

1. You can use the `flask.Flask.route()` decorator.
2. You can use the `flask.Flask.add_url_rule()` function.
3. You can directly access the underlying Werkzeug routing system which is exposed as `flask.Flask.url_map`.

Variable parts in the route can be specified with angular brackets (`/user/<username>`). By default a variable part in the URL accepts any string without a slash however a different converter can be specified as well by using `<converter:name>`.

Variable parts are passed to the view function as keyword arguments.

The following converters are available:

<i>string</i>	accepts any text without a slash (the default)
<i>int</i>	accepts integers
<i>float</i>	like <i>int</i> but for floating point values
<i>path</i>	like the default but also accepts slashes
<i>any</i>	matches one of the items provided
<i>uuid</i>	accepts UUID strings

Custom converters can be defined using `flask.Flask.url_map`.

Here are some examples:

```
@app.route('/')
def index():
    pass

@app.route('/<username>')
def show_user(username):
    pass

@app.route('/post/<int:post_id>')
def show_post(post_id):
    pass
```

An important detail to keep in mind is how Flask deals with trailing slashes. The idea is to keep each URL unique so the following rules apply:

1. If a rule ends with a slash and is requested without a slash by the user, the user is automatically redirected to the same page with a trailing slash attached.
2. If a rule does not end with a trailing slash and the user requests the page with a trailing slash, a 404 not found is raised.

This is consistent with how web servers deal with static files. This also makes it possible to use relative link targets safely.

You can also define multiple rules for the same function. They have to be unique however. Defaults can also be specified. Here for example is a definition for a URL that accepts an optional page:

```
@app.route('/users/', defaults={'page': 1})
@app.route('/users/page/<int:page>')
def show_users(page):
    pass
```

This specifies that `/users/` will be the URL for page one and `/users/page/N` will be the URL for page N.

If a URL contains a default value, it will be redirected to its simpler form with a 301 redirect. In the above example, `/users/page/1` will be redirected to `/users/`. If your route handles GET and POST requests, make sure the default route only handles GET, as redirects can't preserve form data.

```
@app.route('/region/', defaults={'id': 1})
@app.route('/region/<int:id>', methods=['GET', 'POST'])
def region(id):
    pass
```

Here are the parameters that `route()` and `add_url_rule()` accept. The only difference is that with the route parameter the view function is defined with the decorator instead of the `view_func` parameter.

<i>rule</i>	the URL rule as string
<i>end-point</i>	the endpoint for the registered URL rule. Flask itself assumes that the name of the view function is the name of the endpoint if not explicitly stated.
<i>view</i>	the function to call when serving a request to the provided endpoint. If this is not provided one can specify the function later by storing it in the <i>view_functions</i> dictionary with the endpoint as key.
<i>defaults</i>	A dictionary with defaults for this rule. See the example above for how defaults work.
<i>sub-domain</i>	specifies the rule for the subdomain in case subdomain matching is in use. If not specified the default subdomain is assumed.
<i>**options</i>	the options to be forwarded to the underlying <i>Rule</i> object. A change to Werkzeug is handling of method options. <i>methods</i> is a list of methods this rule should be limited to (GET, POST etc.). By default a rule just listens for GET (and implicitly HEAD). Starting with Flask 0.6, <i>OPTIONS</i> is implicitly added and handled by the standard request handling. They have to be specified as keyword arguments.

2.1.20 View Function Options

For internal usage the view functions can have some attributes attached to customize behavior the view function would normally not have control over. The following attributes can be provided optionally to either override some defaults to *add_url_rule()* or general behavior:

- *__name__*: The name of a function is by default used as endpoint. If endpoint is provided explicitly this value is used. Additionally this will be prefixed with the name of the blueprint by default which cannot be customized from the function itself.
- *methods*: If methods are not provided when the URL rule is added, Flask will look on the view function object itself if a *methods* attribute exists. If it does, it will pull the information for the methods from there.
- *provide_automatic_options*: if this attribute is set Flask will either force enable or disable the automatic implementation of the HTTP *OPTIONS* response. This can be useful when working with decorators that want to customize the *OPTIONS* response on a per-view basis.
- *required_methods*: if this attribute is set, Flask will always add these methods when registering a URL rule even if the methods were explicitly overridden in the *route()* call.

Full example:

```
def index():
    if request.method == 'OPTIONS':
        # custom options handling here
        ...
    return 'Hello World!'
index.provide_automatic_options = False
index.methods = ['GET', 'OPTIONS']

app.add_url_rule('/', index)
```

New in version 0.8: The *provide_automatic_options* functionality was added.

2.1.21 Command Line Interface

class flask.cli.**FlaskGroup**(*add_default_commands=True, create_app=None, add_version_option=True, load_dotenv=True, set_debug_flag=True, **extra*)

Special subclass of the [AppGroup](#) group that supports loading more commands from the configured Flask app. Normally a developer does not have to interface with this class but there are some very advanced use cases for which it makes sense to create an instance of this. see [Custom Scripts](#).

Parameters

- **add_default_commands** – if this is True then the default run and shell commands will be added.
- **add_version_option** – adds the `--version` option.
- **create_app** – an optional callback that is passed the script info and returns the loaded app.
- **load_dotenv** – Load the nearest `.env` and `.flaskenv` files to set environment variables. Will also change the working directory to the directory containing the first file found.
- **set_debug_flag** – Set the app's debug flag based on the active environment

Changed in version 1.0: If installed, python-dotenv will be used to load environment variables from `.env` and `.flaskenv` files.

get_command(*ctx, name*)

Given a context and a command name, this returns a `Command` object if it exists or returns `None`.

list_commands(*ctx*)

Returns a list of subcommand names in the order they should appear.

main(**args, **kwargs*)

This is the way to invoke a script with all the bells and whistles as a command line application. This will always terminate the application after a call. If this is not wanted, `SystemExit` needs to be caught.

This method is also available by directly calling the instance of a `Command`.

New in version 3.0: Added the `standalone_mode` flag to control the standalone mode.

Parameters

- **args** – the arguments that should be used for parsing. If not provided, `sys.argv[1:]` is used.
- **prog_name** – the program name that should be used. By default the program name is constructed by taking the file name from `sys.argv[0]`.
- **complete_var** – the environment variable that controls the bash completion support. The default is `"_<prog_name>_COMPLETE"` with `prog_name` in uppercase.
- **standalone_mode** – the default behavior is to invoke the script in standalone mode. Click will then handle exceptions and convert them into error messages and the function will never return but shut down the interpreter. If this is set to `False` they will be propagated to the caller and the return value of this function is the return value of `invoke()`.
- **extra** – extra keyword arguments are forwarded to the context constructor. See [Context](#) for more information.

class flask.cli.**AppGroup**(*name=None, commands=None, **attrs*)

This works similar to a regular click [Group](#) but it changes the behavior of the [command\(\)](#) decorator so that it automatically wraps the functions in [with_appcontext\(\)](#).

Not to be confused with [FlaskGroup](#).

command(*args, **kwargs)

This works exactly like the method of the same name on a regular `click.Group` but it wraps callbacks in `with_appcontext()` unless it's disabled by passing `with_appcontext=False`.

group(*args, **kwargs)

This works exactly like the method of the same name on a regular `click.Group` but it defaults the group class to `AppGroup`.

class flask.cli.ScriptInfo(app_import_path=None, create_app=None, set_debug_flag=True)

Helper object to deal with Flask applications. This is usually not necessary to interface with as it's used internally in the dispatching to click. In future versions of Flask this object will most likely play a bigger role. Typically it's created automatically by the `FlaskGroup` but you can also manually create it and pass it onwards as click object.

app_import_path

Optionally the import path for the Flask application.

create_app

Optionally a function that is passed the script info to create the instance of the application.

data

A dictionary with arbitrary data that can be associated with this script info.

load_app()

Loads the Flask app (if not yet loaded) and returns it. Calling this multiple times will just result in the already loaded app to be returned.

flask.cli.load_dotenv(path=None)

Load "dotenv" files in order of precedence to set environment variables.

If an env var is already set it is not overwritten, so earlier files in the list are preferred over later files.

This is a no-op if `python-dotenv` is not installed.

Parameters `path` – Load the file at this location instead of searching.

Returns True if a file was loaded.

Changed in version 2.0: When loading the env files, set the default encoding to UTF-8.

Changed in version 1.1.0: Returns `False` when `python-dotenv` is not installed, or when the given path isn't a file.

New in version 1.0.

flask.cli.with_appcontext(f)

Wraps a callback so that it's guaranteed to be executed with the script's application context. If callbacks are registered directly to the `app.cli` object then they are wrapped with this function by default unless it's disabled.

flask.cli.pass_script_info(f)

Marks a function so that an instance of `ScriptInfo` is passed as first argument to the click callback.

flask.cli.run_command = `<Command run>`

Run a local development server.

This server is for development purposes only. It does not provide the stability, security, or performance of production WSGI servers.

The reloader and debugger are enabled by default if `FLASK_ENV=development` or `FLASK_DEBUG=1`.

flask.cli.shell_command = `<Command shell>`

Run an interactive Python shell in the context of a given Flask application. The application will populate the default namespace of this shell according to its configuration.

This is useful for executing small snippets of management code without having to manually configure the application.

ADDITIONAL NOTES

Design notes, legal information and changelog are here for the interested.

3.1 Design Decisions in Flask

If you are curious why Flask does certain things the way it does and not differently, this section is for you. This should give you an idea about some of the design decisions that may appear arbitrary and surprising at first, especially in direct comparison with other frameworks.

3.1.1 The Explicit Application Object

A Python web application based on WSGI has to have one central callable object that implements the actual application. In Flask this is an instance of the *Flask* class. Each Flask application has to create an instance of this class itself and pass it the name of the module, but why can't Flask do that itself?

Without such an explicit application object the following code:

```
from flask import Flask
app = Flask(__name__)

@app.route('/')
def index():
    return 'Hello World!'
```

Would look like this instead:

```
from hypothetical_flask import route

@route('/')
def index():
    return 'Hello World!'
```

There are three major reasons for this. The most important one is that implicit application objects require that there may only be one instance at the time. There are ways to fake multiple applications with a single application object, like maintaining a stack of applications, but this causes some problems I won't outline here in detail. Now the question is: when does a microframework need more than one application at the same time? A good example for this is unit testing. When you want to test something it can be very helpful to create a minimal application to test specific behavior. When the application object is deleted everything it allocated will be freed again.

Another thing that becomes possible when you have an explicit object lying around in your code is that you can subclass the base class (*Flask*) to alter specific behavior. This would not be possible without hacks if the object were created ahead of time for you based on a class that is not exposed to you.

But there is another very important reason why Flask depends on an explicit instantiation of that class: the package name. Whenever you create a Flask instance you usually pass it *__name__* as package name. Flask depends on that information to properly load resources relative to your module. With Python's outstanding support for reflection it

can then access the package to figure out where the templates and static files are stored (see `open_resource()`). Now obviously there are frameworks around that do not need any configuration and will still be able to load templates relative to your application module. But they have to use the current working directory for that, which is a very unreliable way to determine where the application is. The current working directory is process-wide and if you are running multiple applications in one process (which could happen in a webserver without you knowing) the paths will be off. Worse: many web servers do not set the working directory to the directory of your application but to the document root which does not have to be the same folder.

The third reason is “explicit is better than implicit”. That object is your WSGI application, you don’t have to remember anything else. If you want to apply a WSGI middleware, just wrap it and you’re done (though there are better ways to do that so that you do not lose the reference to the application object `wsgi_app()`).

Furthermore this design makes it possible to use a factory function to create the application which is very helpful for unit testing and similar things (*Application Factories*).

3.1.2 The Routing System

Flask uses the Werkzeug routing system which was designed to automatically order routes by complexity. This means that you can declare routes in arbitrary order and they will still work as expected. This is a requirement if you want to properly implement decorator based routing since decorators could be fired in undefined order when the application is split into multiple modules.

Another design decision with the Werkzeug routing system is that routes in Werkzeug try to ensure that URLs are unique. Werkzeug will go quite far with that in that it will automatically redirect to a canonical URL if a route is ambiguous.

3.1.3 One Template Engine

Flask decides on one template engine: Jinja2. Why doesn’t Flask have a pluggable template engine interface? You can obviously use a different template engine, but Flask will still configure Jinja2 for you. While that limitation that Jinja2 is *always* configured will probably go away, the decision to bundle one template engine and use that will not.

Template engines are like programming languages and each of those engines has a certain understanding about how things work. On the surface they all work the same: you tell the engine to evaluate a template with a set of variables and take the return value as string.

But that’s about where similarities end. Jinja2 for example has an extensive filter system, a certain way to do template inheritance, support for reusable blocks (macros) that can be used from inside templates and also from Python code, supports iterative template rendering, configurable syntax and more. On the other hand an engine like Genshi is based on XML stream evaluation, template inheritance by taking the availability of XPath into account and more. Mako on the other hand treats templates similar to Python modules.

When it comes to connecting a template engine with an application or framework there is more than just rendering templates. For instance, Flask uses Jinja2’s extensive autoescaping support. Also it provides ways to access macros from Jinja2 templates.

A template abstraction layer that would not take the unique features of the template engines away is a science on its own and a too large undertaking for a microframework like Flask.

Furthermore extensions can then easily depend on one template language being present. You can easily use your own templating language, but an extension could still depend on Jinja itself.

3.1.4 Micro with Dependencies

Why does Flask call itself a microframework and yet it depends on two libraries (namely Werkzeug and Jinja2). Why shouldn't it? If we look over to the Ruby side of web development there we have a protocol very similar to WSGI. Just that it's called Rack there, but besides that it looks very much like a WSGI rendition for Ruby. But nearly all applications in Ruby land do not work with Rack directly, but on top of a library with the same name. This Rack library has two equivalents in Python: WebOb (formerly Paste) and Werkzeug. Paste is still around but from my understanding it's sort of deprecated in favour of WebOb. The development of WebOb and Werkzeug started side by side with similar ideas in mind: be a good implementation of WSGI for other applications to take advantage.

Flask is a framework that takes advantage of the work already done by Werkzeug to properly interface WSGI (which can be a complex task at times). Thanks to recent developments in the Python package infrastructure, packages with dependencies are no longer an issue and there are very few reasons against having libraries that depend on others.

3.1.5 Thread Locals

Flask uses thread local objects (context local objects in fact, they support greenlet contexts as well) for request, session and an extra object you can put your own things on (*g*). Why is that and isn't that a bad idea?

Yes it is usually not such a bright idea to use thread locals. They cause troubles for servers that are not based on the concept of threads and make large applications harder to maintain. However Flask is just not designed for large applications or asynchronous servers. Flask wants to make it quick and easy to write a traditional web application.

Also see the *Becoming Big* section of the documentation for some inspiration for larger applications based on Flask.

3.1.6 Async/await and ASGI support

Flask supports `async` coroutines for view functions by executing the coroutine on a separate thread instead of using an event loop on the main thread as an `async-first` (ASGI) framework would. This is necessary for Flask to remain backwards compatible with extensions and code built before `async` was introduced into Python. This compromise introduces a performance cost compared with the ASGI frameworks, due to the overhead of the threads.

Due to how tied to WSGI Flask's code is, it's not clear if it's possible to make the `Flask` class support ASGI and WSGI at the same time. Work is currently being done in Werkzeug to work with ASGI, which may eventually enable support in Flask as well.

See *Using `async` and `await`* for more discussion.

3.1.7 What Flask is, What Flask is Not

Flask will never have a database layer. It will not have a form library or anything else in that direction. Flask itself just bridges to Werkzeug to implement a proper WSGI application and to Jinja2 to handle templating. It also binds to a few common standard library packages such as logging. Everything else is up for extensions.

Why is this the case? Because people have different preferences and requirements and Flask could not meet those if it would force any of this into the core. The majority of web applications will need a template engine in some sort. However not every application needs a SQL database.

The idea of Flask is to build a good foundation for all applications. Everything else is up to you or extensions.

3.2 HTML/XHTML FAQ

The Flask documentation and example applications are using HTML5. You may notice that in many situations, when end tags are optional they are not used, so that the HTML is cleaner and faster to load. Because there is much confusion about HTML and XHTML among developers, this document tries to answer some of the major questions.

3.2.1 History of XHTML

For a while, it appeared that HTML was about to be replaced by XHTML. However, barely any websites on the Internet are actual XHTML (which is HTML processed using XML rules). There are a couple of major reasons why this is the case. One of them is Internet Explorer's lack of proper XHTML support. The XHTML spec states that XHTML must be served with the MIME type *application/xhtml+xml*, but Internet Explorer refuses to read files with that MIME type. While it is relatively easy to configure Web servers to serve XHTML properly, few people do. This is likely because properly using XHTML can be quite painful.

One of the most important causes of pain is XML's draconian (strict and ruthless) error handling. When an XML parsing error is encountered, the browser is supposed to show the user an ugly error message, instead of attempting to recover from the error and display what it can. Most of the (X)HTML generation on the web is based on non-XML template engines (such as Jinja, the one used in Flask) which do not protect you from accidentally creating invalid XHTML. There are XML based template engines, such as Kid and the popular Genshi, but they often come with a larger runtime overhead and are not as straightforward to use because they have to obey XML rules.

The majority of users, however, assumed they were properly using XHTML. They wrote an XHTML doctype at the top of the document and self-closed all the necessary tags (`
` becomes `
` or `
</br>` in XHTML). However, even if the document properly validates as XHTML, what really determines XHTML/HTML processing in browsers is the MIME type, which as said before is often not set properly. So the valid XHTML was being treated as invalid HTML.

XHTML also changed the way JavaScript is used. To properly work with XHTML, programmers have to use the namespaced DOM interface with the XHTML namespace to query for HTML elements.

3.2.2 History of HTML5

Development of the HTML5 specification was started in 2004 under the name "Web Applications 1.0" by the Web Hypertext Application Technology Working Group, or WHATWG (which was formed by the major browser vendors Apple, Mozilla, and Opera) with the goal of writing a new and improved HTML specification, based on existing browser behavior instead of unrealistic and backwards-incompatible specifications.

For example, in HTML4 `<title>Hello/` theoretically parses exactly the same as `<title>Hello</title>`. However, since people were using XHTML-like tags along the lines of `<link />`, browser vendors implemented the XHTML syntax over the syntax defined by the specification.

In 2007, the specification was adopted as the basis of a new HTML specification under the umbrella of the W3C, known as HTML5. Currently, it appears that XHTML is losing traction, as the XHTML 2 working group has been disbanded and HTML5 is being implemented by all major browser vendors.

3.2.3 HTML versus XHTML

The following table gives you a quick overview of features available in HTML 4.01, XHTML 1.1 and HTML5. (XHTML 1.0 is not included, as it was superseded by XHTML 1.1 and the barely-used XHTML5.)

	HTML4.01	XHTML1.1	HTML5
<code><tag/value/ == <tag>value</tag></code>	✓ ¹	✗	✗
<code>
</code> supported	✗	✓	✓ ²
<code><script/></code> supported	✗	✓	✗
should be served as <i>text/html</i>	✓	✗ ³	✓
should be served as <i>application/xhtml+xml</i>	✗	✓	✗
strict error handling	✗	✓	✗
inline SVG	✗	✓	✓
inline MathML	✗	✓	✓
<code><video></code> tag	✗	✗	✓
<code><audio></code> tag	✗	✗	✓
New semantic tags like <code><article></code>	✗	✗	✓

3.2.4 What does “strict” mean?

HTML5 has strictly defined parsing rules, but it also specifies exactly how a browser should react to parsing errors - unlike XHTML, which simply states parsing should abort. Some people are confused by apparently invalid syntax that still generates the expected results (for example, missing end tags or unquoted attribute values).

Some of these work because of the lenient error handling most browsers use when they encounter a markup error, others are actually specified. The following constructs are optional in HTML5 by standard, but have to be supported by browsers:

- Wrapping the document in an `<html>` tag
- Wrapping header elements in `<head>` or the body elements in `<body>`
- Closing the `<p>`, ``, `<dt>`, `<dd>`, `<tr>`, `<td>`, `<th>`, `<tbody>`, `<thead>`, or `<tfoot>` tags.
- Quoting attributes, so long as they contain no whitespace or special characters (like `<`, `>`, `'`, or `"`).
- Requiring boolean attributes to have a value.

This means the following page in HTML5 is perfectly valid:

```
<!doctype html>
<title>Hello HTML5</title>
<div class=header>
  <h1>Hello HTML5</h1>
  <p class=tagline>HTML5 is awesome
</div>
<ul class=nav>
  <li><a href=/index>Index</a>
  <li><a href=/downloads>Downloads</a>
  <li><a href=/about>About</a>
</ul>
<div class=body>
```

(continues on next page)

¹ This is an obscure feature inherited from SGML. It is usually not supported by browsers, for reasons detailed above.

² This is for compatibility with server code that generates XHTML for tags such as `
`. It should not be used in new code.

³ XHTML 1.0 is the last XHTML standard that allows to be served as *text/html* for backwards compatibility reasons.

(continued from previous page)

```
<h2>HTML5 is probably the future</h2>
<p>
  There might be some other things around but in terms of
  browser vendor support, HTML5 is hard to beat.
<dl>
  <dt>Key 1
  <dd>Value 1
  <dt>Key 2
  <dd>Value 2
</dl>
</div>
```

3.2.5 New technologies in HTML5

HTML5 adds many new features that make Web applications easier to write and to use.

- The `<audio>` and `<video>` tags provide a way to embed audio and video without complicated add-ons like QuickTime or Flash.
- Semantic elements like `<article>`, `<header>`, `<nav>`, and `<time>` that make content easier to understand.
- The `<canvas>` tag, which supports a powerful drawing API, reducing the need for server-generated images to present data graphically.
- New form control types like `<input type="date">` that allow user agents to make entering and validating values easier.
- Advanced JavaScript APIs like Web Storage, Web Workers, Web Sockets, geolocation, and offline applications.

Many other features have been added, as well. A good guide to new features in HTML5 is Mark Pilgrim's book, [Dive Into HTML5](#). Not all of them are supported in browsers yet, however, so use caution.

3.2.6 What should be used?

Currently, the answer is HTML5. There are very few reasons to use XHTML considering the latest developments in Web browsers. To summarize the reasons given above:

- Internet Explorer has poor support for XHTML.
- Many JavaScript libraries also do not support XHTML, due to the more complicated namespacing API it requires.
- HTML5 adds several new features, including semantic tags and the long-awaited `<audio>` and `<video>` tags.
- It has the support of most browser vendors behind it.
- It is much easier to write, and more compact.

For most applications, it is undoubtedly better to use HTML5 than XHTML.

3.3 Security Considerations

Web applications usually face all kinds of security problems and it's very hard to get everything right. Flask tries to solve a few of these things for you, but there are a couple more you have to take care of yourself.

3.3.1 Cross-Site Scripting (XSS)

Cross site scripting is the concept of injecting arbitrary HTML (and with it JavaScript) into the context of a website. To remedy this, developers have to properly escape text so that it cannot include arbitrary HTML tags. For more information on that have a look at the Wikipedia article on [Cross-Site Scripting](#).

Flask configures Jinja2 to automatically escape all values unless explicitly told otherwise. This should rule out all XSS problems caused in templates, but there are still other places where you have to be careful:

- generating HTML without the help of Jinja2
- calling *Markup* on data submitted by users
- sending out HTML from uploaded files, never do that, use the `Content-Disposition: attachment` header to prevent that problem.
- sending out textfiles from uploaded files. Some browsers are using content-type guessing based on the first few bytes so users could trick a browser to execute HTML.

Another thing that is very important are unquoted attributes. While Jinja2 can protect you from XSS issues by escaping HTML, there is one thing it cannot protect you from: XSS by attribute injection. To counter this possible attack vector, be sure to always quote your attributes with either double or single quotes when using Jinja expressions in them:

```
<input value="{{ value }}">
```

Why is this necessary? Because if you would not be doing that, an attacker could easily inject custom JavaScript handlers. For example an attacker could inject this piece of HTML+JavaScript:

```
onmouseover=alert(document.cookie)
```

When the user would then move with the mouse over the input, the cookie would be presented to the user in an alert window. But instead of showing the cookie to the user, a good attacker might also execute any other JavaScript code. In combination with CSS injections the attacker might even make the element fill out the entire page so that the user would just have to have the mouse anywhere on the page to trigger the attack.

There is one class of XSS issues that Jinja's escaping does not protect against. The `a` tag's `href` attribute can contain a *javascript*: URI, which the browser will execute when clicked if not secured properly.

```
<a href="{{ value }}">click here</a>
<a href="javascript:alert('unsafe');">click here</a>
```

To prevent this, you'll need to set the *Content Security Policy (CSP)* response header.

3.3.2 Cross-Site Request Forgery (CSRF)

Another big problem is CSRF. This is a very complex topic and I won't outline it here in detail just mention what it is and how to theoretically prevent it.

If your authentication information is stored in cookies, you have implicit state management. The state of "being logged in" is controlled by a cookie, and that cookie is sent with each request to a page. Unfortunately that includes requests triggered by 3rd party sites. If you don't keep that in mind, some people might be able to trick your application's users with social engineering to do stupid things without them knowing.

Say you have a specific URL that, when you sent POST requests to will delete a user's profile (say `http://example.com/user/delete`). If an attacker now creates a page that sends a post request to that page with some JavaScript they just have to trick some users to load that page and their profiles will end up being deleted.

Imagine you were to run Facebook with millions of concurrent users and someone would send out links to images of little kittens. When users would go to that page, their profiles would get deleted while they are looking at images of fluffy cats.

How can you prevent that? Basically for each request that modifies content on the server you would have to either use a one-time token and store that in the cookie **and** also transmit it with the form data. After receiving the data on the server again, you would then have to compare the two tokens and ensure they are equal.

Why does Flask not do that for you? The ideal place for this to happen is the form validation framework, which does not exist in Flask.

3.3.3 JSON Security

In Flask 0.10 and lower, `jsonify()` did not serialize top-level arrays to JSON. This was because of a security vulnerability in ECMAScript 4.

ECMAScript 5 closed this vulnerability, so only extremely old browsers are still vulnerable. All of these browsers have [other more serious vulnerabilities](#), so this behavior was changed and `jsonify()` now supports serializing arrays.

3.3.4 Security Headers

Browsers recognize various response headers in order to control security. We recommend reviewing each of the headers below for use in your application. The [Flask-Talisman](#) extension can be used to manage HTTPS and the security headers for you.

HTTP Strict Transport Security (HSTS)

Tells the browser to convert all HTTP requests to HTTPS, preventing man-in-the-middle (MITM) attacks.

```
response.headers['Strict-Transport-Security'] = 'max-age=31536000; includeSubDomains'
```

- <https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/Strict-Transport-Security>

Content Security Policy (CSP)

Tell the browser where it can load various types of resource from. This header should be used whenever possible, but requires some work to define the correct policy for your site. A very strict policy would be:

```
response.headers['Content-Security-Policy'] = "default-src 'self'"
```

- <https://csp.withgoogle.com/docs/index.html>
- <https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/Content-Security-Policy>

X-Content-Type-Options

Forces the browser to honor the response content type instead of trying to detect it, which can be abused to generate a cross-site scripting (XSS) attack.

```
response.headers['X-Content-Type-Options'] = 'nosniff'
```

- <https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/X-Content-Type-Options>

X-Frame-Options

Prevents external sites from embedding your site in an `iframe`. This prevents a class of attacks where clicks in the outer frame can be translated invisibly to clicks on your page's elements. This is also known as "clickjacking".

```
response.headers['X-Frame-Options'] = 'SAMEORIGIN'
```

- <https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/X-Frame-Options>

X-XSS-Protection

The browser will try to prevent reflected XSS attacks by not loading the page if the request contains something that looks like JavaScript and the response contains the same data.

```
response.headers['X-XSS-Protection'] = '1; mode=block'
```

- <https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/X-XSS-Protection>

Set-Cookie options

These options can be added to a `Set-Cookie` header to improve their security. Flask has configuration options to set these on the session cookie. They can be set on other cookies too.

- `Secure` limits cookies to HTTPS traffic only.
- `HttpOnly` protects the contents of cookies from being read with JavaScript.
- `SameSite` restricts how cookies are sent with requests from external sites. Can be set to `'Lax'` (recommended) or `'Strict'`. `Lax` prevents sending cookies with CSRF-prone requests from external sites, such as submitting a form. `Strict` prevents sending cookies with all external requests, including following regular links.

```
app.config.update(
    SESSION_COOKIE_SECURE=True,
    SESSION_COOKIE_HTTPONLY=True,
    SESSION_COOKIE_SAMESITE='Lax',
)

response.set_cookie('username', 'flask', secure=True, httponly=True, samesite='Lax')
```

Specifying `Expires` or `Max-Age` options, will remove the cookie after the given time, or the current time plus the age, respectively. If neither option is set, the cookie will be removed when the browser is closed.

```
# cookie expires after 10 minutes
response.set_cookie('snakes', '3', max_age=600)
```

For the session cookie, if `session.permanent` is set, then `PERMANENT_SESSION_LIFETIME` is used to set the expiration. Flask's default cookie implementation validates that the cryptographic signature is not older than this value. Lowering this value may help mitigate replay attacks, where intercepted cookies can be sent at a later time.

```
app.config.update(
    PERMANENT_SESSION_LIFETIME=600
)

@app.route('/login', methods=['POST'])
def login():
    ...
    session.clear()
    session['user_id'] = user.id
    session.permanent = True
    ...
```

Use `itsdangerous.TimedSerializer` to sign and validate other cookie values (or any values that need secure signatures).

- <https://developer.mozilla.org/en-US/docs/Web/HTTP/Cookies>
- <https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/Set-Cookie>

HTTP Public Key Pinning (HPKP)

This tells the browser to authenticate with the server using only the specific certificate key to prevent MITM attacks.

Warning: Be careful when enabling this, as it is very difficult to undo if you set up or upgrade your key incorrectly.

- https://developer.mozilla.org/en-US/docs/Web/HTTP/Public_Key_Pinning

3.3.5 Copy/Paste to Terminal

Hidden characters such as the backspace character (`\b`, `^H`) can cause text to render differently in HTML than how it is interpreted if [pasted into a terminal](#).

For example, `import y\bose\bm\bi\bt\be\b` renders as `import yosemite` in HTML, but the backspaces are applied when pasted into a terminal, and it becomes `import os`.

If you expect users to copy and paste untrusted code from your site, such as from comments posted by users on a technical blog, consider applying extra filtering, such as replacing all `\b` characters.

```
body = body.replace("\b", "")
```

Most modern terminals will warn about and remove hidden characters when pasting, so this isn't strictly necessary. It's also possible to craft dangerous commands in other ways that aren't possible to filter. Depending on your site's use case, it may be good to show a warning about copying code in general.

3.4 Flask Extension Development

Flask, being a microframework, often requires some repetitive steps to get a third party library working. Many such extensions are already available on [PyPI](#).

If you want to create your own Flask extension for something that does not exist yet, this guide to extension development will help you get your extension running in no time and to feel like users would expect your extension to behave.

3.4.1 Anatomy of an Extension

Extensions are all located in a package called `flask_something` where “something” is the name of the library you want to bridge. So for example if you plan to add support for a library named *simplexml* to Flask, you would name your extension’s package `flask_simplexml`.

The name of the actual extension (the human readable name) however would be something like “Flask-SimpleXML”. Make sure to include the name “Flask” somewhere in that name and that you check the capitalization. This is how users can then register dependencies to your extension in their `setup.py` files.

But what do extensions look like themselves? An extension has to ensure that it works with multiple Flask application instances at once. This is a requirement because many people will use patterns like the *Application Factories* pattern to create their application as needed to aid unittests and to support multiple configurations. Because of that it is crucial that your application supports that kind of behavior.

Most importantly the extension must be shipped with a `setup.py` file and registered on PyPI. Also the development checkout link should work so that people can easily install the development version into their virtualenv without having to download the library by hand.

Flask extensions must be licensed under a BSD, MIT or more liberal license in order to be listed in the Flask Extension Registry. Keep in mind that the Flask Extension Registry is a moderated place and libraries will be reviewed upfront if they behave as required.

3.4.2 “Hello Flaskext!”

So let’s get started with creating such a Flask extension. The extension we want to create here will provide very basic support for SQLite3.

First we create the following folder structure:

```
flask-sqlite3/
  flask_sqlite3.py
  LICENSE
  README
```

Here’s the contents of the most important files:

setup.py

The next file that is absolutely required is the `setup.py` file which is used to install your Flask extension. The following contents are something you can work with:

```
"""
Flask-SQLite3
-----

This is the description for that library
"""
from setuptools import setup

setup(
    name='Flask-SQLite3',
    version='1.0',
    url='http://example.com/flask-sqlite3/',
    license='BSD',
    author='Your Name',
    author_email='your-email@example.com',
    description='Very short description',
```

(continues on next page)

```
long_description=__doc__,
py_modules=['flask_sqlite3'],
# if you would be using a package instead use packages instead
# of py_modules:
# packages=['flask_sqlite3'],
zip_safe=False,
include_package_data=True,
platforms='any',
install_requires=[
    'Flask'
],
classifiers=[
    'Environment :: Web Environment',
    'Intended Audience :: Developers',
    'License :: OSI Approved :: BSD License',
    'Operating System :: OS Independent',
    'Programming Language :: Python',
    'Topic :: Internet :: WWW/HTTP :: Dynamic Content',
    'Topic :: Software Development :: Libraries :: Python Modules'
]
)
```

That's a lot of code but you can really just copy/paste that from existing extensions and adapt.

flask_sqlite3.py

Now this is where your extension code goes. But how exactly should such an extension look like? What are the best practices? Continue reading for some insight.

3.4.3 Initializing Extensions

Many extensions will need some kind of initialization step. For example, consider an application that's currently connecting to SQLite like the documentation suggests (*Using SQLite 3 with Flask*). So how does the extension know the name of the application object?

Quite simple: you pass it to it.

There are two recommended ways for an extension to initialize:

initialization functions:

If your extension is called *helloworld* you might have a function called `init_helloworld(app[, extra_args])` that initializes the extension for that application. It could attach before / after handlers etc.

classes:

Classes work mostly like initialization functions but can later be used to further change the behavior.

What to use depends on what you have in mind. For the SQLite 3 extension we will use the class-based approach because it will provide users with an object that handles opening and closing database connections.

When designing your classes, it's important to make them easily reusable at the module level. This means the object itself must not under any circumstances store any application specific state and must be shareable between different applications.

3.4.4 The Extension Code

Here's the contents of the `flask_sqlite3.py` for copy/paste:

```
import sqlite3
from flask import current_app, _app_ctx_stack

class SQLite3(object):
    def __init__(self, app=None):
        self.app = app
        if app is not None:
            self.init_app(app)

    def init_app(self, app):
        app.config.setdefault('SQLITE3_DATABASE', ':memory:')
        app.teardown_appcontext(self.teardown)

    def connect(self):
        return sqlite3.connect(current_app.config['SQLITE3_DATABASE'])

    def teardown(self, exception):
        ctx = _app_ctx_stack.top
        if hasattr(ctx, 'sqlite3_db'):
            ctx.sqlite3_db.close()

    @property
    def connection(self):
        ctx = _app_ctx_stack.top
        if ctx is not None:
            if not hasattr(ctx, 'sqlite3_db'):
                ctx.sqlite3_db = self.connect()
            return ctx.sqlite3_db
```

So here's what these lines of code do:

1. The `__init__` method takes an optional app object and, if supplied, will call `init_app`.
2. The `init_app` method exists so that the `SQLite3` object can be instantiated without requiring an app object. This method supports the factory pattern for creating applications. The `init_app` will set the configuration for the database, defaulting to an in memory database if no configuration is supplied. In addition, the `init_app` method attaches the `teardown` handler.
3. Next, we define a `connect` method that opens a database connection.
4. Finally, we add a `connection` property that on first access opens the database connection and stores it on the context. This is also the recommended way to handling resources: fetch resources lazily the first time they are used.

Note here that we're attaching our database connection to the top application context via `_app_ctx_stack.top`. Extensions should use the top context for storing their own information with a sufficiently complex name.

So why did we decide on a class-based approach here? Because using our extension looks something like this:

```
from flask import Flask
from flask_sqlite3 import SQLite3

app = Flask(__name__)
app.config.from_pyfile('the-config.cfg')
db = SQLite3(app)
```

You can then use the database from views like this:

```
@app.route('/')
def show_all():
    cur = db.connection.cursor()
    cur.execute(...)
```

Likewise if you are outside of a request you can use the database by pushing an app context:

```
with app.app_context():
    cur = db.connection.cursor()
    cur.execute(...)
```

At the end of the `with` block the teardown handles will be executed automatically.

Additionally, the `init_app` method is used to support the factory pattern for creating apps:

```
db = SQLite3()
# Then later on.
app = create_app('the-config.cfg')
db.init_app(app)
```

Keep in mind that supporting this factory pattern for creating apps is required for approved flask extensions (described below).

Note on `init_app`

As you noticed, `init_app` does not assign `app` to `self`. This is intentional! Class based Flask extensions must only store the application on the object when the application was passed to the constructor. This tells the extension: I am not interested in using multiple applications.

When the extension needs to find the current application and it does not have a reference to it, it must either use the `current_app` context local or change the API in a way that you can pass the application explicitly.

3.4.5 Using `_app_ctx_stack`

In the example above, before every request, a `sqlite3_db` variable is assigned to `_app_ctx_stack.top`. In a view function, this variable is accessible using the `connection` property of `SQLite3`. During the teardown of a request, the `sqlite3_db` connection is closed. By using this pattern, the *same* connection to the `sqlite3` database is accessible to anything that needs it for the duration of the request.

3.4.6 Learn from Others

This documentation only touches the bare minimum for extension development. If you want to learn more, it's a very good idea to check out existing extensions on the [PyPI](#). If you feel lost there is still the [mailinglist](#) and the [Discord server](#) to get some ideas for nice looking APIs. Especially if you do something nobody before you did, it might be a very good idea to get some more input. This not only generates useful feedback on what people might want from an extension, but also avoids having multiple developers working in isolation on pretty much the same problem.

Remember: good API design is hard, so introduce your project on the mailing list, and let other developers give you a helping hand with designing the API.

The best Flask extensions are extensions that share common idioms for the API. And this can only work if collaboration happens early.

3.4.7 Approved Extensions

Flask previously had the concept of approved extensions. These came with some vetting of support and compatibility. While this list became too difficult to maintain over time, the guidelines are still relevant to all extensions maintained and developed today, as they help the Flask ecosystem remain consistent and compatible.

0. An approved Flask extension requires a maintainer. In the event an extension author would like to move beyond the project, the project should find a new maintainer and transfer access to the repository, documentation, PyPI, and any other services. If no maintainer is available, give access to the Pallets core team.
1. The naming scheme is *Flask-ExtensionName* or *ExtensionName-Flask*. It must provide exactly one package or module named `flask_extension_name`.
2. The extension must be BSD or MIT licensed. It must be open source and publicly available.
3. The extension's API must have the following characteristics:
 - It must support multiple applications running in the same Python process. Use `current_app` instead of `self.app`, store configuration and state per application instance.
 - It must be possible to use the factory pattern for creating applications. Use the `ext.init_app()` pattern.
4. From a clone of the repository, an extension with its dependencies must be installable with `pip install -e ..`
5. It must ship a testing suite that can be invoked with `tox -e py` or `pytest`. If not using `tox`, the test dependencies should be specified in a `requirements.txt` file. The tests must be part of the sdist distribution.
6. The documentation must use the `flask` theme from the [Official Pallets Themes](#). A link to the documentation or project website must be in the PyPI metadata or the `readme`.
7. For maximum compatibility, the extension should support the same versions of Python that Flask supports. 3.6+ is recommended as of 2020. Use `python_requires=">= 3.6"` in `setup.py` to indicate supported versions.

3.5 How to contribute to Flask

Thank you for considering contributing to Flask!

3.5.1 Support questions

Please don't use the issue tracker for this. The issue tracker is a tool to address bugs and feature requests in Flask itself. Use one of the following resources for questions about using Flask or issues with your own code:

- The `#questions` channel on our Discord chat: <https://discord.gg/pallets>
- The mailing list flask@python.org for long term discussion or larger issues.
- Ask on [Stack Overflow](#). Search with Google first using: `site:stackoverflow.com flask {search term, exception message, etc.}`
- Ask on our [GitHub Discussions](#).

3.5.2 Reporting issues

Include the following information in your post:

- Describe what you expected to happen.
- If possible, include a [minimal reproducible example](#) to help us identify the issue. This also helps check that the issue is not with your own code.
- Describe what actually happened. Include the full traceback if there was an exception.
- List your Python and Flask versions. If possible, check if this issue is already fixed in the latest releases or the latest code in the repository.

3.5.3 Submitting patches

If there is not an open issue for what you want to submit, prefer opening one for discussion before working on a PR. You can work on any issue that doesn't have an open PR linked to it or a maintainer assigned to it. These show up in the sidebar. No need to ask if you can work on an issue that interests you.

Include the following in your patch:

- Use [Black](#) to format your code. This and other tools will run automatically if you install [pre-commit](#) using the instructions below.
- Include tests if your patch adds or changes code. Make sure the test fails without your patch.
- Update any relevant docs pages and docstrings. Docs pages and docstrings should be wrapped at 72 characters.
- Add an entry in `CHANGES.rst`. Use the same style as other entries. Also include `.. versionchanged::` inline changelogs in relevant docstrings.

First time setup

- Download and install the [latest version of git](#).
- Configure git with your [username](#) and [email](#).

```
$ git config --global user.name 'your name'
$ git config --global user.email 'your email'
```

- Make sure you have a [GitHub account](#).
- Fork Flask to your GitHub account by clicking the [Fork](#) button.
- [Clone](#) the main repository locally.

```
$ git clone https://github.com/pallets/flask
$ cd flask
```

- Add your fork as a remote to push your work to. Replace `{username}` with your username. This names the remote “fork”, the default Pallets remote is “origin”.

```
$ git remote add fork https://github.com/{username}/flask
```

- Create a [virtualenv](#).

Linux/macOS

Windows

```
$ python3 -m venv env
$ . env/bin/activate
```

```
> py -3 -m venv env
> env\Scripts\activate
```

- Upgrade pip and setuptools.

```
$ python -m pip install --upgrade pip setuptools
```

- Install the development dependencies, then install Flask in editable mode.

```
$ pip install -r requirements/dev.txt && pip install -e .
```

- Install the pre-commit hooks.

```
$ pre-commit install
```

Start coding

- Create a branch to identify the issue you would like to work on. If you're submitting a bug or documentation fix, branch off of the latest ".x" branch.

```
$ git fetch origin
$ git checkout -b your-branch-name origin/2.0.x
```

If you're submitting a feature addition or change, branch off of the "main" branch.

```
$ git fetch origin
$ git checkout -b your-branch-name origin/main
```

- Using your favorite editor, make your changes, [committing as you go](#).
- Include tests that cover any code changes you make. Make sure the test fails without your patch. Run the tests as described below.
- Push your commits to your fork on GitHub and [create a pull request](#). Link to the issue being addressed with `fixes #123` in the pull request.

```
$ git push --set-upstream fork your-branch-name
```

Running the tests

Run the basic test suite with pytest.

```
$ pytest
```

This runs the tests for the current environment, which is usually sufficient. CI will run the full suite when you submit your pull request. You can run the full test suite with tox if you don't want to wait.

```
$ tox
```

Running test coverage

Generating a report of lines that do not have test coverage can indicate where to start contributing. Run `pytest` using `coverage` and generate a report.

```
$ pip install coverage
$ coverage run -m pytest
$ coverage html
```

Open `htmlcov/index.html` in your browser to explore the report.

Read more about [coverage](#).

Building the docs

Build the docs in the `docs` directory using `Sphinx`.

```
$ cd docs
$ make html
```

Open `_build/html/index.html` in your browser to view the docs.

Read more about [Sphinx](#).

3.6 License

3.6.1 BSD-3-Clause Source License

The BSD-3-Clause license applies to all files in the Flask repository and source distribution. This includes Flask's source code, the examples, and tests, as well as the documentation.

Copyright 2010 Pallets

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

3.6.2 Artwork License

This license applies to Flask's logo.

Copyright 2010 Pallets

This logo or a modified version may be used by anyone to refer to the Flask project, but does not indicate endorsement by the project.

Redistribution and use in source (SVG) and binary (renders in PNG, etc.) forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice and this list of conditions.
2. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

We would appreciate that you make the image a link to <https://palletsprojects.com/p/flask/> if you use it in a medium that supports links.

3.7 Changes

3.7.1 Version 2.1.0

Unreleased

- Update Click dependency to `>= 8.0`.

3.7.2 Version 2.0.2

Released 2021-10-04

- Fix type annotation for `teardown_*` methods. [#4093](#)
- Fix type annotation for `before_request` and `before_app_request` decorators. [#4104](#)
- Fixed the issue where typing requires template global decorators to accept functions with no arguments. [#4098](#)
- Support View and MethodView instances with async handlers. [#4112](#)
- Enhance typing of `app.errorhandler` decorator. [#4095](#)
- Fix registering a blueprint twice with differing names. [#4124](#)
- Fix the type of `static_folder` to accept `pathlib.Path`. [#4150](#)
- `jsonify` handles `decimal.Decimal` by encoding to `str`. [#4157](#)
- Correctly handle raising deferred errors in CLI lazy loading. [#4096](#)
- The CLI loader handles `**kwargs` in a `create_app` function. [#4170](#)
- Fix the order of `before_request` and other callbacks that trigger before the view returns. They are called from the app down to the closest nested blueprint. [#4229](#)

3.7.3 Version 2.0.1

Released 2021-05-21

- Re-add the `filename` parameter in `send_from_directory`. The `filename` parameter has been renamed to `path`, the old name is deprecated. [#4019](#)
- Mark top-level names as exported so type checking understands imports in user projects. [#4024](#)
- Fix type annotation for `g` and inform mypy that it is a namespace object that has arbitrary attributes. [#4020](#)
- Fix some types that weren't available in Python 3.6.0. [#4040](#)
- Improve typing for `send_file`, `send_from_directory`, and `get_send_file_max_age`. [#4044](#), [#4026](#)
- Show an error when a blueprint name contains a dot. The `.` has special meaning, it is used to separate (nested) blueprint names and the endpoint name. [#4041](#)
- Combine URL prefixes when nesting blueprints that were created with a `url_prefix` value. [#4037](#)
- Roll back a change to the order that URL matching was done. The URL is again matched after the session is loaded, so the session is available in custom URL converters. [#4053](#)
- Re-add deprecated `Config.from_json`, which was accidentally removed early. [#4078](#)
- Improve typing for some functions using `Callable` in their type signatures, focusing on decorator factories. [#4060](#)
- Nested blueprints are registered with their dotted name. This allows different blueprints with the same name to be nested at different locations. [#4069](#)
- `register_blueprint` takes a `name` option to change the (pre-dotted) name the blueprint is registered with. This allows the same blueprint to be registered multiple times with unique names for `url_for`. Registering the same blueprint with the same name multiple times is deprecated. [#1091](#)
- Improve typing for `stream_with_context`. [#4052](#)

3.7.4 Version 2.0.0

Released 2021-05-11

- Drop support for Python 2 and 3.5.
- Bump minimum versions of other Pallets projects: Werkzeug ≥ 2 , Jinja2 ≥ 3 , MarkupSafe ≥ 2 , ItsDangerous ≥ 2 , Click ≥ 8 . Be sure to check the change logs for each project. For better compatibility with other applications (e.g. Celery) that still require Click 7, there is no hard dependency on Click 8 yet, but using Click 7 will trigger a `DeprecationWarning` and Flask 2.1 will depend on Click 8.
- JSON support no longer uses `simplejson`. To use another JSON module, override `app.json_encoder` and `json_decoder`. [#3555](#)
- The `encoding` option to JSON functions is deprecated. [#3562](#)
- Passing `script_info` to app factory functions is deprecated. This was not portable outside the `flask` command. Use `click.get_current_context().obj` if it's needed. [#3552](#)
- The CLI shows better error messages when the app failed to load when looking up commands. [#2741](#)
- Add `sessions.SessionInterface.get_cookie_name()` to allow setting the session cookie name dynamically. [#3369](#)
- Add `Config.from_file()` to load config using arbitrary file loaders, such as `toml.load` or `json.load`. `Config.from_json()` is deprecated in favor of this. [#3398](#)
- The `flask run` command will only defer errors on reload. Errors present during the initial call will cause the server to exit with the traceback immediately. [#3431](#)
- `send_file()` raises a `ValueError` when passed an `io` object in text mode. Previously, it would respond with 200 OK and an empty file. [#3358](#)

- When using ad-hoc certificates, check for the cryptography library instead of PyOpenSSL. #3492
- When specifying a factory function with `FLASK_APP`, keyword argument can be passed. #3553
- When loading a `.env` or `.flaskenv` file, the current working directory is no longer changed to the location of the file. #3560
- When returning a `(response, headers)` tuple from a view, the headers replace rather than extend existing headers on the response. For example, this allows setting the `Content-Type` for `jsonify()`. Use `response.headers.extend()` if extending is desired. #3628
- The `Scaffold` class provides a common API for the `Flask` and `Blueprint` classes. `Blueprint` information is stored in attributes just like `Flask`, rather than opaque lambda functions. This is intended to improve consistency and maintainability. #3215
- Include `samesite` and `secure` options when removing the session cookie. #3726
- Support passing a `pathlib.Path` to `static_folder`. #3579
- `send_file` and `send_from_directory` are wrappers around the implementations in `werkzeug.utils`. #3828
- Some `send_file` parameters have been renamed, the old names are deprecated. `attachment_filename` is renamed to `download_name`. `cache_timeout` is renamed to `max_age`. `add_etags` is renamed to `etag`. #3828#3883
- `send_file` passes `download_name` even if `as_attachment=False` by using `Content-Disposition: inline`. #3828
- `send_file` sets `conditional=True` and `max_age=None` by default. `Cache-Control` is set to `no-cache` if `max_age` is not set, otherwise `public`. This tells browsers to validate conditional requests instead of using a timed cache. #3828
- `helpers.safe_join` is deprecated. Use `werkzeug.utils.safe_join` instead. #3828
- The request context does route matching before opening the session. This could allow a session interface to change behavior based on `request.endpoint`. #3776
- Use Jinja's implementation of the `|tojson` filter. #3881
- Add route decorators for common HTTP methods. For example, `@app.post("/login")` is a shortcut for `@app.route("/login", methods=["POST"])`. #3907
- Support async views, error handlers, before and after request, and teardown functions. #3412
- Support nesting blueprints. #593#1548, #3923
- Set the default encoding to "UTF-8" when loading `.env` and `.flaskenv` files to allow to use non-ASCII characters. #3931
- `flask shell` sets up tab and history completion like the default python shell if `readline` is installed. #3941
- `helpers.total_seconds()` is deprecated. Use `timedelta.total_seconds()` instead. #3962
- Add type hinting. #3973.

3.7.5 Version 1.1.4

Released 2021-05-13

- Update `static_folder` to use `_compat.fspath` instead of `os.fspath` to continue supporting Python < 3.6 [#4050](#)

3.7.6 Version 1.1.3

Released 2021-05-13

- Set maximum versions of Werkzeug, Jinja, Click, and ItsDangerous. [#4043](#)
- Re-add support for passing a `pathlib.Path` for `static_folder`. [#3579](#)

3.7.7 Version 1.1.2

Released 2020-04-03

- Work around an issue when running the `flask` command with an external debugger on Windows. [#3297](#)
- The static route will not catch all URLs if the Flask `static_folder` argument ends with a slash. [#3452](#)

3.7.8 Version 1.1.1

Released 2019-07-08

- The `flask.json_available` flag was added back for compatibility with some extensions. It will raise a deprecation warning when used, and will be removed in version 2.0.0. [#3288](#)

3.7.9 Version 1.1.0

Released 2019-07-04

- Bump minimum Werkzeug version to `>= 0.15`.
- Drop support for Python 3.4.
- Error handlers for `InternalServerError` or `500` will always be passed an instance of `InternalServerError`. If they are invoked due to an unhandled exception, that original exception is now available as `e.original_exception` rather than being passed directly to the handler. The same is true if the handler is for the base `HTTPException`. This makes error handler behavior more consistent. [#3266](#)
 - `Flask.finalize_request()` is called for all unhandled exceptions even if there is no `500` error handler.
- `Flask.logger` takes the same name as `Flask.name` (the value passed as `Flask(import_name)`). This reverts 1.0's behavior of always logging to `"flask.app"`, in order to support multiple apps in the same process. A warning will be shown if old configuration is detected that needs to be moved. [#2866](#)
- `flask.RequestContext.copy()` includes the current session object in the request context copy. This prevents session pointing to an out-of-date object. [#2935](#)
- Using built-in `RequestContext`, unprintable Unicode characters in Host header will result in a HTTP 400 response and not HTTP 500 as previously. [#2994](#)
- `send_file()` supports `PathLike` objects as described in PEP 0519, to support `pathlib` in Python 3. [#3059](#)
- `send_file()` supports `BytesIO` partial content. [#2957](#)
- `open_resource()` accepts the `"rt"` file mode. This still does the same thing as `"r"`. [#3163](#)

- The `MethodView.methods` attribute set in a base class is used by subclasses. #3138
- `Flask.jinja_options` is a dict instead of an `ImmutableDict` to allow easier configuration. Changes must still be made before creating the environment. #3190
- Flask's `JSONMixin` for the request and response wrappers was moved into Werkzeug. Use Werkzeug's version with Flask-specific support. This bumps the Werkzeug dependency to `>= 0.15`. #3125
- The `flask` command entry point is simplified to take advantage of Werkzeug 0.15's better reloader support. This bumps the Werkzeug dependency to `>= 0.15`. #3022
- Support `static_url_path` that ends with a forward slash. #3134
- Support empty `static_folder` without requiring setting an empty `static_url_path` as well. #3124
- `jsonify()` supports `dataclasses.dataclass` objects. #3195
- Allow customizing the `Flask.url_map_class` used for routing. #3069
- The development server port can be set to 0, which tells the OS to pick an available port. #2926
- The return value from `cli.load_dotenv()` is more consistent with the documentation. It will return `False` if `python-dotenv` is not installed, or if the given path isn't a file. #2937
- Signaling support has a stub for the `connect_via` method when the Blinker library is not installed. #3208
- Add an `--extra-files` option to the `flask run` CLI command to specify extra files that will trigger the reloader on change. #2897
- Allow returning a dictionary from a view function. Similar to how returning a string will produce a `text/html` response, returning a dict will call `jsonify` to produce a `application/json` response. #3111
- Blueprints have a `cli` Click group like `app.cli`. CLI commands registered with a blueprint will be available as a group under the `flask` command. #1357.
- When using the test client as a context manager (`with client:`), all preserved request contexts are popped when the block exits, ensuring nested contexts are cleaned up correctly. #3157
- Show a better error message when the view return type is not supported. #3214
- `flask.testing.make_test_envIRON_builder()` has been deprecated in favour of a new class `flask.testing.EnvIRON_builder`. #3232
- The `flask run` command no longer fails if Python is not built with SSL support. Using the `--cert` option will show an appropriate error message. #3211
- URL matching now occurs after the request context is pushed, rather than when it's created. This allows custom URL converters to access the app and request contexts, such as to query a database for an id. #3088

3.7.10 Version 1.0.4

Released 2019-07-04

- The key information for `BadRequestKeyError` is no longer cleared outside debug mode, so error handlers can still access it. This requires upgrading to Werkzeug 0.15.5. #3249
- `send_file` url quotes the `“:”` and `“/”` characters for more compatible UTF-8 filename support in some browsers. #3074
- Fixes for PEP451 import loaders and `pytest 5.x`. #3275
- Show message about `dotenv` on `stderr` instead of `stdout`. #3285

3.7.11 Version 1.0.3

Released 2019-05-17

- `send_file()` encodes filenames as ASCII instead of Latin-1 (ISO-8859-1). This fixes compatibility with Unicorn, which is stricter about header encodings than PEP 3333. #2766
- Allow custom CLIs using `FlaskGroup` to set the debug flag without it always being overwritten based on environment variables. #2765
- `flask --version` outputs Werkzeug's version and simplifies the Python version. #2825
- `send_file()` handles an `attachment_filename` that is a native Python 2 string (bytes) with UTF-8 coded bytes. #2933
- A catch-all error handler registered for `HTTPException` will not handle `RoutingException`, which is used internally during routing. This fixes the unexpected behavior that had been introduced in 1.0. #2986
- Passing the `json` argument to `app.test_client` does not push/pop an extra app context. #2900

3.7.12 Version 1.0.2

Released 2018-05-02

- Fix more backwards compatibility issues with merging slashes between a blueprint prefix and route. #2748
- Fix error with `flask routes` command when there are no routes. #2751

3.7.13 Version 1.0.1

Released 2018-04-29

- Fix registering partials (with no `__name__`) as view functions. #2730
- Don't treat lists returned from view functions the same as tuples. Only tuples are interpreted as response data. #2736
- Extra slashes between a blueprint's `url_prefix` and a route URL are merged. This fixes some backwards compatibility issues with the change in 1.0. #2731, #2742
- Only trap `BadRequestKeyError` errors in debug mode, not all `BadRequest` errors. This allows `abort(400)` to continue working as expected. #2735
- The `FLASK_SKIP_DOTENV` environment variable can be set to 1 to skip automatically loading `dotenv` files. #2722

3.7.14 Version 1.0

Released 2018-04-26

- Python 2.6 and 3.3 are no longer supported.
- Bump minimum dependency versions to the latest stable versions: Werkzeug \geq 0.14, Jinja \geq 2.10, itsdangerous \geq 0.24, Click \geq 5.1. #2586
- Skip `app.run` when a Flask application is run from the command line. This avoids some behavior that was confusing to debug.
- Change the default for `JSONIFY_PRETTYPRINT_REGULAR` to `False`. `jsonify()` returns a compact format by default, and an indented format in debug mode. #2193
- `Flask.__init__` accepts the `host_matching` argument and sets it on `url_map`. #1559
- `Flask.__init__` accepts the `static_host` argument and passes it as the `host` argument when defining the static route. #1559

- `send_file()` supports Unicode in `attachment_filename`. #2223
- Pass `_scheme` argument from `url_for()` to `handle_url_build_error()`. #2017
- `add_url_rule()` accepts the `provide_automatic_options` argument to disable adding the `OPTIONS` method. #1489
- `MethodView` subclasses inherit method handlers from base classes. #1936
- Errors caused while opening the session at the beginning of the request are handled by the app's error handlers. #2254
- Blueprints gained `json_encoder` and `json_decoder` attributes to override the app's encoder and decoder. #1898
- `Flask.make_response()` raises `TypeError` instead of `ValueError` for bad response types. The error messages have been improved to describe why the type is invalid. #2256
- Add `routes` CLI command to output routes registered on the application. #2259
- Show warning when session cookie domain is a bare hostname or an IP address, as these may not behave properly in some browsers, such as Chrome. #2282
- Allow IP address as exact session cookie domain. #2282
- `SESSION_COOKIE_DOMAIN` is set if it is detected through `SERVER_NAME`. #2282
- Auto-detect zero-argument app factory called `create_app` or `make_app` from `FLASK_APP`. #2297
- Factory functions are not required to take a `script_info` parameter to work with the `flask` command. If they take a single parameter or a parameter named `script_info`, the `ScriptInfo` object will be passed. #2319
- `FLASK_APP` can be set to an app factory, with arguments if needed, for example `FLASK_APP=myproject.app:create_app('dev')`. #2326
- `FLASK_APP` can point to local packages that are not installed in editable mode, although `pip install -e` is still preferred. #2414
- The `View` class attribute `provide_automatic_options` is set in `as_view()`, to be detected by `add_url_rule()`. #2316
- Error handling will try handlers registered for `blueprint`, `code`, `app`, `code, blueprint`, `exception`, `app, exception`. #2314
- Cookie is added to the response's `Vary` header if the session is accessed at all during the request (and not deleted). #2288
- `test_request_context()` accepts `subdomain` and `url_scheme` arguments for use when building the base URL. #1621
- Set `APPLICATION_ROOT` to `'/'` by default. This was already the implicit default when it was set to `None`.
- `TRAP_BAD_REQUEST_ERRORS` is enabled by default in debug mode. `BadRequestKeyError` has a message with the bad key in debug mode instead of the generic bad request message. #2348
- Allow registering new tags with `TaggedJSONSerializer` to support storing other types in the session cookie. #2352
- Only open the session if the request has not been pushed onto the context stack yet. This allows `stream_with_context()` generators to access the same session that the containing view uses. #2354
- Add `json` keyword argument for the test client request methods. This will dump the given object as JSON and set the appropriate content type. #2358
- Extract JSON handling to a mixin applied to both the `Request` and `Response` classes. This adds the `is_json()` and `get_json()` methods to the response to make testing JSON response much easier. #2358
- Removed error handler caching because it caused unexpected results for some exception inheritance hierarchies. Register handlers explicitly for each exception if you want to avoid traversing the MRO. #2362

- Fix incorrect JSON encoding of aware, non-UTC datetimes. #2374
- Template auto reloading will honor debug mode even even if `jinjia_env` was already accessed. #2373
- The following old deprecated code was removed. #2385
 - `flask.ext` - import extensions directly by their name instead of through the `flask.ext` namespace. For example, `import flask.ext.sqlalchemy` becomes `import flask_sqlalchemy`.
 - `Flask.init_jinja_globals` - extend `Flask.create_jinja_environment()` instead.
 - `Flask.error_handlers` - tracked by `Flask.error_handler_spec`, use `Flask.errorhandler()` to register handlers.
 - `Flask.request_globals_class` - use `Flask.app_ctx_globals_class` instead.
 - `Flask.static_path` - use `Flask.static_url_path` instead.
 - `Request.module` - use `Request.blueprint` instead.
- The `Request.json` property is no longer deprecated. #1421
- Support passing a `EnvironBuilder` or dict to `test_client.open`. #2412
- The `flask` command and `Flask.run()` will load environment variables from `.env` and `.flaskenv` files if `python-dotenv` is installed. #2416
- When passing a full URL to the test client, the scheme in the URL is used instead of `PREFERRED_URL_SCHEME`. #2430
- `Flask.logger` has been simplified. `LOGGER_NAME` and `LOGGER_HANDLER_POLICY` config was removed. The logger is always named `flask.app`. The level is only set on first access, it doesn't check `Flask.debug` each time. Only one format is used, not different ones depending on `Flask.debug`. No handlers are removed, and a handler is only added if no handlers are already configured. #2436
- Blueprint view function names may not contain dots. #2450
- Fix a `ValueError` caused by invalid Range requests in some cases. #2526
- The development server uses threads by default. #2529
- Loading config files with `silent=True` will ignore `ENOTDIR` errors. #2581
- Pass `--cert` and `--key` options to `flask run` to run the development server over HTTPS. #2606
- Added `SESSION_COOKIE_SAMESITE` to control the SameSite attribute on the session cookie. #2607
- Added `test_cli_runner()` to create a Click runner that can invoke Flask CLI commands for testing. #2636
- Subdomain matching is disabled by default and setting `SERVER_NAME` does not implicitly enable it. It can be enabled by passing `subdomain_matching=True` to the Flask constructor. #2635
- A single trailing slash is stripped from the blueprint `url_prefix` when it is registered with the app. #2629
- `Request.get_json()` doesn't cache the result if parsing fails when `silent` is true. #2651
- `Request.get_json()` no longer accepts arbitrary encodings. Incoming JSON should be encoded using UTF-8 per [RFC 8259](#), but Flask will autodetect UTF-8, -16, or -32. #2691
- Added `MAX_COOKIE_SIZE` and `Response.max_cookie_size` to control when Werkzeug warns about large cookies that browsers may ignore. #2693
- Updated documentation theme to make docs look better in small windows. #2709
- Rewrote the tutorial docs and example project to take a more structured approach to help new users avoid common pitfalls. #2676

3.7.15 Version 0.12.5

Released 2020-02-10

- Pin Werkzeug to < 1.0.0. [#3497](#)

3.7.16 Version 0.12.4

Released 2018-04-29

- Repackage 0.12.3 to fix package layout issue. [#2728](#)

3.7.17 Version 0.12.3

Released 2018-04-26

- `Request.get_json()` no longer accepts arbitrary encodings. Incoming JSON should be encoded using UTF-8 per [RFC 8259](#), but Flask will autodetect UTF-8, -16, or -32. [#2692](#)
- Fix a Python warning about imports when using `python -m flask`. [#2666](#)
- Fix a `ValueError` caused by invalid Range requests in some cases.

3.7.18 Version 0.12.2

Released 2017-05-16

- Fix a bug in `safe_join` on Windows.

3.7.19 Version 0.12.1

Released 2017-03-31

- Prevent `flask run` from showing a `NoAppException` when an `ImportError` occurs within the imported application module.
- Fix encoding behavior of `app.config.from_pyfile` for Python 3. [#2118](#)
- Use the `SERVER_NAME` config if it is present as default values for `app.run`. [#2109](#), [#2152](#)
- Call `ctx.auto_pop` with the exception object instead of `None`, in the event that a `BaseException` such as `KeyboardInterrupt` is raised in a request handler.

3.7.20 Version 0.12

Released 2016-12-21, codename Punsch

- The cli command now responds to `--version`.
- Mimetype guessing and ETag generation for file-like objects in `send_file` has been removed. [#104](#), [:pr`1849`](#)
- Mimetype guessing in `send_file` now fails loudly and doesn't fall back to `application/octet-stream`. [#1988](#)
- Make `flask.safe_join` able to join multiple paths like `os.path.join` [#1730](#)
- Revert a behavior change that made the dev server crash instead of returning an Internal Server Error. [#2006](#)
- Correctly invoke response handlers for both regular request dispatching as well as error handlers.
- Disable logger propagation by default for the app logger.

- Add support for range requests in `send_file`.
- `app.test_client` includes preset default environment, which can now be directly set, instead of `per_client.get`.
- Fix crash when running under PyPy3. #1814

3.7.21 Version 0.11.1

Released 2016-06-07

- Fixed a bug that prevented `FLASK_APP=foobar/__init__.py` from working. #1872

3.7.22 Version 0.11

Released 2016-05-29, codename Absinthe

- Added support to serializing top-level arrays to `flask.jsonify()`. This introduces a security risk in ancient browsers.
- Added `before_render_template` signal.
- Added `**kwargs` to `flask.Test.test_client()` to support passing additional keyword arguments to the constructor of `flask.Flask.test_client_class`.
- Added `SESSION_REFRESH_EACH_REQUEST` config key that controls the set-cookie behavior. If set to `True` a permanent session will be refreshed each request and get their lifetime extended, if set to `False` it will only be modified if the session actually modifies. Non permanent sessions are not affected by this and will always expire if the browser window closes.
- Made Flask support custom JSON mimetypes for incoming data.
- Added support for returning tuples in the form `(response, headers)` from a view function.
- Added `flask.Config.from_json()`.
- Added `flask.Flask.config_class`.
- Added `flask.Config.get_namespace()`.
- Templates are no longer automatically reloaded outside of debug mode. This can be configured with the new `TEMPLATES_AUTO_RELOAD` config key.
- Added a workaround for a limitation in Python 3.3's namespace loader.
- Added support for explicit root paths when using Python 3.3's namespace packages.
- Added `flask` and the `flask.cli` module to start the local debug server through the click CLI system. This is recommended over the old `flask.run()` method as it works faster and more reliable due to a different design and also replaces `Flask-Script`.
- Error handlers that match specific classes are now checked first, thereby allowing catching exceptions that are subclasses of HTTP exceptions (in `werkzeug.exceptions`). This makes it possible for an extension author to create exceptions that will by default result in the HTTP error of their choosing, but may be caught with a custom error handler if desired.
- Added `flask.Config.from_mapping()`.
- Flask will now log by default even if debug is disabled. The log format is now hardcoded but the default log handling can be disabled through the `LOGGER_HANDLER_POLICY` configuration key.
- Removed deprecated module functionality.
- Added the `EXPLAIN_TEMPLATE_LOADING` config flag which when enabled will instruct Flask to explain how it locates templates. This should help users debug when the wrong templates are loaded.
- Enforce blueprint handling in the order they were registered for template loading.

- Ported test suite to `py.test`.
- Deprecated `request.json` in favour of `request.get_json()`.
- Add “pretty” and “compressed” separators definitions in `jsonify()` method. Reduces JSON response size when `JSONIFY_PRETTYPRINT_REGULAR=False` by removing unnecessary white space included by default after separators.
- JSON responses are now terminated with a newline character, because it is a convention that UNIX text files end with a newline and some clients don’t deal well when this newline is missing. This came up originally as a part of <https://github.com/postmanlabs/httpbin/issues/168>. #1262
- The automatically provided `OPTIONS` method is now correctly disabled if the user registered an overriding rule with the lowercase-version `options`. #1288
- `flask.json.jsonify` now supports the `datetime.date` type. #1326
- Don’t leak exception info of already caught exceptions to context teardown handlers. #1393
- Allow custom Jinja environment subclasses. #1422
- Updated extension dev guidelines.
- `flask.g` now has `pop()` and `setdefault` methods.
- Turn on autoescape for `flask.templating.render_template_string` by default. #1515
- `flask.ext` is now deprecated. #1484
- `send_from_directory` now raises `BadRequest` if the filename is invalid on the server OS. #1763
- Added the `JSONIFY_MIMETYPE` configuration variable. #1728
- Exceptions during teardown handling will no longer leave bad application contexts lingering around.
- Fixed broken `test_appcontext_signals()` test case.
- Raise an `AttributeError` in `flask.helpers.find_package()` with a useful message explaining why it is raised when a PEP 302 import hook is used without an `is_package()` method.
- Fixed an issue causing exceptions raised before entering a request or app context to be passed to teardown handlers.
- Fixed an issue with query parameters getting removed from requests in the test client when absolute URLs were requested.
- Made `@before_first_request` into a decorator as intended.
- Fixed an etags bug when sending a file streams with a name.
- Fixed `send_from_directory` not expanding to the application root path correctly.
- Changed logic of before first request handlers to flip the flag after invoking. This will allow some uses that are potentially dangerous but should probably be permitted.
- Fixed Python 3 bug when a handler from `app.url_build_error_handlers` reraises the `BuildError`.

3.7.23 Version 0.10.1

Released 2013-06-14

- Fixed an issue where `|tojson` was not quoting single quotes which made the filter not work properly in HTML attributes. Now it’s possible to use that filter in single quoted attributes. This should make using that filter with angular.js easier.
- Added support for byte strings back to the session system. This broke compatibility with the common case of people putting binary data for token verification into the session.
- Fixed an issue where registering the same method twice for the same endpoint would trigger an exception incorrectly.

3.7.24 Version 0.10

Released 2013-06-13, codename Limoncello

- Changed default cookie serialization format from pickle to JSON to limit the impact an attacker can do if the secret key leaks.
- Added `template_test` methods in addition to the already existing `template_filter` method family.
- Added `template_global` methods in addition to the already existing `template_filter` method family.
- Set the content-length header for x-sendfile.
- `tojson` filter now does not escape script blocks in HTML5 parsers.
- `tojson` used in templates is now safe by default due. This was allowed due to the different escaping behavior.
- Flask will now raise an error if you attempt to register a new function on an already used endpoint.
- Added wrapper module around `simplejson` and added default serialization of datetime objects. This allows much easier customization of how JSON is handled by Flask or any Flask extension.
- Removed deprecated internal `flask.session` module alias. Use `flask.sessions` instead to get the session module. This is not to be confused with `flask.session` the session proxy.
- Templates can now be rendered without request context. The behavior is slightly different as the `request`, `session` and `g` objects will not be available and blueprint's context processors are not called.
- The config object is now available to the template as a real global and not through a context processor which makes it available even in imported templates by default.
- Added an option to generate non-ascii encoded JSON which should result in less bytes being transmitted over the network. It's disabled by default to not cause confusion with existing libraries that might expect `flask.json.dumps` to return bytes by default.
- `flask.g` is now stored on the app context instead of the request context.
- `flask.g` now gained a `get()` method for not erroring out on non existing items.
- `flask.g` now can be used with the `in` operator to see what's defined and it now is iterable and will yield all attributes stored.
- `flask.Flask.request_globals_class` got renamed to `flask.Flask.app_ctx_globals_class` which is a better name to what it does since 0.10.
- `request`, `session` and `g` are now also added as proxies to the template context which makes them available in imported templates. One has to be very careful with those though because usage outside of macros might cause caching.
- Flask will no longer invoke the wrong error handlers if a proxy exception is passed through.
- Added a workaround for chrome's cookies in localhost not working as intended with domain names.
- Changed logic for picking defaults for cookie values from sessions to work better with Google Chrome.
- Added `message_flashed` signal that simplifies flashing testing.
- Added support for copying of request contexts for better working with greenlets.
- Removed custom JSON HTTP exception subclasses. If you were relying on them you can reintroduce them again yourself trivially. Using them however is strongly discouraged as the interface was flawed.
- Python requirements changed: requiring Python 2.6 or 2.7 now to prepare for Python 3.3 port.
- Changed how the teardown system is informed about exceptions. This is now more reliable in case something handles an exception halfway through the error handling process.
- Request context preservation in debug mode now keeps the exception information around which means that teardown handlers are able to distinguish error from success cases.
- Added the `JSONIFY_PRETTYPRINT_REGULAR` configuration variable.

- Flask now orders JSON keys by default to not trash HTTP caches due to different hash seeds between different workers.
- Added `appcontext_pushed` and `appcontext_popped` signals.
- The builtin `run` method now takes the `SERVER_NAME` into account when picking the default port to run on.
- Added `flask.request.get_json()` as a replacement for the old `flask.request.json` property.

3.7.25 Version 0.9

Released 2012-07-01, codename Campari

- The `flask.Request.on_json_loading_failed()` now returns a JSON formatted response by default.
- The `flask.url_for()` function now can generate anchors to the generated links.
- The `flask.url_for()` function now can also explicitly generate URL rules specific to a given HTTP method.
- Logger now only returns the debug log setting if it was not set explicitly.
- Unregister a circular dependency between the WSGI environment and the request object when shutting down the request. This means that `environ.werkzeug.request` will be `None` after the response was returned to the WSGI server but has the advantage that the garbage collector is not needed on CPython to tear down the request unless the user created circular dependencies themselves.
- Session is now stored after callbacks so that if the session payload is stored in the session you can still modify it in an after request callback.
- The `flask.Flask` class will avoid importing the provided import name if it can (the required first parameter), to benefit tools which build Flask instances programmatically. The Flask class will fall back to using `import` on systems with custom module hooks, e.g. Google App Engine, or when the import name is inside a zip archive (usually a .egg) prior to Python 2.7.
- Blueprints now have a decorator to add custom template filters application wide, `flask.Blueprint.app_template_filter()`.
- The Flask and Blueprint classes now have a non-decorator method for adding custom template filters application wide, `flask.Flask.add_template_filter()` and `flask.Blueprint.add_app_template_filter()`.
- The `flask.get_flashed_messages()` function now allows rendering flashed message categories in separate blocks, through a `category_filter` argument.
- The `flask.Flask.run()` method now accepts `None` for `host` and `port` arguments, using default values when `None`. This allows for calling `run` using configuration values, e.g. `app.run(app.config.get('MYHOST'), app.config.get('MYPORT'))`, with proper behavior whether or not a config file is provided.
- The `flask.render_template()` method now accepts either an iterable of template names or a single template name. Previously, it only accepted a single template name. On an iterable, the first template found is rendered.
- Added `flask.Flask.app_context()` which works very similar to the request context but only provides access to the current application. This also adds support for URL generation without an active request context.
- View functions can now return a tuple with the first instance being an instance of `flask.Response`. This allows for returning `jsonify(error="error msg")`, `400` from a view function.
- `Flask` and `Blueprint` now provide a `get_send_file_max_age()` hook for subclasses to override behavior of serving static files from Flask when using `flask.Flask.send_static_file()` (used for the default static file handler) and `send_file()`. This hook is provided a filename, which for example allows

changing cache controls by file extension. The default max-age for `send_file` and static files can be configured through a new `SEND_FILE_MAX_AGE_DEFAULT` configuration variable, which is used in the default `get_send_file_max_age` implementation.

- Fixed an assumption in sessions implementation which could break message flashing on sessions implementations which use external storage.
- Changed the behavior of tuple return values from functions. They are no longer arguments to the response object, they now have a defined meaning.
- Added `flask.Flask.request_globals_class` to allow a specific class to be used on creation of the `g` instance of each request.
- Added `required_methods` attribute to view functions to force-add methods on registration.
- Added `flask.after_this_request()`.
- Added `flask.stream_with_context()` and the ability to push contexts multiple times without producing unexpected behavior.

3.7.26 Version 0.8.1

Released 2012-07-01

- Fixed an issue with the undocumented `flask.session` module to not work properly on Python 2.5. It should not be used but did cause some problems for package managers.

3.7.27 Version 0.8

Released 2011-09-29, codename Rakija

- Refactored session support into a session interface so that the implementation of the sessions can be changed without having to override the Flask class.
- Empty session cookies are now deleted properly automatically.
- View functions can now opt out of getting the automatic `OPTIONS` implementation.
- HTTP exceptions and Bad Request errors can now be trapped so that they show up normally in the traceback.
- Flask in debug mode is now detecting some common problems and tries to warn you about them.
- Flask in debug mode will now complain with an assertion error if a view was attached after the first request was handled. This gives earlier feedback when users forget to import view code ahead of time.
- Added the ability to register callbacks that are only triggered once at the beginning of the first request. (`Flask.before_first_request()`)
- Malformed JSON data will now trigger a bad request HTTP exception instead of a value error which usually would result in a 500 internal server error if not handled. This is a backwards incompatible change.
- Applications now not only have a root path where the resources and modules are located but also an instance path which is the designated place to drop files that are modified at runtime (uploads etc.). Also this is conceptually only instance depending and outside version control so it's the perfect place to put configuration files etc.
- Added the `APPLICATION_ROOT` configuration variable.
- Implemented `session_transaction()` to easily modify sessions from the test environment.
- Refactored test client internally. The `APPLICATION_ROOT` configuration variable as well as `SERVER_NAME` are now properly used by the test client as defaults.
- Added `flask.views.View.decorators` to support simpler decorating of pluggable (class-based) views.
- Fixed an issue where the test client if used with the “with” statement did not trigger the execution of the teardown handlers.

- Added finer control over the session cookie parameters.
- HEAD requests to a method view now automatically dispatch to the `get` method if no handler was implemented.
- Implemented the virtual `flask.ext` package to import extensions from.
- The context preservation on exceptions is now an integral component of Flask itself and no longer of the test client. This cleaned up some internal logic and lowers the odds of runaway request contexts in unittests.
- Fixed the Jinja2 environment's `list_templates` method not returning the correct names when blueprints or modules were involved.

3.7.28 Version 0.7.2

Released 2011-07-06

- Fixed an issue with URL processors not properly working on blueprints.

3.7.29 Version 0.7.1

Released 2011-06-29

- Added missing future import that broke 2.5 compatibility.
- Fixed an infinite redirect issue with blueprints.

3.7.30 Version 0.7

Released 2011-06-28, codename Grappa

- Added `make_default_options_response()` which can be used by subclasses to alter the default behavior for OPTIONS responses.
- Unbound locals now raise a proper `RuntimeError` instead of an `AttributeError`.
- Mimetype guessing and etag support based on file objects is now deprecated for `flask.send_file()` because it was unreliable. Pass filenames instead or attach your own etags and provide a proper mimetype by hand.
- Static file handling for modules now requires the name of the static folder to be supplied explicitly. The previous autodetection was not reliable and caused issues on Google's App Engine. Until 1.0 the old behavior will continue to work but issue dependency warnings.
- Fixed a problem for Flask to run on jython.
- Added a `PROPAGATE_EXCEPTIONS` configuration variable that can be used to flip the setting of exception propagation which previously was linked to `DEBUG` alone and is now linked to either `DEBUG` or `TESTING`.
- Flask no longer internally depends on rules being added through the `add_url_rule` function and can now also accept regular werkzeug rules added to the url map.
- Added an `endpoint` method to the flask application object which allows one to register a callback to an arbitrary endpoint with a decorator.
- Use Last-Modified for static file sending instead of Date which was incorrectly introduced in 0.6.
- Added `create_jinja_loader` to override the loader creation process.
- Implemented a silent flag for `config.from_pyfile`.
- Added `teardown_request` decorator, for functions that should run at the end of a request regardless of whether an exception occurred. Also the behavior for `after_request` was changed. It's now no longer executed when an exception is raised.

- Implemented `flask.has_request_context()`
- Deprecated `init_jinja_globals`. Override the `create_jinja_environment()` method instead to achieve the same functionality.
- Added `flask.safe_join()`
- The automatic JSON request data unpacking now looks at the `charset_mimetype` parameter.
- Don't modify the session on `flask.get_flashed_messages()` if there are no messages in the session.
- `before_request` handlers are now able to abort requests with errors.
- It is not possible to define user exception handlers. That way you can provide custom error messages from a central hub for certain errors that might occur during request processing (for instance database connection errors, timeouts from remote resources etc.).
- Blueprints can provide blueprint specific error handlers.
- Implemented generic class-based views.

3.7.31 Version 0.6.1

Released 2010-12-31

- Fixed an issue where the default `OPTIONS` response was not exposing all valid methods in the `Allow` header.
- Jinja2 template loading syntax now allows `./` in front of a template load path. Previously this caused issues with module setups.
- Fixed an issue where the subdomain setting for modules was ignored for the static folder.
- Fixed a security problem that allowed clients to download arbitrary files if the host server was a windows based operating system and the client uses backslashes to escape the directory the files were exposed from.

3.7.32 Version 0.6

Released 2010-07-27, codename Whisky

- After request functions are now called in reverse order of registration.
- `OPTIONS` is now automatically implemented by Flask unless the application explicitly adds `'OPTIONS'` as method to the URL rule. In this case no automatic `OPTIONS` handling kicks in.
- Static rules are now even in place if there is no static folder for the module. This was implemented to aid GAE which will remove the static folder if it's part of a mapping in the `.yaml` file.
- The `config` is now available in the templates as `config`.
- Context processors will no longer override values passed directly to the render function.
- Added the ability to limit the incoming request data with the new `MAX_CONTENT_LENGTH` configuration value.
- The endpoint for the `flask.Module.add_url_rule()` method is now optional to be consistent with the function of the same name on the application object.
- Added a `flask.make_response()` function that simplifies creating response object instances in views.
- Added signalling support based on blinker. This feature is currently optional and supposed to be used by extensions and applications. If you want to use it, make sure to have `blinker` installed.
- Refactored the way URL adapters are created. This process is now fully customizable with the `create_url_adapter()` method.
- Modules can now register for a subdomain instead of just an URL prefix. This makes it possible to bind a whole module to a configurable subdomain.

3.7.33 Version 0.5.2

Released 2010-07-15

- Fixed another issue with loading templates from directories when modules were used.

3.7.34 Version 0.5.1

Released 2010-07-06

- Fixes an issue with template loading from directories when modules were used.

3.7.35 Version 0.5

Released 2010-07-06, codename Calvados

- Fixed a bug with subdomains that was caused by the inability to specify the server name. The server name can now be set with the `SERVER_NAME` config key. This key is now also used to set the session cookie cross-subdomain wide.
- Autoescaping is no longer active for all templates. Instead it is only active for `.html`, `.htm`, `.xml` and `.xhtml`. Inside templates this behavior can be changed with the `autoescape` tag.
- Refactored Flask internally. It now consists of more than a single file.
- `flask.send_file()` now emits etags and has the ability to do conditional responses builtin.
- (temporarily) dropped support for zipped applications. This was a rarely used feature and led to some confusing behavior.
- Added support for per-package template and static-file directories.
- Removed support for `create_jinja_loader` which is no longer used in 0.5 due to the improved module support.
- Added a helper function to expose files from any directory.

3.7.36 Version 0.4

Released 2010-06-18, codename Rakia

- Added the ability to register application wide error handlers from modules.
- `after_request()` handlers are now also invoked if the request dies with an exception and an error handling page kicks in.
- Test client has not the ability to preserve the request context for a little longer. This can also be used to trigger custom requests that do not pop the request stack for testing.
- Because the Python standard library caches loggers, the name of the logger is configurable now to better support unittests.
- Added `TESTING` switch that can activate unittesting helpers.
- The logger switches to `DEBUG` mode now if `debug` is enabled.

3.7.37 Version 0.3.1

Released 2010-05-28

- Fixed a error reporting bug with `flask.Config.from_envvar()`
- Removed some unused code from flask
- Release does no longer include development leftover files (.git folder for themes, built documentation in zip and pdf file and some .pyc files)

3.7.38 Version 0.3

Released 2010-05-28, codename Schnaps

- Added support for categories for flashed messages.
- The application now configures a `logging.Handler` and will log request handling exceptions to that logger when not in debug mode. This makes it possible to receive mails on server errors for example.
- Added support for context binding that does not require the use of the with statement for playing in the console.
- The request context is now available within the with statement making it possible to further push the request context or pop it.
- Added support for configurations.

3.7.39 Version 0.2

Released 2010-05-12, codename J?germeister

- Various bugfixes
- Integrated JSON support
- Added `get_template_attribute()` helper function.
- `add_url_rule()` can now also register a view function.
- Refactored internal request dispatching.
- Server listens on 127.0.0.1 by default now to fix issues with chrome.
- Added external URL support.
- Added support for `send_file()`
- Module support and internal request handling refactoring to better support pluggable applications.
- Sessions can be set to be permanent now on a per-session basis.
- Better error reporting on missing secret keys.
- Added support for Google Appengine.

3.7.40 Version 0.1

Released 2010-04-16

- First public preview release.

PYTHON MODULE INDEX

f

`flask`, 175

`flask.json`, 241

`flask.json.tag`, 243

Symbols

`_AppCtxGlobals` (class in *flask.ctx*), 232
`_app_ctx_stack` (in module *flask*), 251
`_request_ctx_stack` (in module *flask*), 251

A

`abort()` (in module *flask*), 235
`accept_charsets` (*flask.Request* property), 210
`accept_encodings` (*flask.Request* property), 210
`accept_languages` (*flask.Request* property), 210
`accept_mimetypes` (*flask.Request* property), 210
`accept_ranges` (*flask.Response* attribute), 217
`access_control_allow_credentials` (*flask.Response* property), 217
`access_control_allow_headers` (*flask.Response* attribute), 217
`access_control_allow_methods` (*flask.Response* attribute), 217
`access_control_allow_origin` (*flask.Response* attribute), 217
`access_control_expose_headers` (*flask.Response* attribute), 217
`access_control_max_age` (*flask.Response* attribute), 217
`access_control_request_headers` (*flask.Request* attribute), 210
`access_control_request_method` (*flask.Request* attribute), 210
`access_route` (*flask.Request* property), 210
`accessed` (*flask.sessions.SecureCookieSession* attribute), 228
`accessed` (*flask.sessions.SessionMixin* attribute), 230
`add_app_template_filter()` (*flask.Blueprint* method), 200
`add_app_template_global()` (*flask.Blueprint* method), 200
`add_app_template_test()` (*flask.Blueprint* method), 200
`add_etag()` (*flask.Response* method), 217
`add_template_filter()` (*flask.Flask* method), 176
`add_template_global()` (*flask.Flask* method), 176
`add_template_test()` (*flask.Flask* method), 177
`add_url_rule()` (*flask.Blueprint* method), 201
`add_url_rule()` (*flask.blueprints.BlueprintSetupState* method), 252
`add_url_rule()` (*flask.Flask* method), 177

`after_app_request()` (*flask.Blueprint* method), 201
`after_request()` (*flask.Blueprint* method), 201
`after_request()` (*flask.Flask* method), 178
`after_request_funcs` (*flask.Blueprint* attribute), 201
`after_request_funcs` (*flask.Flask* attribute), 178
`after_this_request()` (in module *flask*), 236
`age` (*flask.Response* attribute), 218
`allow` (*flask.Response* property), 218
`app` (*flask.blueprints.BlueprintSetupState* attribute), 252
`app_context()` (*flask.Flask* method), 178
`app_context_processor()` (*flask.Blueprint* method), 201
`app_ctx_globals_class` (*flask.Flask* attribute), 178
`app_errorhandler()` (*flask.Blueprint* method), 201
`app_import_path` (*flask.cli.ScriptInfo* attribute), 261
`app_template_filter()` (*flask.Blueprint* method), 201
`app_template_global()` (*flask.Blueprint* method), 202
`app_template_test()` (*flask.Blueprint* method), 202
`app_url_defaults()` (*flask.Blueprint* method), 202
`app_url_value_preprocessor()` (*flask.Blueprint* method), 202
`AppContext` (class in *flask.ctx*), 251
`appcontext_popped` (in module *flask*), 255
`appcontext_pushed` (in module *flask*), 254
`appcontext_tearing_down` (in module *flask*), 254
`AppGroup` (class in *flask.cli*), 260
`application()` (*flask.Request* class method), 210
`APPLICATION_ROOT` (built-in variable), 81
`args` (*flask.Request* property), 210
`as_view()` (*flask.views.View* class method), 256
`async_to_sync()` (*flask.Flask* method), 178
`authorization` (*flask.Request* property), 211
`auto_find_instance_path()` (*flask.Flask* method), 178

B

`base_url` (*flask.Request* property), 211
`before_app_first_request()` (*flask.Blueprint* method), 202
`before_app_request()` (*flask.Blueprint* method), 202
`before_first_request()` (*flask.Flask* method), 178

- before_first_request_funcs (*flask.Flask* attribute), 179
- before_request() (*flask.Blueprint* method), 203
- before_request() (*flask.Flask* method), 179
- before_request_funcs (*flask.Blueprint* attribute), 203
- before_request_funcs (*flask.Flask* attribute), 179
- Blueprint (class in *flask*), 199
- blueprint (*flask.blueprints.BlueprintSetupState* attribute), 252
- blueprint (*flask.Request* property), 211
- blueprints (*flask.Flask* attribute), 179
- blueprints (*flask.Request* property), 211
- BlueprintSetupState (class in *flask.blueprints*), 252
- ## C
- cache_control (*flask.Request* property), 211
- cache_control (*flask.Response* property), 218
- calculate_content_length() (*flask.Response* method), 218
- call_on_close() (*flask.Response* method), 218
- check() (*flask.json.tag.JSONTag* method), 244
- clear() (*flask.sessions.NullSession* method), 229
- cli (*flask.Blueprint* attribute), 203
- cli (*flask.Flask* attribute), 180
- close() (*flask.Request* method), 211
- close() (*flask.Response* method), 218
- command() (*flask.cli.AppGroup* method), 260
- Config (class in *flask*), 246
- config (*flask.Flask* attribute), 180
- config_class (*flask.Flask* attribute), 180
- content_encoding (*flask.Request* attribute), 211
- content_encoding (*flask.Response* attribute), 218
- content_language (*flask.Response* property), 218
- content_length (*flask.Request* property), 211
- content_length (*flask.Response* attribute), 218
- content_location (*flask.Response* attribute), 218
- content_md5 (*flask.Request* attribute), 211
- content_md5 (*flask.Response* attribute), 218
- content_range (*flask.Response* property), 218
- content_security_policy (*flask.Response* property), 219
- content_security_policy_report_only (*flask.Response* property), 219
- content_type (*flask.Request* attribute), 211
- content_type (*flask.Response* attribute), 219
- context_processor() (*flask.Blueprint* method), 203
- context_processor() (*flask.Flask* method), 180
- cookies (*flask.Request* property), 211
- copy() (*flask.ctx.RequestContext* method), 250
- copy_current_request_context() (in module *flask*), 233
- create_app (*flask.cli.ScriptInfo* attribute), 261
- create_global_jinja_loader() (*flask.Flask* method), 180
- create_jinja_environment() (*flask.Flask* method), 180
- create_url_adapter() (*flask.Flask* method), 180
- cross_origin_embedder_policy (*flask.Response* attribute), 219
- cross_origin_opener_policy (*flask.Response* attribute), 219
- current_app (in module *flask*), 233
- ## D
- data (*flask.cli.ScriptInfo* attribute), 261
- data (*flask.Request* property), 211
- data (*flask.Response* property), 219
- date (*flask.Request* attribute), 211
- date (*flask.Response* attribute), 219
- DEBUG (built-in variable), 79
- debug (*flask.Flask* property), 180
- decorators (*flask.views.View* attribute), 256
- default() (*flask.json.JSONEncoder* method), 243
- default_config (*flask.Flask* attribute), 180
- default_tags (*flask.json.tag.TaggedJSONSerializer* attribute), 244
- delete() (*flask.Blueprint* method), 203
- delete() (*flask.Flask* method), 181
- delete_cookie() (*flask.Response* method), 219
- dict_storage_class (*flask.Request* attribute), 212
- digest_method() (*flask.sessions.SecureCookieSessionInterface* static method), 227
- direct_passthrough (*flask.Response* attribute), 219
- dispatch_request() (*flask.Flask* method), 181
- dispatch_request() (*flask.views.MethodView* method), 257
- dispatch_request() (*flask.views.View* method), 256
- do_teardown_appcontext() (*flask.Flask* method), 181
- do_teardown_request() (*flask.Flask* method), 181
- dump() (in module *flask.json*), 242
- dumps() (*flask.json.tag.TaggedJSONSerializer* method), 244
- dumps() (in module *flask.json*), 242
- ## E
- endpoint (*flask.Request* property), 212
- endpoint() (*flask.Blueprint* method), 204
- endpoint() (*flask.Flask* method), 182
- ensure_sync() (*flask.Flask* method), 182
- ENV (built-in variable), 79
- env (*flask.Flask* attribute), 182
- environ (*flask.Request* attribute), 212
- environment variable
- FLASK_DEBUG, 78, 107, 191
 - FLASK_ENV, 78, 79, 82, 105, 107, 182, 191
 - YOURAPPLICATION_SETTINGS, 82
- error_handler_spec (*flask.Blueprint* attribute), 204
- error_handler_spec (*flask.Flask* attribute), 182
- errorhandler() (*flask.Blueprint* method), 204
- errorhandler() (*flask.Flask* method), 182
- escape() (*flask.Markup* class method), 239
- escape() (in module *flask*), 238
- expires (*flask.Response* attribute), 219
- EXPLAIN_TEMPLATE_LOADING (built-in variable), 81

extensions (*flask.Flask* attribute), 183

F

files (*flask.Request* property), 212

finalize_request() (*flask.Flask* method), 183

first_registration
(*flask.blueprints.BlueprintSetupState* attribute), 252

flash() (in module *flask*), 240

flask
module, 175

Flask (class in *flask*), 175

flask.json
module, 241

flask.json.tag
module, 243

FLASK_DEBUG, 78, 107, 191

FLASK_ENV, 78, 79, 82, 105, 107, 182, 191

FlaskClient (class in *flask.testing*), 230

FlaskCliRunner (class in *flask.testing*), 231

FlaskGroup (class in *flask.cli*), 260

force_type() (*flask.Response* class method), 220

form (*flask.Request* property), 212

form_data_parser_class (*flask.Request* attribute), 212

freeze() (*flask.Response* method), 220

from_app() (*flask.Response* class method), 220

from_envvar() (*flask.Config* method), 247

from_file() (*flask.Config* method), 247

from_json() (*flask.Config* method), 247

from_mapping() (*flask.Config* method), 248

from_object() (*flask.Config* method), 248

from_pyfile() (*flask.Config* method), 248

from_values() (*flask.Request* class method), 212

full_dispatch_request() (*flask.Flask* method), 183

full_path (*flask.Request* property), 212

G

g (in module *flask*), 232

get() (*flask.Blueprint* method), 204

get() (*flask.ctx._AppCtxGlobals* method), 232

get() (*flask.Flask* method), 184

get() (*flask.sessions.SecureCookieSession* method), 228

get_app_iter() (*flask.Response* method), 221

get_command() (*flask.cli.FlaskGroup* method), 260

get_cookie_domain()
(*flask.sessions.SessionInterface* method), 225

get_cookie_httponly()
(*flask.sessions.SessionInterface* method), 225

get_cookie_name() (*flask.sessions.SessionInterface* method), 226

get_cookie_path() (*flask.sessions.SessionInterface* method), 226

get_cookie_samesite()
(*flask.sessions.SessionInterface* method), 226

get_cookie_secure()
(*flask.sessions.SessionInterface* method), 226

get_data() (*flask.Request* method), 212

get_data() (*flask.Response* method), 221

get_etag() (*flask.Response* method), 221

get_expiration_time()
(*flask.sessions.SessionInterface* method), 226

get_flashed_messages() (in module *flask*), 240

get_json() (*flask.Request* method), 213

get_json() (*flask.Response* method), 221

get_namespace() (*flask.Config* method), 249

get_send_file_max_age() (*flask.Blueprint* method), 205

get_send_file_max_age() (*flask.Flask* method), 184

get_template_attribute() (in module *flask*), 246

get_wsgi_headers() (*flask.Response* method), 221

get_wsgi_response() (*flask.Response* method), 221

got_first_request (*flask.Flask* property), 184

got_request_exception (in module *flask*), 253

group() (*flask.cli.AppGroup* method), 261

H

handle_exception() (*flask.Flask* method), 184

handle_http_exception() (*flask.Flask* method), 184

handle_url_build_error() (*flask.Flask* method), 185

handle_user_exception() (*flask.Flask* method), 185

has_app_context() (in module *flask*), 234

has_request_context() (in module *flask*), 233

has_static_folder (*flask.Blueprint* property), 205

has_static_folder (*flask.Flask* property), 185

headers (*flask.Request* attribute), 213

host (*flask.Request* property), 213

host_url (*flask.Request* property), 213

I

if_match (*flask.Request* property), 213

if_modified_since (*flask.Request* property), 213

if_none_match (*flask.Request* property), 213

if_range (*flask.Request* property), 213

if_unmodified_since (*flask.Request* property), 214

import_name (*flask.Blueprint* attribute), 205

import_name (*flask.Flask* attribute), 185

inject_url_defaults() (*flask.Flask* method), 185

input_stream (*flask.Request* attribute), 214

instance_path (*flask.Flask* attribute), 185

invoke() (*flask.testing.FlaskCliRunner* method), 231

is_json (*flask.Request* property), 214

is_json (*flask.Response* property), 222

is_multiprocess (*flask.Request* attribute), 214

`is_multithread` (*flask.Request* attribute), 214
`is_null_session`() (*flask.sessions.SessionInterface* method), 226
`is_run_once` (*flask.Request* attribute), 214
`is_secure` (*flask.Request* property), 214
`is_sequence` (*flask.Response* property), 222
`is_streamed` (*flask.Response* property), 222
`iter_blueprints`() (*flask.Flask* method), 186
`iter_encoded`() (*flask.Response* method), 222

J

`jinja_env` (*flask.Flask* property), 186
`jinja_environment` (*flask.Flask* attribute), 186
`jinja_loader` (*flask.Blueprint* property), 205
`jinja_loader` (*flask.Flask* property), 186
`jinja_options` (*flask.Flask* attribute), 186
`json` (*flask.Request* property), 214
`json` (*flask.Response* property), 222
`JSON_AS_ASCII` (*built-in variable*), 81
`json_decoder` (*flask.Blueprint* attribute), 205
`json_decoder` (*flask.Flask* attribute), 186
`json_encoder` (*flask.Blueprint* attribute), 205
`json_encoder` (*flask.Flask* attribute), 186
`JSON_SORT_KEYS` (*built-in variable*), 81
`JSONDecoder` (*class in flask.json*), 243
`JSONEncoder` (*class in flask.json*), 243
`jsonify`() (*in module flask.json*), 241
`JSONIFY_MIMETYPE` (*built-in variable*), 81
`JSONIFY_PRETTYPRINT_REGULAR` (*built-in variable*), 81
`JSONTag` (*class in flask.json.tag*), 244

K

`key` (*flask.json.tag.JSONTag* attribute), 245
`key_derivation` (*flask.sessions.SecureCookieSessionInterface* attribute), 227

L

`last_modified` (*flask.Response* attribute), 222
`list_commands`() (*flask.cli.FlaskGroup* method), 260
`list_storage_class` (*flask.Request* attribute), 214
`load`() (*in module flask.json*), 242
`load_app`() (*flask.cli.ScriptInfo* method), 261
`load_dotenv`() (*in module flask.cli*), 261
`loads`() (*flask.json.tag.TaggedJSONSerializer* method), 244
`loads`() (*in module flask.json*), 242
`location` (*flask.Response* attribute), 222
`log_exception`() (*flask.Flask* method), 186
`logger` (*flask.Flask* property), 186

M

`main`() (*flask.cli.FlaskGroup* method), 260
`make_conditional`() (*flask.Response* method), 222
`make_config`() (*flask.Flask* method), 186
`make_default_options_response`() (*flask.Flask* method), 187

`make_form_data_parser`() (*flask.Request* method), 214
`make_null_session`() (*flask.sessions.SessionInterface* method), 226
`make_response`() (*flask.Flask* method), 187
`make_response`() (*in module flask*), 235
`make_sequence`() (*flask.Response* method), 223
`make_setup_state`() (*flask.Blueprint* method), 205
`make_shell_context`() (*flask.Flask* method), 187
`Markup` (*class in flask*), 239
`match_request`() (*flask.ctx.RequestContext* method), 250

`MAX_CONTENT_LENGTH` (*built-in variable*), 81
`max_content_length` (*flask.Request* property), 214
`MAX_COOKIE_SIZE` (*built-in variable*), 81
`max_cookie_size` (*flask.Response* property), 223
`max_forwards` (*flask.Request* attribute), 214
`message_flashed` (*in module flask*), 255
`method` (*flask.Request* attribute), 214
`methods` (*flask.views.View* attribute), 257
`MethodView` (*class in flask.views*), 257
`mimetype` (*flask.Request* property), 214
`mimetype` (*flask.Response* property), 223
`mimetype_params` (*flask.Request* property), 214
`mimetype_params` (*flask.Response* property), 223
`modified` (*flask.session* attribute), 225
`modified` (*flask.sessions.SecureCookieSession* attribute), 228
`modified` (*flask.sessions.SessionMixin* attribute), 230
`module`
 flask, 175
 flask.json, 241
 flask.json.tag, 243

N

`name` (*flask.Flask* property), 187
`new` (*flask.session* attribute), 225
`null_session_class` (*flask.sessions.SessionInterface* attribute), 227
`NullSession` (*class in flask.sessions*), 229

O

`on_json_loading_failed`() (*flask.Request* method), 214
`open`() (*flask.testing.FlaskClient* method), 230
`open_instance_resource`() (*flask.Flask* method), 188
`open_resource`() (*flask.Blueprint* method), 205
`open_resource`() (*flask.Flask* method), 188
`open_session`() (*flask.sessions.SecureCookieSessionInterface* method), 227
`open_session`() (*flask.sessions.SessionInterface* method), 227
`options` (*flask.blueprints.BlueprintSetupState* attribute), 252
`origin` (*flask.Request* attribute), 215

P

parameter_storage_class (*flask.Request* attribute), 215

pass_script_info() (*in module flask.cli*), 261

patch() (*flask.Blueprint* method), 206

patch() (*flask.Flask* method), 188

path (*flask.Request* attribute), 215

permanent (*flask.session* attribute), 225

permanent (*flask.sessions.SessionMixin* property), 230

PERMANENT_SESSION_LIFETIME (*built-in variable*), 80

permanent_session_lifetime (*flask.Flask* attribute), 188

pickle_based (*flask.sessions.SessionInterface* attribute), 227

pop() (*flask.ctx.AppCtxGlobals* method), 232

pop() (*flask.ctx.AppContext* method), 251

pop() (*flask.ctx.RequestContext* method), 251

pop() (*flask.sessions.NullSession* method), 229

popitem() (*flask.sessions.NullSession* method), 229

post() (*flask.Blueprint* method), 206

post() (*flask.Flask* method), 188

pragma (*flask.Request* property), 215

PREFERRED_URL_SCHEME (*built-in variable*), 81

preprocess_request() (*flask.Flask* method), 188

PRESERVE_CONTEXT_ON_EXCEPTION (*built-in variable*), 79

preserve_context_on_exception (*flask.Flask* property), 189

process_response() (*flask.Flask* method), 189

PROPAGATE_EXCEPTIONS (*built-in variable*), 79

propagate_exceptions (*flask.Flask* property), 189

provide_automatic_options (*flask.views.View* attribute), 257

push() (*flask.ctx.AppContext* method), 251

push() (*flask.ctx.RequestContext* method), 251

put() (*flask.Blueprint* method), 206

put() (*flask.Flask* method), 189

Q

query_string (*flask.Request* attribute), 215

R

raise_routing_exception() (*flask.Flask* method), 189

range (*flask.Request* property), 215

record() (*flask.Blueprint* method), 206

record_once() (*flask.Blueprint* method), 206

redirect() (*in module flask*), 235

referrer (*flask.Request* attribute), 215

register() (*flask.Blueprint* method), 206

register() (*flask.json.tag.TaggedJSONSerializer* method), 244

register_blueprint() (*flask.Blueprint* method), 207

register_blueprint() (*flask.Flask* method), 189

register_error_handler() (*flask.Blueprint* method), 207

register_error_handler() (*flask.Flask* method), 190

remote_addr (*flask.Request* attribute), 215

remote_user (*flask.Request* attribute), 215

render_template() (*in module flask*), 246

render_template_string() (*in module flask*), 246

Request (*class in flask*), 210

request (*in module flask*), 216

request_class (*flask.Flask* attribute), 190

request_context() (*flask.Flask* method), 190

request_finished (*in module flask*), 253

request_started (*in module flask*), 253

request_tearing_down (*in module flask*), 254

RequestContext (*class in flask.ctx*), 250

Response (*class in flask*), 217

response_class (*flask.Flask* attribute), 190

retry_after (*flask.Response* property), 223

RFC

- RFC 2231, 238
- RFC 822, 241, 243
- RFC 8259, 288, 289

root_path (*flask.Blueprint* attribute), 207

root_path (*flask.Flask* attribute), 190

root_path (*flask.Request* attribute), 215

root_url (*flask.Request* property), 215

route() (*flask.Blueprint* method), 207

route() (*flask.Flask* method), 190

routing_exception (*flask.Request* attribute), 215

run() (*flask.Flask* method), 191

run_command (*in module flask.cli*), 261

S

safe_join() (*in module flask*), 238

salt (*flask.sessions.SecureCookieSessionInterface* attribute), 228

save_session() (*flask.sessions.SecureCookieSessionInterface* method), 228

save_session() (*flask.sessions.SessionInterface* method), 227

scheme (*flask.Request* attribute), 215

script_root (*flask.Request* property), 215

ScriptInfo (*class in flask.cli*), 261

SECRET_KEY (*built-in variable*), 79

secret_key (*flask.Flask* attribute), 191

SecureCookieSession (*class in flask.sessions*), 228

SecureCookieSessionInterface (*class in flask.sessions*), 227

select_jinja_autoescape() (*flask.Flask* method), 192

send_file() (*in module flask*), 236

SEND_FILE_MAX_AGE_DEFAULT (*built-in variable*), 80

send_file_max_age_default (*flask.Flask* attribute), 192

send_from_directory() (*in module flask*), 238

send_static_file() (*flask.Blueprint* method), 208

send_static_file() (*flask.Flask* method), 192

serializer (*flask.sessions.SecureCookieSessionInterface* attribute), 228

- server (*flask.Request* attribute), 215
 - SERVER_NAME (*built-in variable*), 80
 - session (*class in flask*), 224
 - session_class (*flask.sessions.SecureCookieSessionInterface* attribute), 228
 - SESSION_COOKIE_DOMAIN (*built-in variable*), 80
 - SESSION_COOKIE_HTTPONLY (*built-in variable*), 80
 - SESSION_COOKIE_NAME (*built-in variable*), 79
 - session_cookie_name (*flask.Flask* attribute), 192
 - SESSION_COOKIE_PATH (*built-in variable*), 80
 - SESSION_COOKIE_SAMESITE (*built-in variable*), 80
 - SESSION_COOKIE_SECURE (*built-in variable*), 80
 - session_interface (*flask.Flask* attribute), 192
 - SESSION_REFRESH_EACH_REQUEST (*built-in variable*), 80
 - session_transaction() (*flask.testing.FlaskClient* method), 231
 - SessionInterface (*class in flask.sessions*), 225
 - SessionMixin (*class in flask.sessions*), 229
 - set_cookie() (*flask.Response* method), 223
 - set_data() (*flask.Response* method), 224
 - set_etag() (*flask.Response* method), 224
 - setdefault() (*flask.ctx._AppCtxGlobals* method), 232
 - setdefault() (*flask.sessions.NullSession* method), 229
 - setdefault() (*flask.sessions.SecureCookieSession* method), 228
 - shallow (*flask.Request* attribute), 215
 - shell_command (*in module flask.cli*), 261
 - shell_context_processor() (*flask.Flask* method), 192
 - shell_context_processors (*flask.Flask* attribute), 192
 - should_ignore_error() (*flask.Flask* method), 192
 - should_set_cookie() (*flask.sessions.SessionInterface* method), 227
 - signal() (*flask.signals.Namespace* method), 255
 - signals.Namespace (*class in flask*), 255
 - signals.signals_available (*in module flask*), 253
 - static_folder (*flask.Blueprint* property), 208
 - static_folder (*flask.Flask* property), 192
 - static_url_path (*flask.Blueprint* property), 208
 - static_url_path (*flask.Flask* property), 193
 - status (*flask.Response* property), 224
 - status_code (*flask.Response* property), 224
 - stream (*flask.Request* property), 215
 - stream (*flask.Response* property), 224
 - stream_with_context() (*in module flask*), 249
 - striptags() (*flask.Markup* method), 239
 - subdomain (*flask.blueprints.BlueprintSetupState* attribute), 252
- T**
- tag() (*flask.json.tag.JSONTag* method), 245
 - tag() (*flask.json.tag.TaggedJSONSerializer* method), 244
 - TaggedJSONSerializer (*class in flask.json.tag*), 243
 - teardown_app_request() (*flask.Blueprint* method), 208
 - teardown_appcontext() (*flask.Flask* method), 193
 - teardown_appcontext_funcs (*flask.Flask* attribute), 193
 - teardown_request() (*flask.Blueprint* method), 208
 - teardown_request() (*flask.Flask* method), 193
 - teardown_request_funcs (*flask.Blueprint* attribute), 208
 - teardown_request_funcs (*flask.Flask* attribute), 194
 - template_context_processors (*flask.Blueprint* attribute), 209
 - template_context_processors (*flask.Flask* attribute), 194
 - template_filter() (*flask.Flask* method), 194
 - template_folder (*flask.Blueprint* attribute), 209
 - template_folder (*flask.Flask* attribute), 194
 - template_global() (*flask.Flask* method), 194
 - template_rendered (*in module flask*), 253
 - template_test() (*flask.Flask* method), 194
 - TEMPLATES_AUTO_RELOAD (*built-in variable*), 81
 - templates_auto_reload (*flask.Flask* property), 195
 - test_cli_runner() (*flask.Flask* method), 195
 - test_cli_runner_class (*flask.Flask* attribute), 195
 - test_client() (*flask.Flask* method), 195
 - test_client_class (*flask.Flask* attribute), 196
 - test_request_context() (*flask.Flask* method), 196
 - TESTING (*built-in variable*), 79
 - testing (*flask.Flask* attribute), 197
 - to_json() (*flask.json.tag.JSONTag* method), 245
 - to_python() (*flask.json.tag.JSONTag* method), 245
 - TRAP_BAD_REQUEST_ERRORS (*built-in variable*), 79
 - trap_http_exception() (*flask.Flask* method), 197
 - TRAP_HTTP_EXCEPTIONS (*built-in variable*), 79
 - try_trigger_before_first_request_functions() (*flask.Flask* method), 197
- U**
- unescape() (*flask.Markup* method), 239
 - untag() (*flask.json.tag.TaggedJSONSerializer* method), 244
 - update() (*flask.sessions.NullSession* method), 229
 - update_template_context() (*flask.Flask* method), 197
 - url (*flask.Request* property), 216
 - url_build_error_handlers (*flask.Flask* attribute), 197
 - url_charset (*flask.Request* property), 216
 - url_default_functions (*flask.Blueprint* attribute), 209
 - url_default_functions (*flask.Flask* attribute), 198
 - url_defaults (*flask.blueprints.BlueprintSetupState* attribute), 252
 - url_defaults() (*flask.Blueprint* method), 209
 - url_defaults() (*flask.Flask* method), 198
 - url_for() (*in module flask*), 234

`url_map` (*flask.Flask* attribute), 198
`url_map_class` (*flask.Flask* attribute), 198
`url_prefix` (*flask.blueprints.BlueprintSetupState* attribute), 252
`url_root` (*flask.Request* property), 216
`url_rule` (*flask.Request* attribute), 216
`url_rule_class` (*flask.Flask* attribute), 198
`url_value_preprocessor()` (*flask.Blueprint* method), 209
`url_value_preprocessor()` (*flask.Flask* method), 198
`url_value_preprocessors` (*flask.Blueprint* attribute), 209
`url_value_preprocessors` (*flask.Flask* attribute), 198
`USE_X_SENDFILE` (*built-in variable*), 80
`use_x_sendfile` (*flask.Flask* attribute), 198
`user_agent` (*flask.Request* property), 216
`user_agent_class` (*flask.Request* attribute), 216

V

`values` (*flask.Request* property), 216
`vary` (*flask.Response* property), 224
`View` (*class in flask.views*), 256
`view_args` (*flask.Request* attribute), 216
`view_functions` (*flask.Blueprint* attribute), 209
`view_functions` (*flask.Flask* attribute), 199

W

`want_form_data_parsed` (*flask.Request* property), 216
`with_appcontext()` (*in module flask.cli*), 261
`wsgi_app()` (*flask.Flask* method), 199
`www_authenticate` (*flask.Response* property), 224

Y

`YOURAPPLICATION_SETTINGS`, 82